

HUAREAL
Efficient
Cutting tools



2024-2025

CATALOGUE

HUAREAL

2024-2025 |
HUAREAL CUTTING TOOLS
CATALOGUE

TURNING

MILLING

DRILLING



Zhuzhou Huarui Precision Cutting Tools Co., Ltd.
Address: No.68 Chuangye 2nd RD., Lusong District, Zhuzhou, Hunan, P.R.China
Postal code: 412000 Tel.: 0731-28216690 Stock code: 688059
Website: www.huareal.com.cn

*Create a world-famous cutting tool brand
Become a prestigious enterprise.*



Content

A Turning

General turning	A01-A97
Turning of small components	A98-A144
Parting and grooving	A145-A158
Threading	A159-A193

B Milling

Indexable milling	B01-B81
Solid carbide end mills	B82-B196

C Drilling

Indexable short hole drills	C01-C16
Solid carbide drills	C17-C74

D General technical information

General technical information	D01-D26
-------------------------------	---------

Introduction

■ This catalogue presents Huareal's major cutting products as of October 2023.

■ This catalogue mainly introduces turning tools, milling tools and drilling tools. Wherein:

Turning tools include general turning, Turning of small components, parting and grooving tool and threading tool;

Milling tools include indexable milling tool and solid carbide end mill;

Drilling tools include indexable short hole drills and solid carbide drill.

■ Products in this catalogue may be attached with the following symbols:

Indexable inserts: ★ Recommended grade ☆ Available grade

Indexable cutting tools: ▲ Standing inventory △ Make-to-order

Solid carbide cutting tool: ● Standing inventory ○ Make-to-order

Application: ☀ Fit well ⚙ Applicable

■ Product dimensions

The basic dimensions of products in this catalogue are marked according to the ISO13399 Standard, and the specific symbols and corresponding definitions are following attached. According to the ISO13399 Standard, customers can input cutting tool information into PLM, CAD, CAM, CNC, etc. without replacing data from different companies.

Huareal is actively engaged in providing "cutting tool data" based on the ISO13399 Standard.

Overview of dimension codes according to ISO13399 Standard

Parameter	Definition	Parameter	Definition
ADJLN	Minimum adjustment limit	CICTE	Cutting item count - limit position
ADJLX	Maximum adjustment limit	CICTP	Cutting item count - peripheral position
ADJRG	Adjustment range	CICTS	Cutting item count - side position
ALP	Clearance angle axial	CICTSP	Cutting item count - cutter bar protection insert
AN	Clearance angle major	CICTT	Cutting item count - total amount
ANN	Clearance angle minor	CND	Coolant entry diameter
APMX	Depth of cut maximum	CNSC	Coolant entry style code
APMX_EFW	Depth of cut maximum in feed direction end	CNT	Coolant entry thread size
APMX_FFW	Depth of cut maximum in feed direction side	COATING	Coating
AZ	Maximum plunge depth	CP	Maximum coolant pressure
B	Shank width	CRKS	Connection retention knob thread size
BAWS	Body angle workpiece side	CRNT	Coolant radial entry thread size
BAMS	Body angle machine side	CTPT	Operation type
BBD	Balanced by design	CUTDIA	Workpiece parting diameter maximum
BBR	Balanced by rotational test	CW	Cutting width
BCH	Corner chamfer length	CWN	Minimum cutting width
BD	Body diameter	CWTOLL	Insert width lower tolerance
BHTA	Body half taper angle	CWTOLU	Insert width upper tolerance
BN	Face land width	CWX	Cutting width maximum
BS	Wiper edge length	CXSC	Coolant exit style code
BSG	Basic standard group	CZC	Connection size code
BSR	Wiper edge radius	CZCMS	Connection size code machine side
CDX	Cutting depth maximum	CZCWS	Connection size code workpiece side
CEMR	Cutting edge main radius	D1	Fixing hole diameter
CF	Spot chamfer	DAH	Diameter access hole
CHBA	Chamfer body angle	DAXIN	Axial groove inside diameter minimum
CHBL	Chamfer body length	DAXN	Face groove outside diameter minimum
CHW	Corner chamfer width	DAXX	Axial groove outside diameter maximum
CICT	Cutting item count	DBC	Diameter bolt circle
CICTBALL	Cutting item count - ball nose insert	DC	Cutting diameter
DCB	Connection bore diameter	KRINS	Major cutting edge angle
DCBN	Connection bore diameter minimum	KWW	Keyway width
DCBX	Connection bore diameter maximum	L	Cutting edge length
DCF	Cutting diameter face contact	LAMS	Inclination angle
DCIN	Cutting inside diameter	LB	Body length
DCN	Cutting diameter minimum	LCF	Length chip flute
DCON	Connection diameter	LCOX	Cut off length maximum
DCONMS	Connection diameter machine side	LE	Cutting edge effective length
DCONWS	Connection diameter workpiece side	LF	Functional length
DCONNWS	Interface diameter minimum workpiece side	LFN	Functional length minimum








Overview of dimension codes according to ISO13399 Standard

Parameter	Definition	Parameter	Definition
DCONXWS	Connection diameter maximum workpiece side	LH	Cutting head length
DCPS	Data chip provision size	LPR	Protruding length
DCSFMS	Contact surface diameter machine side	LS	Shank length
DCSFWS	Contact surface diameter workpiece side	LSC	Clamping length
DCX	Cutting diameter maximum	LSCN	Clamping length minimum
DHUB	Hub diameter	LSCS	Distance to clamping starting point
DIX	Tool changer interference diameter maximum	LSCX	Clamping length maximum
DMIN	Minimum bore diameter	LSD	Dead shank length
DMM	Shank diameter	LU	Usable length (max. recommended)
DN	Neck diameter	LU_BFW	Usable length - back face milling
DRVCT	Number of drives	LUX	Usable length maximum
DSGN	Design	MHD	Mounting hole distance
EPSR	Insert inclined angle	MIID	Master insert identification
FHA	Flute helix angle	MIIDE	Master insert identification - limit position
FLGT	Flange thickness	MIIDS	Master insert identification - side position
FTDZ	Thread diameter size	MIIDC	Master insert identification - central position
GB	Face land angle	MIIDP	Master insert identification - peripheral position
H	Shank height	MIIDI	Master insert identification - in-between position
HA	Theoretical thread height	MMCC	Code for preset torque
HB	Thread height difference	MMCX	Max.cutting torque
HBH	Head bottom offset height	NOF	Flute count
HC	Thread height actual	NT	Tooth count
HF	Functional height	OAH	Overall height
HRY	Lowest point from reference plain	OAL	Overall length
HTB	Body height	OAW	Overall width
HTH	Height	OH	Overhang recommended
IC	Inscribed circle diameter	OHN	Overhang minimum
INSL	Insert length	OHX	Overhang maximum
INSUC	Insert usage code	ORDCODE	Ordercode
IZC	Insert size code	PCL	Peripheral cylindrical length
KAPR	Tool cutting edge angle	PDX	Profile distance ex
KAPR_EFW	Tool cutting edge angle - end feed	PDY	Profile distance ey
KCH	Corner chamfer	PHD	Premachined hole diameter
PHDX	Premachined hole diameter maximum	TCT	Tolerance class tool
PL	Point length	TCTR	Thread tolerance class
PNA	Profile included angle	TD	Thread diameter
PRFRAD	Profile radius	TDZ	Thread diameter size
PRSPC	Profile specification	TFLA	Tap floating length ahead
PSIR	Tool lead angle	TFLB	Tap floating length behind
PSIRL	Cutting edge angle major left hand	TG	Tap gradient




Overview of dimension codes according to ISO13399 Standard

Parameter	Definition	Parameter	Definition
PSIRR	Cutting edge angle major right hand	THBTP	Thread back taper characteristics
PSW	Premachined groove width	THCA	Thread spiral correction angle
RADH	Radial body height	THCHT	Threading chamfer type
RADW	Radial body width	THFT	Thread form
RAR	Clearance angle right hand	THFTS	Standard series thread profile
RE	Corner fillet radius	THL	Thread length
REEQ	Corner fillet radius equivalence	THUB	Hub thickness
REL	Corner fillet radius left hand	TP	Thread pitch
RER	Corner fillet radius right hand	TPI	Threads per inch
RETOLL	Corner radius lower tolerance	TPIN	Threads per inch minimum
RETOLU	Corner radius upper tolerance	TPIX	Threads per inch maximum
RGL	Regrind length	TPN	Thread pitch minimum
RMPX	Ramping angle maximum	TPT	Thread profile type
RPMX	Rotational speed maximum	TPX	Thread pitch maximum
S	Insert thickness	TRMAX	Tap range maximum
SDL	Step diameter length	TQ	Torque
SIG	Corner angle	TSYC	Tool style code
SPTL	Parting line	TTP	Thread type
SSC	Insert seat model	ULDR	Diameter ratio of machinable length
SSCE	Insert seat size code - limit position	VCX	Cutting speed maximum
SSCP	Insert seat size code - peripheral position	W1	Insert width
SSCS	Insert seat size code - side position	WB	Body width
STA	Step inclined angle	WF	Functional width
STDNO	Standard Number	WFCIRP	Width to reference point of cutting parts
SUBSTRATE	Tool substrate	WSC	Clamping width
TCDC	Tolerance class cutting diameter	WT	Weight
TCDCON	Interface diameter tolerance	ZADJ	Adjustable insert count
TCDMM	Shank diameter tolerance	ZEFF	Face effective cutting edge count
TCHA	Achievable hole tolerance	ZEFP	Peripheral effective cutting edge count (ZEFP)
TCHAL	Achievable hole lower tolerance	ZWX	Number of wiper edge inserts maximum
TCHAU	Achievable hole upper tolerance		

Examples of basic dimension according to ISO13399 Standard

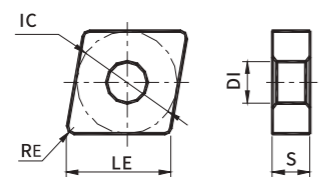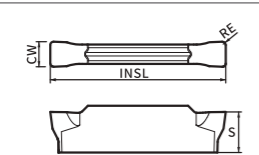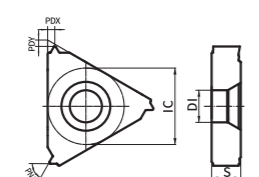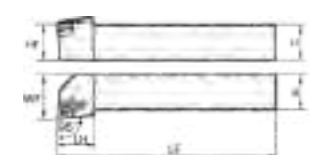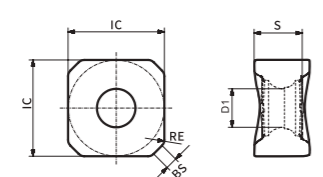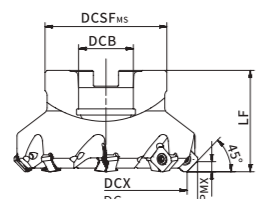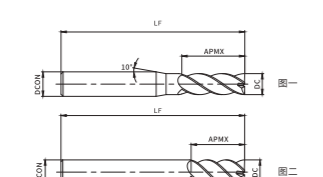Tool type	Basic size marking form	Code	Definition
Turning insert		IC	Inscribed circle diameter
		LE	Cutting edge length
		S	Insert thickness
		D1	Insert hole diameter
		RE	Corner radius
Parting and grooving insert		INSL	Insert length
		CW	Insert width
		S	Insert thickness
		RE	Corner radius
Thread insert		IC	Inscribed circle diameter
		PDX	Profile distance ex
		PDY	Profile distance ey
		S	Insert thickness
		DI	Insert hole diameter
		PNA	Angle profile
Turning tool		H	Shank height
		B	Shank width
		LF	Overall length
		LH	Cutting head length
		HF	Functional height
		WF	Functional width
Indexable milling insert		IC	Inscribed circle diameter
		S	Insert thickness
		D1	Insert hole diameter
		BS	Wiper edge length
		RE	Corner radius
Indexable milling tool		DC	Cutting diameter
		DCB	Bolt diameter
		DCX	Cutting diameter maximum
		DCSFMS	Contact surface diameter machine side
		LF	Overall length
		APMX	Cutting depth maximum
		DC	Cutting diameter
Solid carbide end mill		DC	Cutting diameter
		DCON	Shank connection diameter
		LF	Overall length
		APMX	Cutting depth maximum
		ZEFP	Peripheral effective cutting edge count


Examples of basic dimension according to ISO13399 Standard

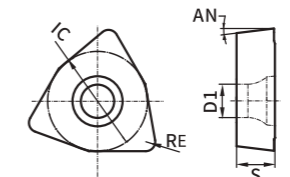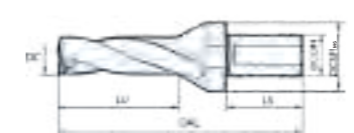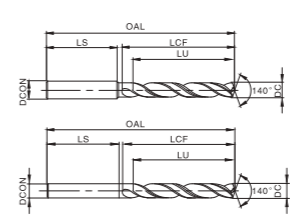Tool type	Basic size marking form	Code	Definition
Short hole drilling insert		IC	Inscribed circle diameter
		D1	Insert hole diameter
		S	Insert thickness
		RE	Corner radius
		AN	Clearance angle major
Short hole drilling tool		DC	Cutting diameter
		DCON	Shank connection diameter
		DCSFMS	Connection diameter machine side
		LS	Shank length
		LU	Usable length
		OAL	Overall length
Solid carbide drill		DC	Cutting diameter
		DCON	Shank connection diameter
		OAL	Overall length
		LCF	Length chip flute
		LS	Shank length
		LU	Usable length

Sticker Sample

Insert type - ISO	WNUMG080408-GM
Insert type - Metic	WNUMG432-GM
Grade	HR8225
Quantity	10pcs

CUTTING CONDITIONS							
<table border="1"> <tr> <td>P</td> <td>M</td> <td>K</td> <td>N</td> <td>S</td> <td>H</td> </tr> </table>	P	M	K	N	S	H	Application classification
P	M	K	N	S	H		
<table border="1"> <tr> <td>●</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	●						
●							
P Vc: 200-300 m/min 750-990 sfm fn: 0.2-0.4 mm/r 0.008-0.017 in/r ap: 2-4 mm/r 0.08-0.17 in	Cutting speed Feed rate Cutting depth * upper-ISO lower-Metric Maximum limit Minimum limit						
Zhuzhou Huarui Precision Cutting Tools Co., Ltd. 证券简称: 华锐精密 Stock code: 688059 MADE IN CHINA							

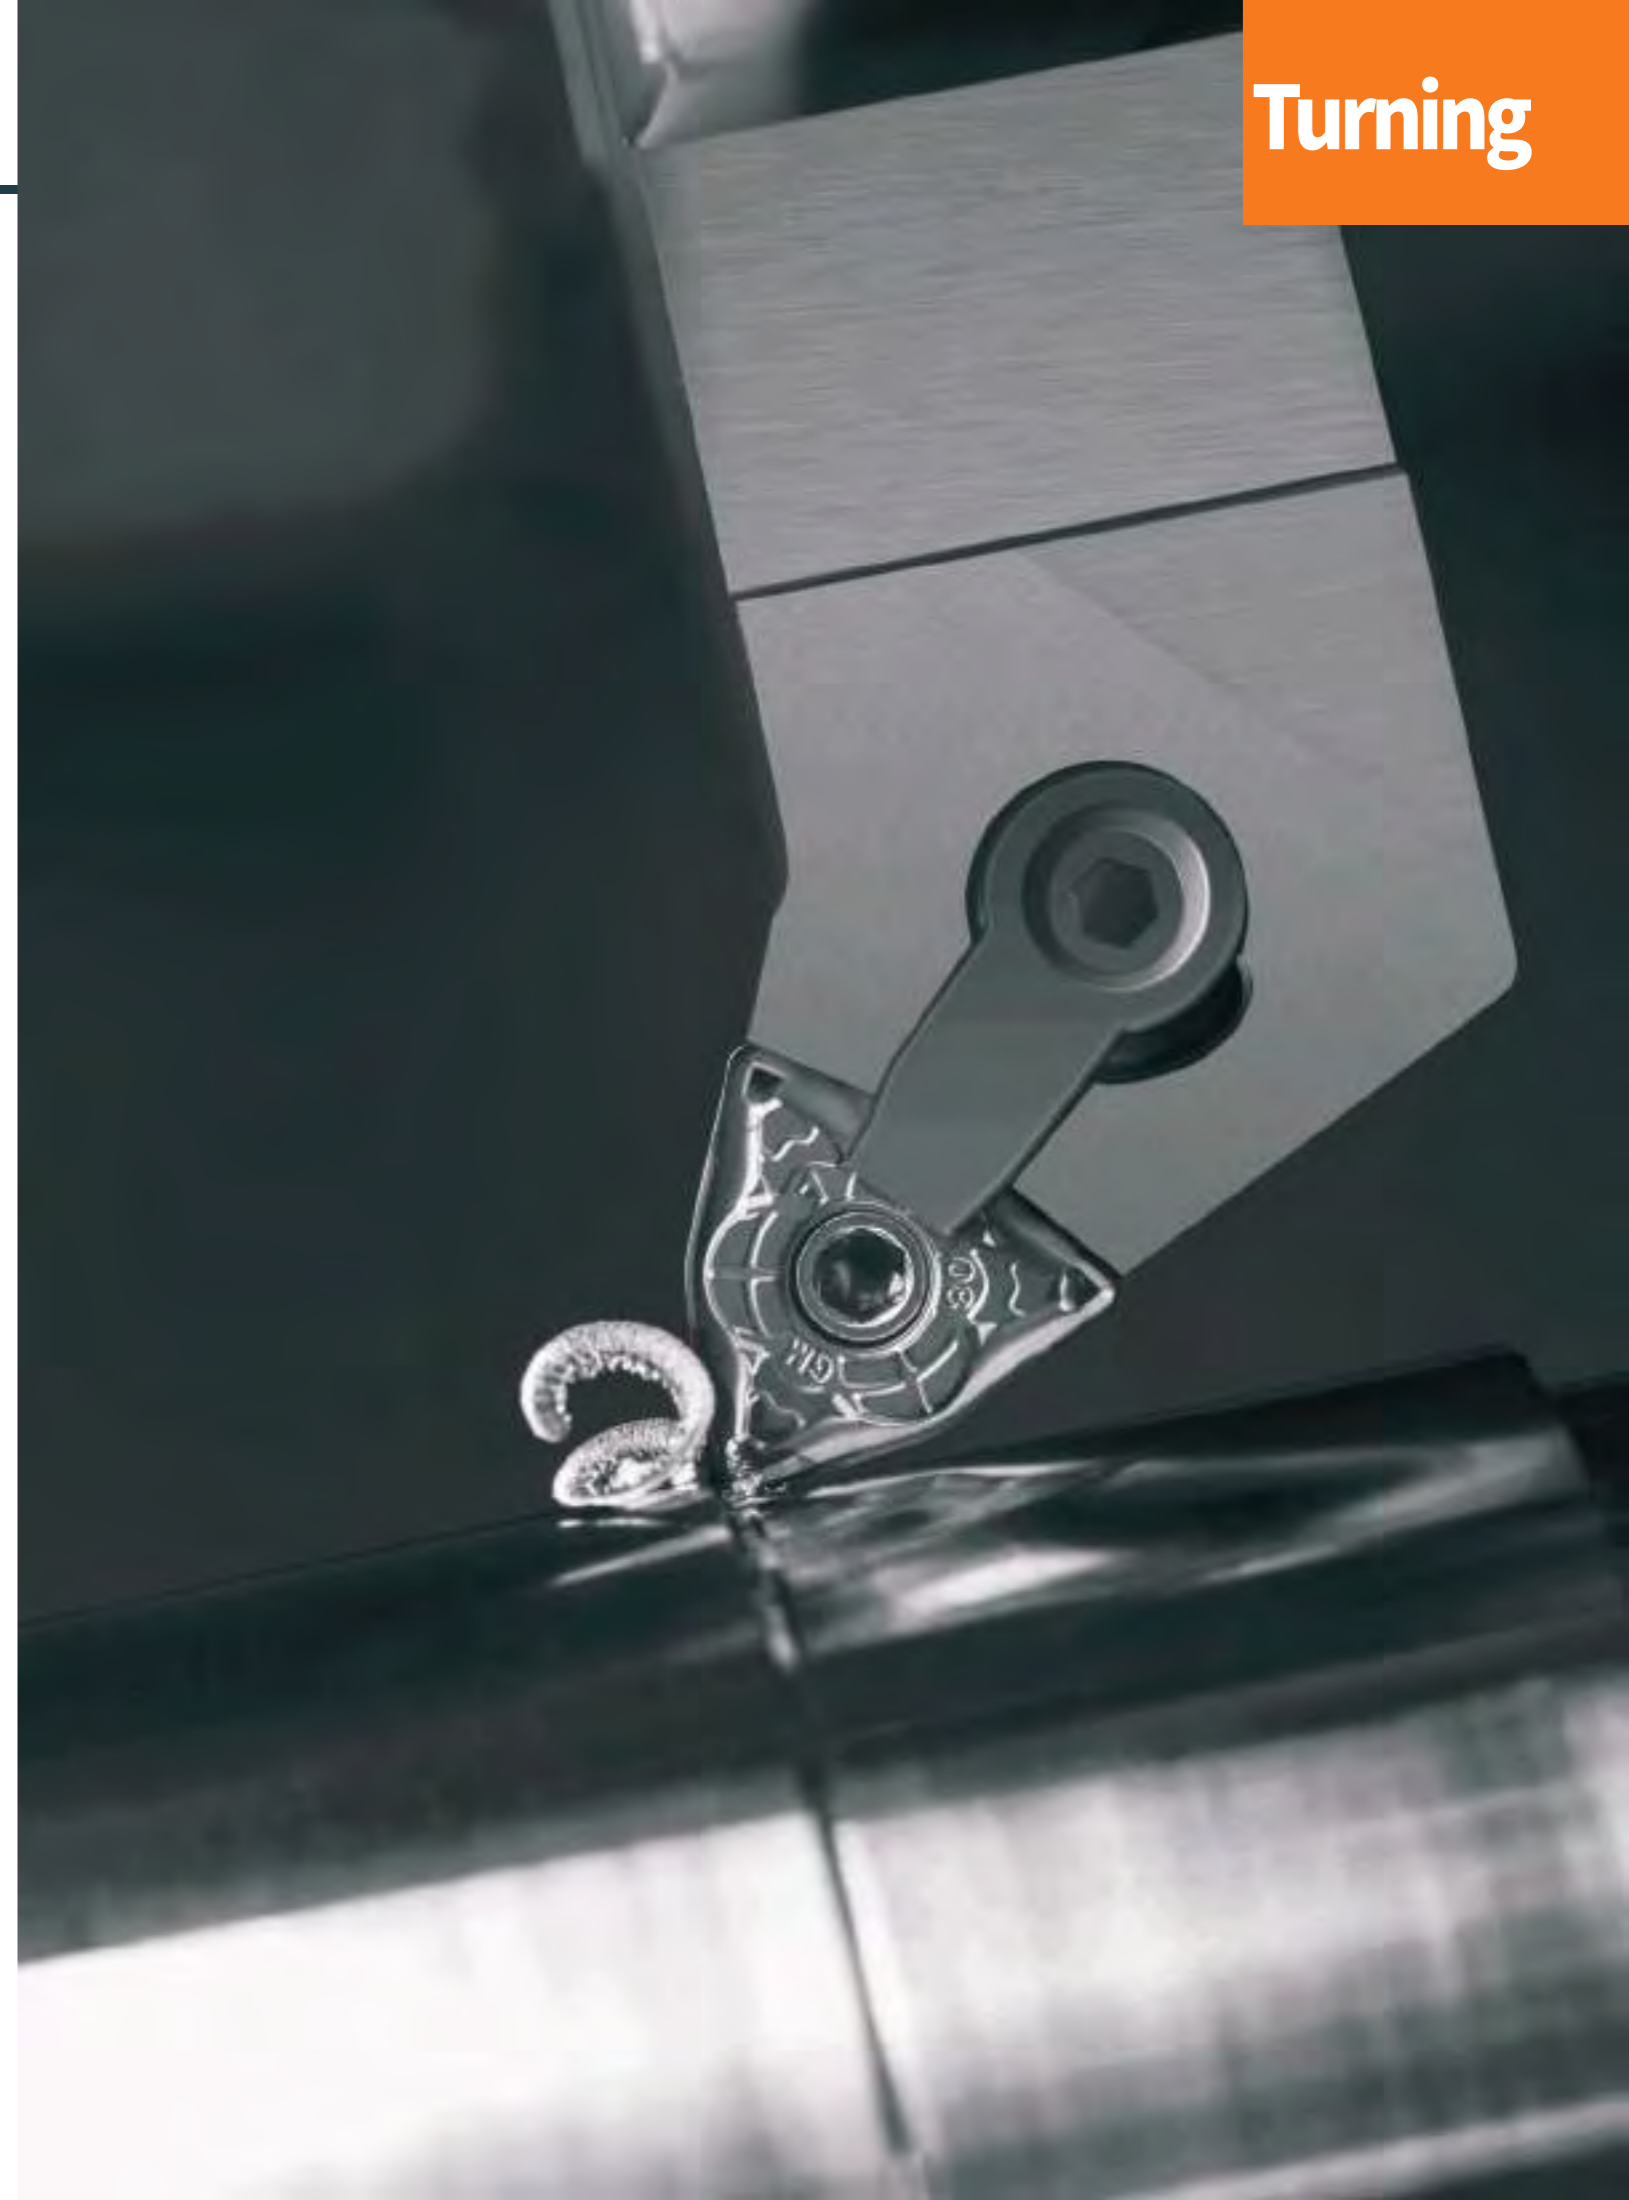

Selection guidance of general turning insert

Description of turning insert overview

i According to the order of shape:

C - type → D - type → S - type → T - type → V - type → W - type → R - type

ii According to the order of clearance angle:

Negative insert

Positive insert

iii According to the processing method:

Finishing → Medium → Roughing → Heavy machining

Instructions for insert specifications and models

Insert shape, angle

80° CN □ □

Workpiece materials:

- Steel
- Stainless steel
- Cast iron
- Non-ferrous metal
- Heat resistant super alloys
- Titanium alloy

Cutting condition:

Stable : continuously stable cutting
Average : for general cutting
Tough : Heavy interrupted or unstable condition

Dimensioned structure drawing of inserts with marking
LE: Length of cutting edge
IC: Inscribed circle
S: Thickness
DI: Hole diameter
RE: Nose radius

Insert machining type:
Finishing, medium,
roughing and heavy
machining

Processing	Insert shape	Type	Dimension (mm)						CVD		PVD		Cemented carbide		Cermet					
			LE	IC	S	DI	RE	HR8115	HR8125	HR8215	HR8225	HR7115	HR7125	HR5125		HR5225	HRK10	HRK20	HRC10	HRC20
Finishing		CNMG120404-GF	12.9	12.7	4.76	5.16	0.4	★ ☆ ★	★ ☆ ★											
		CNMG120408-GF	12.9	12.7	4.76	5.16	0.8	★ ☆ ★	★ ☆ ★											
Finishing		CNMG120404-BF	12.9	12.7	4.76	5.16	0.4				☆ ★	★								
		CNMG120408-BF	12.9	12.7	4.76	5.16	0.8				☆ ★	★								
Semi-finishing		CNMG120404-GM	12.9	12.7	4.76	5.16	0.4	★ ☆ ★	★ ☆ ★											
		CNMG120408-GM	12.9	12.7	4.76	5.16	0.8	★ ☆ ★	★ ☆ ★											
		CNMG120412-GM	12.9	12.7	4.76	5.16	1.2	★ ☆ ★	★ ☆ ★											
		CNMG160608-GM	16.1	15.875	6.35	6.35	0.8	★ ☆ ★	★ ☆ ★											
Semi-finishing		CNMG160612-GM	16.1	15.875	6.35	6.35	1.2	★ ☆ ★	★ ☆ ★											
		CNMG160616-GM	16.1	15.875	6.35	6.35	1.6	★ ☆ ★	★ ☆ ★											
		CNMG120404-BM	12.9	12.7	4.76	5.16	0.4				☆ ★	★								
Semi-finishing		CNMG120408-BM	12.9	12.7	4.76	5.16	0.8				☆ ★	★								
		CNMG120412-BM	12.9	12.7	4.76	5.16	1.2				☆ ★	★								

Insert shape Description Dimension Inventory Grade information



Turning

General turning

- ◆ General turning application overview
- ◆ Turning grade overview
- ◆ Turning inserts code key
- ◆ Overview of general turning inserts
- ◆ General turning insert
 - ◆ Cemented carbide turning insert
 - ◆ Cermet turning insert
- ◆ General turning tools code key
 - ◆ General external turning tools code key
 - ◆ General internal turning tools code key
- ◆ General turning tools overview
- ◆ General turning tools
 - ◆ External turning holders by P-type clamping
 - ◆ External turning holders by M-type clamping
 - ◆ Internal turning holders by S-type clamping
- ◆ Technical information for general turning

Turning of small components

- ◆ Small components turning application
- ◆ Small components turning grade overview
- ◆ Small components turning insert overview
- ◆ Small components turning insert
- ◆ Back turning insert code key
- ◆ Cody key of external turning tools for small components
- ◆ Cody key of internal turning tools for small components
- ◆ Turning of small components
- ◆ Shallow groove insert code key
- ◆ Shallow groove tools code key
- ◆ Shallow groove turning insert shallow groove tools
- ◆ Shallow groove insert customization form
- ◆ Recommended cutting parameters for shallow groove insert
- ◆ Parting & grooving insert code key for small components
- ◆ Parting & grooving tool code key for small components

Parting and grooving

- ◆ Code key of parting and grooving inserts
- ◆ Overview of parting and grooving tools
- ◆ Parting and grooving inserts
- ◆ Parting and grooving tools
- ◆ Technical information for parting and grooving

Threading

- ◆ Code key of thread insert
- ◆ Overview of threading
- ◆ Thread insert
- ◆ Thread tools
- ◆ Technical information for threading

A

Grade code key



① Grade code

② Classification codes

Number	5	6	7	8	9
Classification of workpiece materials	General	Cast iron	Stainless steel	Steel	High-temp alloy

③ Number of grades in the same group

- 1-1st generation
- 2-2nd generation
- 3-3rd generation

④ ISO material classification number

05	10
15	20
25	30
35	40

Overview of general turning grades

Type	Workpiece material	ISO	CVD coating						PVD coating					Cemented carbide		Cermet		ISO				
			HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20		HFC10	HR115C		
P	Unalloyed steel/Alloyed steel	P01																		P01		
		P05	HR8105																		P05	
		P10		HR8115						HR1135										HFC10	HR115C	P10
		P15			HR8125																	P15
		P20				HR8225																P20
		P25					HR8135							HR7125	HR7225	HR5125	HR5225				HR115C	P25
		P30																				P30
		P35																				P35
		P40																				P40
		P45																				P45
		P50																				P50
M	Stainless steel	M05										HR7115									M05	
		M10								HR1135											M10	
		M15																			M15	
		M20											HR7125	HR7225	HR5125	HR5225					M20	
		M25																			M25	
		M30																			M30	
		M35																			M35	
		M40																			M40	
		M45																			M45	
		K	Cast iron	K01																		K01
				K05																		K05
K10																				K10		
K15																				K15		
K20									HR6115											K20		
K25																				K25		
K30																				K30		
K35																				K35		
K40																				K40		
K45																				K45		
K50																				K50		
N	Aluminum/Aluminum alloy	N01														HRK10				N01		
		N05															HRK20			N05		
		N10																		N10		
		N15																		N15		
		N20																		N20		
		N25																		N25		
		N30																		N30		
		N40																		N40		
		S	Heat resistant super alloys Titanium alloy	S01								HR9105										S01
				S05																		S05
S10											HR7115									S10		
S15																				S15		
S20												HR7125								S20		
S25													HR7225								S25	
S30																					S30	

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Turning grade overview

Grade type	Grade	ISO	Color	Coating type	Coating Composition	Characteristics
Coated Carbide	HR8105	ISO P	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	<ul style="list-style-type: none"> • Suitable for steel turning under stable working condition • Brand new coating combine with high red hardness carbide substrate shows outstanding wear resistance and plastic deformation resistance
	HR8115	ISO P	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	<ul style="list-style-type: none"> • Suitable for light intermittent and continuous machining of steel • The proprietary substrate of gradient alloy structure formed by special sintering process, together with thick TiCN, thick Al₂O₃, and sophisticated coating post treatment, greatly improves the wear resistance. It is suitable for finishing and semi-finishing of carbon steel and alloy steel
	HR8125	ISO P	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	<ul style="list-style-type: none"> • Suitable for intermittent machining and continuous machining of steel • It has adopted the strengthen binder phase which can effectively inhibit the high temperature plastic deformation of the substrate; The high binder phase content functional gradient layer effectively controlled the crack propagation of the coating;
	HR8225	ISO P	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	<ul style="list-style-type: none"> • Preferred grade for steel turning; suitable for intermittent and continuous machining of steel, Strong universality • Brand new well-distributed refined hard phase substrate combine with composite multilayer CVD coating, outstanding wear resistance and toughness
	HR8135	ISO P	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	<ul style="list-style-type: none"> • Grade for steel turning of strong impact working condition • High toughness matrix composition, reinforced bonding phase, with excellent impact strength, suitable for turning under strong impact conditions.

Grade type	Grade	ISO	Color	Coating type	Coating Composition	Characteristics
Coated Carbide	HR1135	ISO P, M	Bronze	PVD	AlTiSiN+TiSiN	<ul style="list-style-type: none"> • Precision small components turning high wear resistance grade • The fine-grain cemented carbide matrix with the new nano-gradient composite structural coating has excellent wear resistance and build-up edge resistance, ensuring the stability of the insert life and the high quality of the machined surface.
	HR7125	ISO M	Ash black	PVD	AlTiN	<ul style="list-style-type: none"> • Universal grade for continuous and intermittent turning of stainless steel • Unique coating materials combined with new coating technology, the surface of the coated product is smooth, with low friction coefficient, high nano hardness, and excellent antioxidant performance.
	HR7225	ISO M	Bronze	PVD	AlTiSiN+TiSiN	<ul style="list-style-type: none"> • Preferred grade for stainless steel turning • The new non-metallic modified component reinforced nano-gradient composite structure "H2-Flex" coating, with uniformly refined submicron hard phase and optimized bonding phase composition, has excellent wear resistance and toughness.
	HR6115	ISO K	Black	CVD	TiN+MT-TiCN+Al ₂ O ₃	<ul style="list-style-type: none"> • Preferred grade for cast iron turning • The thickened CVD black coating and special coating post-treatment have excellent wear resistance and toughness, suitable for turning various cast iron materials and can also be used for rough machining of high-strength steel.
HR7115	ISO M, S	Bronze	PVD	AlTiSiN+TiSiN	<ul style="list-style-type: none"> • Preferred grade for high-temperature alloy and difficult-to-cut material • The subfine grain carbide matrix combined with a new nano-gradient composite structure coating, special surface treatment technology, with excellent wear resistance, oxidation resistance and processing stability, suitable for turning of titanium alloys, superalloys, etc. 	

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A3

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A4

Turning grade overview

Grade type	Grade	ISO	Color	Coating type	Coating Composition	Characteristics
Coated Carbide	HR9105	ISO S	Gray	PVD	AlCrN	<ul style="list-style-type: none"> Secondary grade for high-temperature alloy and difficult-to-cut material The high red hardness alloy matrix paired with ultra-high hardness nano coating has excellent high-temperature wear resistance and adhesive wear resistance.
	HR5125	ISO P、M	Ash black	PVD	AlTiN	<ul style="list-style-type: none"> General grade for thread machining The strong toughness alloy matrix paired with a high hardness nano coating, which has excellent bonding force and extremely high toughness and edge strength.
	HR5225	ISO P、M	Bronze	PVD	AlTiSiN+TiSiN	<ul style="list-style-type: none"> High wear resistance grade for threading machining The sub micro crystalline matrix phase is combined with the new nano-gradient composite structure coating, which has excellent anti-build-up edge and anti-chipping properties. Suitable for thread machining of steel and stainless steel

Grade type	Grade	ISO	Color	Coating type	Coating Composition	Characteristics
Cemented carbide	HRK10	ISO N	Silver Grey	Uncoated	/	<ul style="list-style-type: none"> Preferred grade for aluminum alloy turning Uncoated cemented carbide material, fine particle matrix material, uniform particle size, high bending strength and good wear resistance.
	HRK20	ISO N	Silver Grey	Uncoated	/	<ul style="list-style-type: none"> General grade for aluminum alloy turning Uncoated cemented carbide material, with excellent wear resistance and anti-chipping properties, also excellent versatility
Cermet	HRC10	ISO P	Silver Grey	Uncoated	/	<ul style="list-style-type: none"> Good consistency, especially suitable for low carbon steel finishing turning, as well as the workpiece surface quality has high requirements of the working conditions. Newly upgraded cermet grade, hard and compact surface with good chemical stability and adhesion resistance. Also great wear resistance and chipping resistance, insert consistency, excellent machining surface quality.
Coated Cermet	HR115C	ISO P	Bronze	PVD	AlTiSiN+TiSiN	<ul style="list-style-type: none"> Better high temperature resistance suitable for higher cutting speed working condition compared to cermet grades. The coated cermet grade, with a new nano gradient composite structure coating, further improves the wear resistance, high temperature resistance, the unique transition layer treatment technology effectively improves the adhesion between the coating and the substrate, reduces the friction coefficient between the insert and workpiece. Insert services life and stability are outstanding

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A5

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A6

General turning inserts code key

Shape code			Chipbreaker and clamping form							
	A		B	Yes	N/A		N	N/A	N/A	
	D		E	Yes	Single-sided		R	N/A	Single-sided	
	K		M	Yes	N/A		F	N/A	Double-sided	
	V		W	Yes	N/A		M	Yes	Single-sided	
	S		T	Yes	Single-sided		G	Yes	Double-sided	
	W	Others	U	Yes	Double-sided		X	---	---	special
Shape code			Chipbreaker and clamping form							
Code	Hole	Chipbreaker	Insert section	Code	Hole	Chipbreaker	Insert section			

C N M G

Major clearance angle				Tolerance (mm)										
Code	Clearance angle	Code	Clearance angle											
A	3°	B	5°	◆ Tolerance requirements M-class (Distinguished by shape and inscribed circle size) ◆ Corner height (m) tolerance										
C	7°	D	15°	Class	Corner height (m)	Inscribed circle (ΦD)	Thickness (S)	Inscribed circle	Regular triangle	Square	80° rhombus	55° rhombus	35° rhombus	Circular
E	20°	F	25°	A	±0.005	±0.025	±0.025	6.35	±0.08	±0.08	±0.08	±0.11	±0.16	---
G	30°	N	0°	F	±0.005	±0.013	±0.025	9.525	±0.08	±0.08	±0.08	±0.11	±0.16	---
P	11°	O	Others	C	±0.013	±0.025	±0.025	12.7	±0.13	±0.13	±0.13	±0.15	---	---
				H	±0.013	±0.013	±0.025	15.875	±0.15	±0.15	±0.15	±0.18	---	---
				E	±0.025	±0.025	±0.025	19.05	±0.15	±0.15	±0.15	±0.18	---	---
				G	±0.025	±0.025	±0.13	25.4	---	±0.18	---	---	---	---
				J	±0.005	±0.05±0.13	±0.025	◆ Inscribed circle (ΦD) tolerance						
				K	±0.013	±0.05±0.13	±0.025	Inscribed circle	Regular triangle	Square	80° rhombus	55° rhombus	35° rhombus	Circular
				L	±0.025	±0.05±0.13	±0.025	6.35	±0.05	±0.05	±0.05	±0.05	±0.05	---
				M	±0.08±0.18	±0.05±0.13	±0.13	9.525	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
				N	±0.08±0.18	±0.05±0.13	±0.025	12.7	±0.08	±0.08	±0.08	±0.08	---	±0.08
				U	±0.13±0.38	±0.08±0.25	±0.13	15.875	±0.10	±0.10	±0.10	±0.10	---	±0.10
								19.05	±0.10	±0.10	±0.10	±0.10	---	±0.10
								25.4	---	±0.13	---	---	---	±0.13

Inscribed circle diameter (mm)	Cutting edge length								Insert thickness		
	C	D	R	S	T	V	W	K	Code	Thickness (mm)	
32.00										12	12.70
31.75										10	11.11
25.40									25	9.72	
25.00	25	25								09	9.52
20.00										07	7.94
19.05	19				19	19			33	T6	6.75
16.00		19			16					06	6.35
15.875	16				15	15			27	T5	5.95
12.70	12	15			12	12		22	22	08	5.56
12.00					12					T4	4.96
10.00					10					04	4.76
9.525	09	11			09	09		16	16	06	3.97
8.00					08					03	3.18
6.35	06	07						11	11	T2	2.58
6.00					06					02	2.38
5.56								09		T1	1.98
5.50					05					01	1.59
3.97								06		T0	0.99
										00	0.79

12 04 08 - GM (ISO)

4 3 2 (inch)

Inscribed circle		Thickness		Corner radius		Corner radius code		Chipbreaker code		
Code	Inscribed circle diameter (mm)	Code	Thickness (mm)	Code	Corner radius (mm)	Code	Corner radius (mm)	GF	GM	GR
2	6.35	2	3.18	0	0.2	00	No fillet			
3	9.525	3	4.76	1	0.4	02	0.2			
4	12.7	4	6.35	2	0.8	04	0.4			
5	15.875	5	7.94	3	1.2	08	0.8			
6	19.05	6	9.52	4	1.6	12	1.2			
8	25.4			5	2.0	16	1.6			
				6	2.4	20	2.0			
						24	2.4			
						32	3.2			
						X	Others			
						Insert diameter Mo (Metric) Round insert				

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A7

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A8

Overview of general turning inserts (Negative)

Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	80° C-type	55° D-type	90° S-type	60° T-type	35° V-type	80° W-type
For finishing	M	GF	<p>Recommended chipbreaker for finishing of P-type material</p> <ul style="list-style-type: none"> ◆ Extra-large positive rake angle, less cutting resistance. ◆ Positive cutting inclination angle can well control chip flow direction. ◆ The two-stage chip breaking table ensures good chip breaking even at small cutting depth. 								
		A19	A23	A26	A29	A32	A34				
		GC	<p>Recommended chipbreaker for finishing of P-type material</p> <ul style="list-style-type: none"> ◆ Better chip control performance, great machining surface quality ◆ Cutting edge with sharpness and strength. ◆ Especially suitable for wall lifting processing. 								
A23	A29	A32	A34								
For semi-finishing	M	BF	<p>Recommended chipbreaker for finishing of M-type material</p> <ul style="list-style-type: none"> ◆ Sharp cutting edge, less cutting resistance. ◆ Good chip disposal performance even at small cutting depth. 								
		A19	A23	A26	A29	A32	A34				
		GQ	<p>Semi-finishing of P-type material</p> <ul style="list-style-type: none"> ◆ It is suitable for finishing to semi-finishing of P-type material. ◆ Good chip removal performance with high versatility. 								
A19	A23	A26	A29	A32	A34						

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A9

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A10

Overview of general turning inserts (Negative)

Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	80° C-type	55° D-type	90° S-type	60° T-type	35° V-type	80° W-type
For semi-finishing	M	GM	<p>Recommended chipbreaker for semi-finishing of P-type material</p> <ul style="list-style-type: none"> Special edge design, ensuring both sharpness and strength. The curved front face with variable cutting edge width and rake angle ensures the smooth flow and good control of chips. With high versatility and wide cutting range, efficient and consistent machining is achieved. 								
		BM	<p>Recommended chipbreaker for semi-finishing of stainless steel</p> <ul style="list-style-type: none"> Sharp cutting edge, less cutting resistance, good chip disposal performance even at small cutting depth. The micro-passivated cutting edge reduces the formation of build-up edge. 								
		All-round	<p>General machining chipbreaker</p> <ul style="list-style-type: none"> Double-sided chipbreaker, especially suitable for K-type material machining. Recommended cutting parameters 								
		Flat	<p>Machining grooves for brittle materials and H-type materials</p> <ul style="list-style-type: none"> With high structural strength and good fit to the cutter bar, it is more suitable for unstable cutting of cast iron. 								
						A19	A24	A26	A29	A32	A34
						A19	A24	A26	A30	A33	A35
						A20	A24	A27	A30	A33	A35
						A20	A25	A27	A30	A33	A35

A

General turning

Turning of small components

Parting and grooving

Threading

Parting and grooving

Threading

Indexable milling

Indexable milling

Solid carbide end mill

Solid carbide end mill

Short hole drill

Short hole drill

Solid carbide drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

Parting and grooving

Threading

Indexable milling

Indexable milling

Solid carbide end mill

Solid carbide end mill

Short hole drill

Short hole drill

Solid carbide drill

Solid carbide drill

Overview of general turning inserts (Negative)

Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	80° C-type	55° D-type	90° S-type	60° T-type	35° V-type	80° W-type
For semi-finishing	M	SM	Semi-finish machining grooves for S-type material and titanium alloys <ul style="list-style-type: none"> Light and fast in cutting, the influence of work hardening and build-up edge on insert is effectively reduced. 								
For rough machining	M	GR	Recommended chipbreaker for roughing of P-type material <ul style="list-style-type: none"> Chipbreaking table with raised corner can effectively control the chip flow direction at small cutting depth; With a large rake angle and wide chamfer, both insert strength and sharpness are ensured; Double-sided groove is more cost-effective with good chip removal performance and enhanced versatility; It is suitable for roughing and semi-finishing of light-load cutting. 								
		BR	Recommended chipbreaker for roughing of M-type material <ul style="list-style-type: none"> Even edge passivation; Optimized chipbreaker convex plate; With firm cutting chamfer and land, it is capable of intermittent and heavy finishing; Large chip space enable it to achieve roughing and high feed finishing. 								
For heavy machining	M	GZ	Heavy machining chipbreaker for P-type material <ul style="list-style-type: none"> The unique chipbreaker convex plate design on the rake face reduces the chip contact area at large cutting depth and provides excellent chip control. The sharp cutting edge can effectively reduce the cutting force. 								
		GX	Heavy machining chipbreaker for P-type material <ul style="list-style-type: none"> The variable chamfer design and special chipbreaker provide excellent chip control. The strong cutting edge can bear great impact. 								

A

General turning

Turning of small components

Parting and grooving

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

Overview of general turning inserts (Postive)

Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	80° C-type	55° D-type	90° S-type	60° T-type	35° V-type	80° W-type
For finishing	M	TF	<p>General chipbreaker for finishing</p> <ul style="list-style-type: none"> Inclined cutting edge design ensures low cutting force, effectively reduce vibration, and ensure the machining surface quality Strong versatility and wide processing range. Inclination and chip control convex plate design can achieve excellent chip control performance. 								
For semi-finishing	M	TM	<p>General chipbreaker for semi-finishing</p> <ul style="list-style-type: none"> It's suitable for internal or external semi-finishing of steel, stainless steel and cast iron 								
Aluminum alloy machining	G	AK	<p>Aluminum alloy machining chipbreaker</p> <ul style="list-style-type: none"> With a large rake angle and clearance angle, the cutting edge of the insert becomes sharper and therefore, cutting can be done in a faster and lighter pattern with effective chip breaking. 								

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Overview of general turning inserts(Special type)

Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	R shape
Profiling insert	M	All-round chipbreaker	<ul style="list-style-type: none"> With high strength, the cutting edge secures high safety and is the first choice for rough profiling. It is suitable for train wheel turning. 			<p>A43</p>
		MR	<ul style="list-style-type: none"> Large chip-breaking space prevents chip blockage during large cutting depth machining. The small pit group improves the chip machining performance during small cutting depth machining. It is suitable for train wheel turning. 			<p>A43</p>
Usage	Tolerance	Chipbreaker	90° S-type	Chipbreaker	90° S-type	
Planer milling machining	M	HAF	<p>A44</p>	HSF	<p>A44</p>	

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

80° CN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	●	●	■	■	●	●	■	■	●	●
P Steel	●	●	■	■	●	●	■	■	●	●
M Stainless steel					●	●	■	■	●	●
K Cast iron					●	●	■	■	●	●
N Non-ferrous metal									●	●
S Heat resistant super alloys Titanium alloy					●	●				


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet
			LE	IC	S	DI	RE	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135	HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C				
Finishing		CNMG120404-GF	12.9	12.7	4.76	5.16	0.4	☆	★	☆	☆		
		CNMG120408-GF	12.9	12.7	4.76	5.16	0.8	☆	★	☆	☆		
Finishing		CNMG120404-BF	12.9	12.7	4.76	5.16	0.4				☆	★	
		CNMG120408-BF	12.9	12.7	4.76	5.16	0.8				☆	★	
Semi-finishing		CNMG120408-GQ	12.9	12.7	4.76	5.16	0.8	☆	★	☆	☆		
		CNMG120412-GQ	12.9	12.7	4.76	5.16	1.2	☆	★	☆	☆		
Semi-finishing		CNMG120404-GM	12.9	12.7	4.76	5.16	0.4	☆	★	☆	☆		
		CNMG120408-GM	12.9	12.7	4.76	5.16	0.8	☆	★	☆	☆		
		CNMG120412-GM	12.9	12.7	4.76	5.16	1.2	☆	★	☆	☆		
		CNMG160608-GM	16.1	15.875	6.35	6.35	0.8	☆	★	☆	☆		
		CNMG160612-GM	16.1	15.875	6.35	6.35	1.2	☆	★	☆	☆		
		CNMG160616-GM	16.1	15.875	6.35	6.35	1.6	☆	★	☆	☆		
		CNMG190608-GM	19.3	19.05	6.35	7.94	0.8	☆	★	☆	☆		
		CNMG190612-GM	19.3	19.05	6.35	7.94	1.2	☆	★	☆	☆		
Semi-finishing		CNMG120404-BM	12.9	12.7	4.76	5.16	0.4				☆	★	
		CNMG120408-BM	12.9	12.7	4.76	5.16	0.8				☆	★	
		CNMG120412-BM	12.9	12.7	4.76	5.16	1.2				☆	★	

★ Recommended grade ☆ Available grade

Applicable tools



80° CN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	●	●	■	■	●	●	■	■	●	●
P Steel	●	●	■	■	●	●	■	■	●	●
M Stainless steel					●	●	■	■	●	●
K Cast iron					●	●	■	■	●	●
N Non-ferrous metal									●	●
S Heat resistant super alloys Titanium alloy					●	●				

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet
			LE	IC	S	DI	RE	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135	HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C				
Cast iron machining		CNMG120404	12.9	12.7	4.76	5.16	0.4				★		
		CNMG120408	12.9	12.7	4.76	5.16	0.8				★		
		CNMG120412	12.9	12.7	4.76	5.16	1.2				★		
		CNMG120416	12.9	12.7	4.76	5.16	1.6				★		
		CNMG160608	16.1	15.875	6.35	6.35	0.8				★		
		CNMG160612	16.1	15.875	6.35	6.35	1.2				★		
		CNMG160616	16.1	15.875	6.35	6.35	1.6				★		
		CNMG190612	19.3	19.05	6.35	7.94	1.2				★		
Cast iron machining		CNMG190616	19.3	19.05	6.35	7.94	1.6				★		
		CNMA120404	12.9	12.7	4.76	5.16	0.4				★		
		CNMA120408	12.9	12.7	4.76	5.16	0.8				★		
		CNMA120412	12.9	12.7	4.76	5.16	1.2				★		
		CNMA120416	12.9	12.7	4.76	5.16	1.6				★		
		CNMA160608	16.1	15.875	6.35	6.35	0.8				★		
		CNMA160612	16.1	15.875	6.35	6.35	1.2				★		
		CNMA160616	16.1	15.875	6.35	6.35	1.6				★		
CNMA190612	19.3	19.05	6.35	7.94	1.2				★				
CNMA190616	19.3	19.05	6.35	7.94	1.6				★				

★ Recommended grade ☆ Available grade

Applicable tools



A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

80° CN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P Steel	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
M Stainless steel	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
K Cast iron	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
N Non-ferrous metal	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
S Heat resistant super alloys Titanium alloy	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Semi-finishing		CNMG120404-SM	12.9	12.7	4.76	5.16	0.4				☆ ★														
		CNMG120408-SM	12.9	12.7	4.76	5.16	0.8				☆ ★														
		CNMG120412-SM	12.9	12.7	4.76	5.16	1.2				☆ ★														
Roughing		CNMG120408-GR	12.9	12.7	4.76	5.16	0.8	★ ☆ ★ ☆																	
		CNMG120412-GR	12.9	12.7	4.76	5.16	1.2	★ ☆ ★ ☆																	
		CNMG190608-GR	19.3	19.05	6.35	7.94	0.8	★ ☆ ★ ☆																	
		CNMG190612-GR	19.3	19.05	6.35	7.94	1.2	★ ☆ ★ ☆																	
		CNMG190616-GR	19.3	19.05	6.35	7.94	1.6	★ ☆ ★ ☆																	
Roughing		CNMG120408-BR	12.9	12.7	4.76	5.16	0.8				☆ ★														
		CNMG120412-BR	12.9	12.7	4.76	5.16	1.2				☆ ★														
		CNMG190612-BR	19.3	19.05	6.35	7.94	1.2				☆ ★														
		CNMG190616-BR	19.3	19.05	6.35	7.94	1.6				☆ ★														
Heavy machining		CNMM160616-GZ	16.1	15.875	6.35	6.35	1.6	★ ★																	
		CNMM190608-GZ	19.3	19.05	6.35	7.94	0.8	★ ★																	
		CNMM190612-GZ	19.3	19.05	6.35	7.94	1.2	★ ★																	
		CNMM190616-GZ	19.3	19.05	6.35	7.94	1.6	★ ★																	
		CNMM190624-GZ	19.3	19.05	6.35	7.94	2.4	★ ★																	
		CNMM250924-GZ	25.792	25.4	9.525	9.12	2.4	★ ★																	
CNMM250932-GZ	25.792	25.4	9.525	9.12	3.2	★ ★																			

★ Recommended grade ☆ Available grade

Applicable tools



80° CN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P Steel	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
M Stainless steel	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
K Cast iron	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
N Non-ferrous metal	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
S Heat resistant super alloys Titanium alloy	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Heavy machining		CNMM190608-GX	19.3	19.05	6.35	7.94	0.8	★ ★																	
		CNMM190612-GX	19.3	19.05	6.35	7.94	1.2	★ ★																	
		CNMM190616-GX	19.3	19.05	6.35	7.94	1.6	★ ★																	
		CNMM190624-GX	19.3	19.05	6.35	7.94	2.4	★ ★																	
		CNMM250716-GX	25.792	25.4	7.94	9.12	1.6	★ ★																	
		CNMM250724-GX	25.792	25.4	7.94	9.12	2.4	★ ★																	
		CNMM250732-GX	25.792	25.4	7.94	9.12	3.2	★ ★																	
		CNMM250916-GX	25.792	25.4	9.525	9.12	1.6	★ ★																	
		CNMM250924-GX	25.792	25.4	9.525	9.12	2.4	★ ★																	
		CNMM250932-GX	25.792	25.4	9.525	9.12	3.2	★ ★																	

★ Recommended grade ☆ Available grade

Applicable tools



A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Turning / General turning

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

55° DN □ □

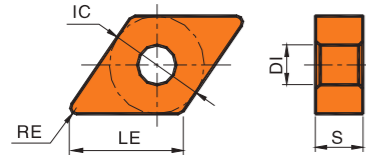

Working condition: ● Stable ● Average □ Tough

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
P Steel	● ● ● □ □ □				
M Stainless steel		● ● ● □ □ □			
K Cast iron			● ● ● □ □ □		
N Non-ferrous metal				● ● ● □ □ □	
S Heat resistant super alloys Titanium alloy					● ● ● □ □ □


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C				
Finishing		DNMG150404-GC	15.5	12.7	4.76	5.16	0.4	★	★	★	★														
		DNMG150408-GC	15.5	12.7	4.76	5.16	0.8	★	★	★	★														
Finishing		DNMG150404-GF	15.5	12.7	4.76	5.16	0.4	★	★	★	★														
		DNMG150408-GF	15.5	12.7	4.76	5.16	0.8	★	★	★	★														
		DNMG150604-GF	15.5	12.7	6.35	5.16	0.4	★	★	★	★														
		DNMG150608-GF	15.5	12.7	6.35	5.16	0.8	★	★	★	★														
Finishing		DNMG150404-BF	15.5	12.7	4.76	5.16	0.4							☆	★										
		DNMG150408-BF	15.5	12.7	4.76	5.16	0.8								☆	★									
		DNMG150604-BF	15.5	12.7	6.35	5.16	0.4								☆	★									
		DNMG150608-BF	15.5	12.7	6.35	5.16	0.8								☆	★									
Semi-finishing		DNMG150408-GQ	15.5	12.7	4.76	5.16	0.8	★	★	★	★														
		DNMG150412-GQ	15.5	12.7	4.76	5.16	1.2	★	★	★	★														
		DNMG150608-GQ	15.5	12.7	6.35	5.16	0.8	★	★	★	★														
		DNMG150612-GQ	15.5	12.7	6.35	5.16	1.2	★	★	★	★														

★ Recommended grade ☆ Available grade

Applicable tools



55° DN □ □

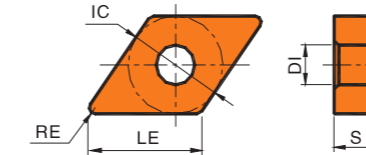

Working condition: ● Stable ● Average □ Tough

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
P Steel	● ● ● □ □ □				
M Stainless steel		● ● ● □ □ □			
K Cast iron			● ● ● □ □ □		
N Non-ferrous metal				● ● ● □ □ □	
S Heat resistant super alloys Titanium alloy					● ● ● □ □ □

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Semi-finishing		DNMG110412-GM	11.6	9.525	4.76	3.81	1.2	★	★	★	★	★													
		DNMG150404-GM	15.5	12.7	4.76	5.16	0.4	★	★	★	★	★													
		DNMG150408-GM	15.5	12.7	4.76	5.16	0.8	★	★	★	★	★													
		DNMG150412-GM	15.5	12.7	4.76	5.16	1.2	★	★	★	★	★													
		DNMG150604-GM	15.5	12.7	6.35	5.16	0.4	★	★	★	★	★													
		DNMG150608-GM	15.5	12.7	6.35	5.16	0.8	★	★	★	★	★													
Semi-finishing		DNMG150404-BM	15.5	12.7	4.76	5.16	0.4										☆	★							
		DNMG150408-BM	15.5	12.7	4.76	5.16	0.8											☆	★						
		DNMG150412-BM	15.5	12.7	4.76	5.16	1.2												☆	★					
		DNMG150604-BM	15.5	12.7	6.35	5.16	0.4												☆	★					
		DNMG150608-BM	15.5	12.7	6.35	5.16	0.8												☆	★					
Cast iron machining		DNMG150404	15.5	12.7	4.76	5.16	0.4																		
		DNMG150408	15.5	12.7	4.76	5.16	0.8																		
		DNMG150604	15.5	12.7	6.35	5.16	0.4																		
		DNMG150608	15.5	12.7	6.35	5.16	0.8																		
		DNMG150612	15.5	12.7	6.35	5.16	1.2																		

★ Recommended grade ☆ Available grade

Applicable tools



A

General turning

Turning of small components

Parting and grooving

Threading


Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

55°DN

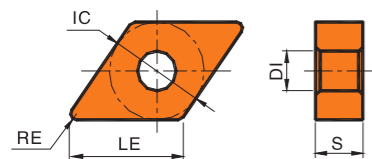

Working condition: ● Stable ● Average ■ Tough

Workpiece material	●	●	■	■	●	●	■	■
P Steel	●	●	■	■	●	●	■	■
M Stainless steel					●	●	■	■
K Cast iron					●	●	■	■
N Non-ferrous metal								
S Heat resistant super alloys Titanium alloy					●	●		


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet													
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Cast iron machining		DNMA150404	15.5	12.7	4.76	5.16	0.4				★															
		DNMA150408	15.5	12.7	4.76	5.16	0.8				★															
		DNMA150412	15.5	12.7	4.76	5.16	1.2				★															
		DNMA150604	15.5	12.7	6.35	5.16	0.4				★															
		DNMA150608	15.5	12.7	6.35	5.16	0.8				★															
Semi-finishing		DNMG150404-SM	15.5	12.7	4.76	5.16	0.4						☆	☆												
		DNMG150408-SM	15.5	12.7	4.76	5.16	0.8						☆	☆												
		DNMG150412-SM	15.5	12.7	4.76	5.16	1.2						☆	☆												
		DNMG150604-SM	15.5	12.7	6.35	5.16	0.4						☆	☆												
		DNMG150608-SM	15.5	12.7	6.35	5.16	0.8						☆	☆												
Roughing		DNMG150608-GR	15.5	12.7	6.35	5.16	0.8	★	☆	☆	☆															
		DNMG150612-GR	15.5	12.7	6.35	5.16	1.2	★	☆	☆	☆															

★ Recommended grade ☆ Available grade

Applicable tools



90°SN

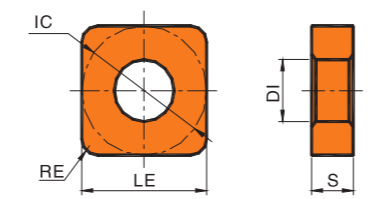

Working condition: ● Stable ● Average ■ Tough

Workpiece material	●	●	■	■	●	●	■	■
P Steel	●	●	■	■	●	●	■	■
M Stainless steel					●	●	■	■
K Cast iron					●	●	■	■
N Non-ferrous metal								
S Heat resistant super alloys Titanium alloy					●	●		

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet													
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Finishing		SNMG120404-GF	12.7	12.7	4.76	5.16	0.4	☆	★	☆	★	☆														
		SNMG120408-GF	12.7	12.7	4.76	5.16	0.8	☆	★	☆	★	☆														
Finishing		SNMG120404-BF	12.7	12.7	4.76	5.16	0.4											☆	★							
		SNMG120408-BF	12.7	12.7	4.76	5.16	0.8												☆	★						
Semi-finishing		SNMG120412-GQ	12.7	12.7	4.76	5.16	1.2	☆	★	☆	★	☆														
Semi-finishing		SNMG120404-GM	12.7	12.7	4.76	5.16	0.4	☆	★	☆	★	☆														
		SNMG120408-GM	12.7	12.7	4.76	5.16	0.8	☆	★	☆	★	☆														
		SNMG120412-GM	12.7	12.7	4.76	5.16	1.2	☆	★	☆	★	☆														
		SNMG190612-GM	19.05	19.05	6.35	7.94	1.2	☆	★	☆	★	☆														
Semi-finishing		SNMG190616-GM	19.05	19.05	6.35	7.94	1.6	☆	★	☆	★	☆														
		SNMG120404-BM	12.7	12.7	4.76	5.16	0.4												☆	★						
		SNMG120408-BM	12.7	12.7	4.76	5.16	0.8													☆	★					
Semi-finishing		SNMG120412-BM	12.7	12.7	4.76	5.16	1.2													☆	★					

★ Recommended grade ☆ Available grade

Applicable tools



A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

60°TN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	●	●	■	■	●	●	■	■
P Steel	●	●	■	■	●	●	■	■
M Stainless steel					●	●	■	■
K Cast iron					●	●	■	■
N Non-ferrous metal								
S Heat resistant super alloys Titanium alloy					●	●		


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet													
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C			
Finishing		TNMG160404-GC	16.5	9.525	4.76	3.81	0.4	☆	★	☆	★															
		TNMG160408-GC	16.5	9.525	4.76	3.81	0.8	☆	★	☆	★															
Finishing		TNMG160404-GF	16.5	9.525	4.76	3.81	0.4	☆	★	☆	★															
		TNMG160408-GF	16.5	9.525	4.76	3.81	0.8	☆	★	☆	★															
Finishing		TNMG160404-BF	16.5	9.525	4.76	3.81	0.4																			
		TNMG160408-BF	16.5	9.525	4.76	3.81	0.8																			
Semi-finishing		TNMG160404-GQ	16.5	9.525	4.76	3.81	0.4	☆	★	☆	★															
		TNMG160408-GQ	16.5	9.525	4.76	3.81	0.8	☆	★	☆	★															
Semi-finishing		TNMG160412-GQ	16.5	9.525	4.76	3.81	1.2	☆	★	☆	★															
		TNMG220412-GM	22	12.7	4.76	5.16	1.2	☆	★	☆	★															

★ Recommended grade ☆ Available grade

Applicable tools



60°TN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	●	●	■	■	●	●	■	■
P Steel	●	●	■	■	●	●	■	■
M Stainless steel					●	●	■	■
K Cast iron					●	●	■	■
N Non-ferrous metal								
S Heat resistant super alloys Titanium alloy					●	●		

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet														
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C				
Semi-finishing		TNMG160404-BM	16.5	9.525	4.76	3.81	0.4																				
		TNMG160408-BM	16.5	9.525	4.76	3.81	0.8																				
		TNMG160412-BM	16.5	9.525	4.76	3.81	1.2																				
Cast iron machining		TNMG160404	16.5	9.525	4.76	3.81	0.4																				
		TNMG160408	16.5	9.525	4.76	3.81	0.8																				
		TNMG160212	16.5	9.525	4.76	3.81	1.2																				
		TNMG220408	22	12.7	4.76	5.16	0.8																				
		TNMG220412	22	12.7	4.76	5.16	1.2																				
Roughing		TNMA160404	16.5	9.525	4.76	3.81	0.4																				
		TNMA160408	16.5	9.525	4.76	3.81	0.8																				
		TNMA160412	16.5	9.525	4.76	3.81	1.2																				
		TNMA220412	22	12.7	4.76	5.16	1.2																				
		TNMA220416	22	12.7	4.76	5.16	1.6																				

★ Recommended grade ☆ Available grade

Applicable tools



A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

60°TN □ □

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C	
			Roughing		TNMG160408-GR	16.5	9.525	4.76	3.81	0.8	★	☆	★	☆											
		TNMG160412-GR	16.5	9.525	4.76	3.81	1.2	★	☆	★	☆														
Roughing		TNMG160408-BR	16.5	9.525	4.76	3.81	0.8											☆	★						
		TNMG160412-BR	16.5	9.525	4.76	3.81	1.2											☆	★						

★ Recommended grade ☆ Available grade

Applicable tools



A31

35°VN □ □

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C	
			Finishing		VNMG160404-GC	16.6	9.525	4.76	3.81	0.4	☆	★	☆	★	☆										
		VNMG160408-GC	16.6	9.525	4.76	3.81	0.8	☆	★	☆	★	☆													
Finishing		VNMG160404-GF	16.6	9.525	4.76	3.81	0.4	☆	★	☆	★	☆													
		VNMG160408-GF	16.6	9.525	4.76	3.81	0.8	☆	★	☆	★	☆													
Finishing		VNMG160404-BF	16.6	9.525	4.76	3.81	0.4											☆	★						
		VNMG160408-BF	16.6	9.525	4.76	3.81	0.8											☆	★						
Semi-finishing		VNMG160404-GQ	16.6	9.525	4.76	3.81	0.4	☆	★	☆	★	☆													
		VNMG160408-GQ	16.6	9.525	4.76	3.81	0.8	☆	★	☆	★	☆													
		VNMG160412-GQ	16.6	9.525	4.76	3.81	1.2	☆	★	☆	★	☆													
Semi-finishing		VNMG160404-GM	16.6	9.525	4.76	3.81	0.4	☆	★	☆	★	☆													
		VNMG160408-GM	16.6	9.525	4.76	3.81	0.8	☆	★	☆	★	☆													
		VNMG160412-GM	16.6	9.525	4.76	3.81	1.2	☆	★	☆	★	☆													

★ Recommended grade ☆ Available grade

Applicable tools


A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

A32

A General turning
 Turning of small components
 Parting and grooving
 Threading
B Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

35°VN □ □

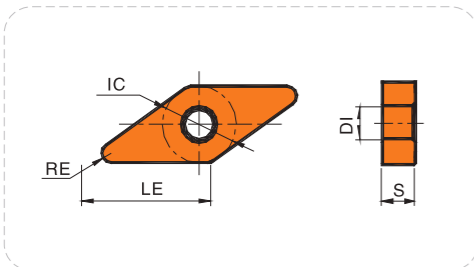

Working condition: ● Stable ● Average ▣ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ● ●	● ● ● ●	● ● ● ●
M Stainless steel	● ● ● ●	● ● ● ●	● ● ● ●
K Cast iron	● ● ● ●	● ● ● ●	● ● ● ●
N Non-ferrous metal	● ● ● ●	● ● ● ●	● ● ● ●
S Heat resistant super alloys Titanium alloy	● ● ● ●	● ● ● ●	● ● ● ●


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C	
Semi-finishing		VNMG160404-BM	16.6	9.525	4.76	3.81	0.4				☆ ★														
		VNMG160408-BM	16.6	9.525	4.76	3.81	0.8				☆ ★														
		VNMG160412-BM	16.6	9.525	4.76	3.81	1.2				☆ ★														
Cast iron machining		VNMG160404	16.6	9.525	4.76	3.81	0.4				★														
		VNMG160408	16.6	9.525	4.76	3.81	0.8				★														
Cast iron machining		VNMA160404	16.6	9.525	4.76	3.81	0.4				★														
		VNMA160408	16.6	9.525	4.76	3.81	0.8				★														
Semi-finishing		VNMG160404-SM	16.6	9.525	4.76	3.81	0.4				☆ ★														
		VNMG160408-SM	16.6	9.525	4.76	3.81	0.8				☆ ★														

★ Recommended grade ☆ Available grade

Applicable tools



80°WN □ □

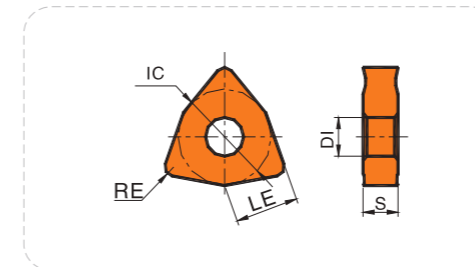

Working condition: ● Stable ● Average ▣ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ● ●	● ● ● ●	● ● ● ●
M Stainless steel	● ● ● ●	● ● ● ●	● ● ● ●
K Cast iron	● ● ● ●	● ● ● ●	● ● ● ●
N Non-ferrous metal	● ● ● ●	● ● ● ●	● ● ● ●
S Heat resistant super alloys Titanium alloy	● ● ● ●	● ● ● ●	● ● ● ●


Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet													
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C		
Finishing		WNMG080404-GC	8.7	12.7	4.76	5.16	0.4	☆ ★ ☆ ★ ☆																		
		WNMG080408-GC	8.7	12.7	4.76	5.16	0.8	☆ ★ ☆ ★ ☆																		
Finishing		WNMG080404-GF	8.7	12.7	4.76	5.16	0.4	☆ ★ ☆ ★ ☆																		
		WNMG080408-GF	8.7	12.7	4.76	5.16	0.8	☆ ★ ☆ ★ ☆																		
Finishing		WNMG080402-BF	8.7	12.7	4.76	5.16	0.2					☆ ★														
		WNMG080404-BF	8.7	12.7	4.76	5.16	0.4					☆ ★														
		WNMG080408-BF	8.7	12.7	4.76	5.16	0.8					☆ ★														
Semi-finishing		WNMG080404-GQ	8.7	12.7	4.76	5.16	0.4	☆ ★ ☆ ★ ☆																		
		WNMG080408-GQ	8.7	12.7	4.76	5.16	0.8	☆ ★ ☆ ★ ☆																		
		WNMG080412-GQ	8.7	12.7	4.76	5.16	1.2	☆ ★ ☆ ★ ☆																		
Semi-finishing		WNMG080404-GM	8.7	12.7	4.76	5.16	0.4	☆ ★ ☆ ★ ☆																		
		WNMG080408-GM	8.7	12.7	4.76	5.16	0.8	☆ ★ ☆ ★ ☆																		
		WNMG080412-GM	8.7	12.7	4.76	5.16	1.2	☆ ★ ☆ ★ ☆																		

★ Recommended grade ☆ Available grade

Applicable tools



80°WN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
M Stainless steel		● ● ● ■ ■	
K Cast iron		● ● ● ■ ■	
N Non-ferrous metal			● ● ● ■ ■
S Heat resistant super alloys Titanium alloy		● ● ● ■ ■	

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet														
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C				
Semi-finishing		WNMG06T312-BM	6.6	9.525	3.97	3.81	1.2				☆ ★																
		WNMG060412-BM	6.6	9.525	4.76	3.81	1.2				☆ ★																
		WNMG080404-BM	8.7	12.7	4.76	5.16	0.4				☆ ★																
		WNMG080408-BM	8.7	12.7	4.76	5.16	0.8				☆ ★																
		WNMG080412-BM	8.7	12.7	4.76	5.16	1.2				☆ ★																
Cast iron machining		WNMG080404	8.7	12.7	4.76	5.16	0.4				★																
		WNMG080408	8.7	12.7	4.76	5.16	0.8				★																
		WNMG080412	8.7	12.7	4.76	5.16	1.2				★																
Cast iron machining		WNMA060404	6.6	9.525	4.76	3.81	0.4				★																
		WNMA060408	6.6	9.525	4.76	3.81	0.8				★																
		WNMA080404	8.7	12.7	4.76	5.16	0.4				★																
		WNMA080408	8.7	12.7	4.76	5.16	0.8				★																
		WNMA080412	8.7	12.7	4.76	5.16	1.2				★																
WNMA080416	8.7	12.7	4.76	5.16	1.6				★																		

★ Recommended grade ☆ Available grade

Applicable tools




PWLNR/L



MWLNR/L

80°WN □ □



Working condition: ● Stable ● Average ■ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ● ■ ■	● ● ● ■ ■	● ● ● ■ ■
M Stainless steel		● ● ● ■ ■	
K Cast iron		● ● ● ■ ■	
N Non-ferrous metal			● ● ● ■ ■
S Heat resistant super alloys Titanium alloy		● ● ● ■ ■	

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C		
Semi-finishing		WNMG080404-SM	8.7	12.7	4.76	5.16	0.4				☆ ★														
		WNMG080408-SM	8.7	12.7	4.76	5.16	0.8				☆ ★														
		WNMG080412-SM	8.7	12.7	4.76	5.16	1.2				☆ ★														
Roughing		WNMG080408-GR	8.7	12.7	4.76	5.16	0.8				★ ☆ ★ ☆														
		WNMG080412-GR	8.7	12.7	4.76	5.16	1.2				★ ☆ ★ ☆														
Roughing		WNMG080408-BR	8.7	12.7	4.76	5.16	0.8					☆ ★													
		WNMG080412-BR	8.7	12.7	4.76	5.16	1.2				☆ ★														

★ Recommended grade ☆ Available grade

Applicable tools




PWLNR/L



MWLNR/L

80°C□□

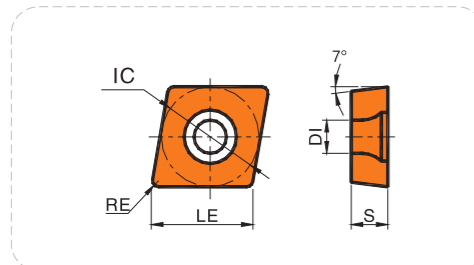


Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel (P)	Stainless steel (M)	Cast iron (K)	Non-ferrous metal (N)	Heat resistant super alloys Titanium alloy (S)
	● ● ● ● ● ■ ● ● ●	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●


Processing	Insert shape	Type	Dimension (mm)					Material																			
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Finishing		CCGT060202-AK	6.4	6.35	2.38	2.8	0.2																			★ ☆	
		CCGT060204-AK	6.4	6.35	2.38	2.8	0.4																			★ ☆	
		CCGT09T302-AK	9.7	9.525	3.97	4.4	0.2																				★ ☆
		CCGT09T304-AK	9.7	9.525	3.97	4.4	0.4																				★ ☆
		CCGT09T308-AK	9.7	9.525	3.97	4.4	0.8																				★ ☆
		CCGT120404-AK	12.9	12.7	4.76	5.56	0.4																				★ ☆
Finishing		CCMT060204-TF	6.4	6.35	2.38	2.8	0.4	★ ☆ ★										☆ ★									
		CCMT060208-TF	6.4	6.35	2.38	2.8	0.8	★ ☆ ★										☆ ★									
		CCMT09T304-TF	9.7	9.525	3.97	4.4	0.4	★ ☆ ★										☆ ★									
		CCMT09T308-TF	9.7	9.525	3.97	4.4	0.8	★ ☆ ★										☆ ★									
		CCMT060204-TM	6.4	6.35	2.38	2.8	0.4	★ ☆ ★										☆ ★									
		CCMT060208-TM	6.4	6.35	2.38	2.8	0.8	★ ☆ ★										☆ ★									
Semi-finishing		CCMT09T304-TM	9.7	9.525	3.97	4.4	0.4	★ ☆ ★									☆ ★										
		CCMT09T308-TM	9.7	9.525	3.97	4.4	0.8	★ ☆ ★									☆ ★										
		CCMT120404-TM	12.9	12.7	4.76	5.56	0.4	★ ☆ ★									☆ ★										
		CCMT120408-TM	12.9	12.7	4.76	5.56	0.8	★ ☆ ★									☆ ★										
		CCMT120412-TM	12.9	12.7	4.76	5.56	1.2	★ ☆ ★									☆ ★										

★ Recommended grade ☆ Available grade

Applicable tools



55°DC□□

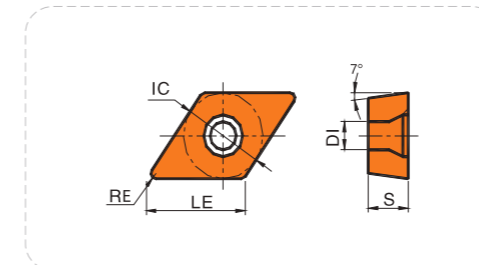

Working condition: ● Stable ● Average ■ Tough


Workpiece material	Steel (P)	Stainless steel (M)	Cast iron (K)	Non-ferrous metal (N)	Heat resistant super alloys Titanium alloy (S)
	● ● ● ● ● ■ ● ● ●	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●

Processing	Insert shape	Type	Dimension (mm)					Material																		
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Finishing		DCGT070202-AK	7.8	6.35	2.38	2.8	0.2																			★ ☆
		DCGT070204-AK	7.8	6.35	2.38	2.8	0.4																			★ ☆
		DCGT11T302-AK	11.6	9.525	3.97	4.4	0.2																			★ ☆
		DCGT11T304-AK	11.6	9.525	3.97	4.4	0.4																			★ ☆
		DCGT11T308-AK	11.6	9.525	3.97	4.4	0.8																			★ ☆
Finishing		DCMT11T304-TF	11.6	9.525	3.97	4.4	0.4	★ ☆ ★									☆ ★									
		DCMT11T308-TF	11.6	9.525	3.97	4.4	0.8	★ ☆ ★									☆ ★									
Semi-finishing		DCMT070204-TM	7.8	6.35	2.38	2.8	0.4	★ ☆ ★									☆ ★									
		DCMT070208-TM	7.8	6.35	2.38	2.8	0.8	★ ☆ ★									☆ ★									
		DCMT11T304-TM	11.6	9.525	3.97	4.4	0.4	★ ☆ ★									☆ ★									
		DCMT11T312-TM	11.6	9.525	3.97	4.4	1.2	★ ☆ ★									☆ ★									

★ Recommended grade ☆ Available grade

Applicable tools

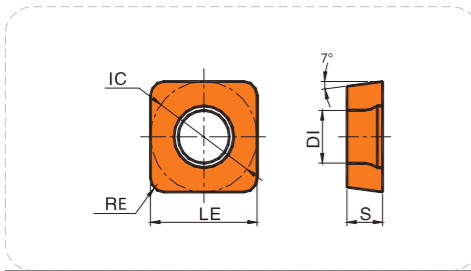

90°SC


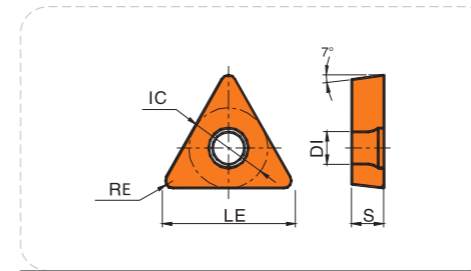
P Steel	● ● ● # # #
M Stainless steel	
K Cast iron	● ● ● ● ● ● ● ● ● ●
N Non-ferrous metal	
S Heat resistant super alloys Titanium alloy	● ●

Working condition: ● Stable ● Average # Tough

Processing	Insert shape	Type	Dimension (mm)					CVD	PVD	Cemented carbide	Cermets
			LE	IC	S	DI	RE				
Finishing		SCMT120408-TF	12.7	12.7	4.76	5.56	0.8	★ ☆ ★	☆ ★		
Semi-finishing		SCMT09T304-TM	9.525	9.525	3.97	4.4	0.4	★ ☆ ★	☆ ★		
		SCMT09T308-TM	9.525	9.525	3.97	4.4	0.8	★ ☆ ★	☆ ★		
		SCMT120404-TM	12.7	12.7	4.76	5.56	0.4	★ ☆ ★	☆ ★		
		SCMT120408-TM	12.7	12.7	4.76	5.56	0.8	★ ☆ ★	☆ ★		
		SCMT120412-TM	12.7	12.7	4.76	5.56	1.2	★ ☆ ★	☆ ★		

★ Recommended grade ☆ Available grade

Applicable tools

60°TC


P Steel	● ● ● # # #
M Stainless steel	
K Cast iron	● ● ● ● ● ● ● ● ● ●
N Non-ferrous metal	
S Heat resistant super alloys Titanium alloy	● ●

Working condition: ● Stable ● Average # Tough


Processing	Insert shape	Type	Dimension (mm)					CVD	PVD	Cemented carbide	Cermets
			LE	IC	S	DI	RE				
Finishing		TCGT090204-AK	9.7	5.56	2.38	2.8	0.4			★ ☆	
		TCGT110204-AK	11.0	6.35	2.38	2.8	0.4			★ ☆	
		TCGT16T304-AK	16.5	9.525	3.97	4.4	0.4			★ ☆	
Finishing		TCMT110204-TF	11.0	6.35	2.38	2.8	0.4	★ ☆ ★	☆ ★		
Semi-finishing		TCMT110204-TM	11.0	6.35	2.38	2.8	0.4	★ ☆ ★	☆ ★		
		TCMT110208-TM	11.0	6.35	2.38	2.8	0.8	★ ☆ ★	☆ ★		
		TCMT16T304-TM	16.5	9.525	3.97	4.4	0.4	★ ☆ ★	☆ ★		
		TCMT16T308-TM	16.5	9.525	3.97	4.4	0.8	★ ☆ ★	☆ ★		
		TCMT16T312-TM	16.5	9.525	3.97	4.4	1.2	★ ☆ ★	☆ ★		

★ Recommended grade ☆ Available grade

Applicable tools


A

35°VB□□

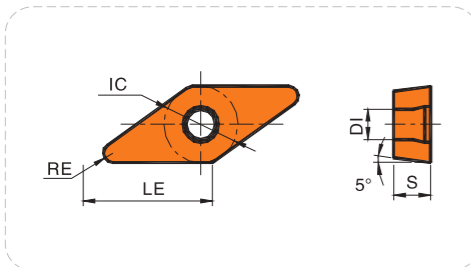


Working condition: ● Stable ● Average ☐ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●
M Stainless steel			● ● ● ● ●
K Cast iron			● ● ● ● ●
N Non-ferrous metal			
S Heat resistant super alloys Titanium alloy			● ● ● ● ●

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Finishing		VBGT160402-AK	16.5	9.525	4.76	4.4	0.2													★	☆			
		VBGT160404-AK	16.5	9.525	4.76	4.4	0.4														★	☆		
		VBGT160408-AK	16.5	9.525	4.76	4.4	0.8														★	☆		
Finishing		VBMT160404-TF	16.5	9.525	4.76	4.4	0.4	★	☆	★			☆	★										
		VBMT160408-TF	16.5	9.525	4.76	4.4	0.8	★	☆	★			☆	★										
Semi-finishing		VBMT110304-TM	11.0	6.35	3.18	2.8	0.4	★	☆	★			☆	★										
		VBMT110308-TM	11.0	6.35	3.18	2.8	0.8	★	☆	★			☆	★										
		VBMT160404-TM	16.5	9.525	4.76	4.4	0.4	★	☆	★			☆	★										
		VBMT160408-TM	16.5	9.525	4.76	4.4	0.8	★	☆	★			☆	★										
		VBMT160412-TM	16.5	9.525	4.76	4.4	1.2	★	☆	★			☆	★										


★ Recommended grade ☆ Available grade

Applicable tools



A

35°VC□□

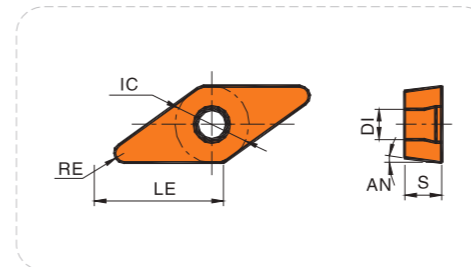



Working condition: ● Stable ● Average ☐ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●
M Stainless steel			● ● ● ● ●
K Cast iron			● ● ● ● ●
N Non-ferrous metal			
S Heat resistant super alloys Titanium alloy			● ● ● ● ●

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet												
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Semi-finishing		VCGT110302-AK	11.0	6.35	3.18	2.8	0.2														★	☆			
		VCGT110304-AK	11.0	6.35	3.18	2.8	0.4															★	☆		
		VCGT160402-AK	16.5	9.525	4.76	4.4	0.2															★	☆		
		VCGT160404-AK	16.5	9.525	4.76	4.4	0.4															★	☆		
		VCGT160408-AK	16.5	9.525	4.76	4.4	0.8															★	☆		
Semi-finishing		VCMT110304-TM	11.0	6.35	3.18	2.8	0.4	★	☆	★			☆	★											
		VCMT110308-TM	11.0	6.35	3.18	2.8	0.8	★	☆	★			☆	★											
		VCMT160404-TM	16.5	9.525	4.76	4.4	0.4	★	☆	★			☆	★											
		VCMT160408-TM	16.5	9.525	4.76	4.4	0.8	★	☆	★			☆	★											
		VCMT160412-TM	16.5	9.525	4.76	4.4	1.2	★	☆	★			☆	★											

★ Recommended grade ☆ Available grade

Applicable tools



A

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling


Solid carbide end mill

Short hole drill

Solid carbide drill

A43

Profile turning insert

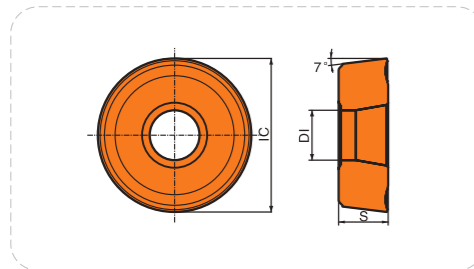


Working condition: ● Stable ● Average ■ Tough

Workpiece material	Working condition											
	●	●	●	●	●	●	●	●	●	●	●	●
P Steel	●	●	■	■	■	●	●	●	●	●	●	●
M Stainless steel						●	●	●	●	●	●	●
K Cast iron						●	●	●	●	●	●	●
N Non-ferrous metal											●	●
S Heat resistant super alloys Titanium alloy								●	●			

Processing	Insert shape	Type	Dimension (mm)			CVD		PVD		Cemented carbide	Cermet										
			IC	S	DI	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Profiling		RCMX1003MO	10	3.18	3.6	★	☆	★													
		RCMX1204MO	12	4.76	4.4	★	☆	★													
		RCMX1606MO	16	6.35	5.5	★	☆	★													
		RCMX2006MO	20	6.35	6.5	★	☆	★													
		RCMX2507MO	25	7.94	7.2	★	☆	★													
Profiling		RCMX3209MO	32	9.525	9.5	★	☆	★													
		RCMX1606MO-MR	16	6.35	5.5	★	☆	★													
		RCMX2006MO-MR	20	6.35	6.5	★	☆	★													
		RCMX2507MO-MR	25	7.94	7.2	★	☆	★													

★ Recommended grade ☆ Available grade

Planer insert

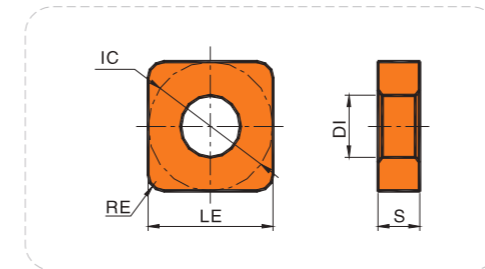

Working condition: ● Stable ● Average ■ Tough

Workpiece material	Working condition											
	●	●	●	●	●	●	●	●	●	●	●	●
P Steel	●	●	■	■	■	●	●	●	●	●	●	●
M Stainless steel						●	●	●	●	●	●	●
K Cast iron						●	●	●	●	●	●	●
N Non-ferrous metal											●	●
S Heat resistant super alloys Titanium alloy								●	●			

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet										
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Planer machining		SNMG120404-HAF	12.7	12.7	4.76	5.16	0.4																
Planer machining		SNMG120404-HSF	12.7	12.7	4.76	5.16	0.4																

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill


Solid carbide drill

A44

Cermet insert




Cermet insert

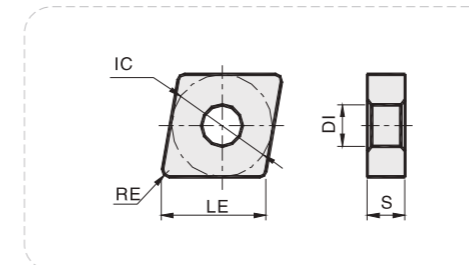

Workpiece material	Working condition: ● Stable ● Average ■ Tough																					
	P	M	K	N	S	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	Cermet	
Steel	●	●	■	■	■	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel													●	●	●	●						
Cast iron			●																			
Non-ferrous metal																				●	●	
Heat resistant super alloys Titanium alloy													●	●								

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet									
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HRK10	HRK20	HR115C						
Finishing and semi-machining		CNMG120404HQ	12.9	12.7	4.76	5.16	0.4														★	★
		CNMG120408HQ	12.9	12.7	4.76	5.16	0.8															

★ Recommended grade ☆ Available grade

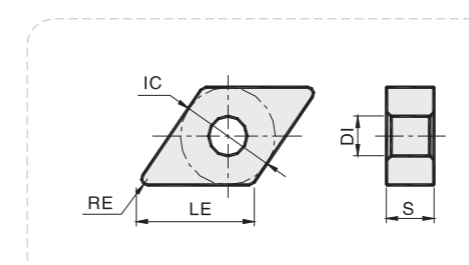

Workpiece material	Working condition: ● Stable ● Average ■ Tough																					
	P	M	K	N	S	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	Cermet	
Steel	●	●	■	■	■	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel													●	●	●	●						
Cast iron			●																			
Non-ferrous metal																				●	●	
Heat resistant super alloys Titanium alloy													●	●								

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet										
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HRK10	HRK20	HR115C							
Finishing and semi-machining		DNMG150404HQ	15.5	12.7	4.76	5.16	0.4															★	★
		DNMG150408HQ	15.5	12.7	4.76	5.16	0.8																

★ Recommended grade ☆ Available grade

- A
- General turning
- Turning of small components
- Threading
- Parting and grooving
- B
- Indexable milling
- Solid carbide end mill
- C
- Short hole drill
- Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cermet insert

Working condition: ● Stable ● Average ⏏ Tough

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135			HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10
Finishing and semi-machining		SNMG120404HQ	12.7	12.7	4.76	5.16	0.4																★	★

★ Recommended grade ☆ Available grade

Cermet insert

Working condition: ● Stable ● Average ⏏ Tough

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135			HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10
Finishing and semi-machining		VNMG160404HQ	16.5	9.525	4.76	3.81	0.4																★	★
		VNMG160408HQ	16.5	9.525	4.76	3.81	0.8																★	★

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Working condition: ● Stable ● Average ⏏ Tough

Working condition: ● Stable ● Average ⏏ Tough

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135			HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10
Finishing and semi-machining		TNMG160404HQ	16.5	9.525	4.76	3.81	0.4																★	★
		TNMG160408HQ	16.5	9.525	4.76	3.81	0.8																★	★

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ⏏ Tough

Working condition: ● Stable ● Average ⏏ Tough

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135			HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10
Finishing and semi-machining		WNMG080404HQ	8.7	12.7	4.76	5.16	0.4																★	★
		WNMG080408HQ	8.7	12.7	4.76	5.16	0.8																★	★

★ Recommended grade ☆ Available grade

A47

A48

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Cermet insert

Working condition: ● Stable ● Average ■ Tough

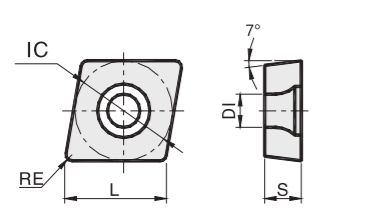

Workpiece material


- P** Steel
- M** Stainless steel
- K** Cast iron
- N** Non-ferrous metal
- S** Heat resistant super alloys Titanium alloy

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet										
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Finishing and semi-machining		CCMT060204HQ	6.4	6.35	2.38	2.8	0.4	●	●	■	■	●											★ ☆
		CCMT09T304HQ	9.7	9.525	3.97	4.4	0.4					●											★ ☆
		CCMT09T308HQ	9.7	9.525	3.97	4.4	0.8					●											★ ☆
		CPMH090308HQ	9.7	9.525	3.18	4.4	0.8					●											★ ☆

★ Recommended grade ☆ Available grade

Cermet insert

Working condition: ● Stable ● Average ■ Tough

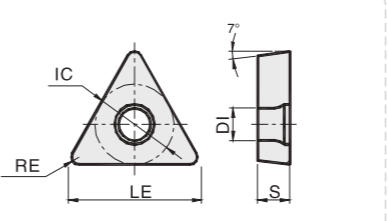

Workpiece material

- P** Steel
- M** Stainless steel
- K** Cast iron
- N** Non-ferrous metal
- S** Heat resistant super alloys Titanium alloy

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet										
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Finishing and semi-machining		TCMT110204HQ	11.0	6.35	2.38	2.8	0.4																★ ☆

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

Working condition: ● Stable ● Average ■ Tough

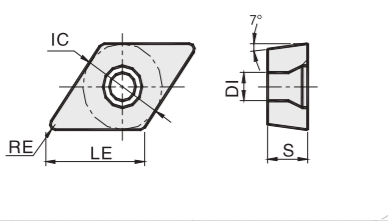


Workpiece material

- P** Steel
- M** Stainless steel
- K** Cast iron
- N** Non-ferrous metal
- S** Heat resistant super alloys Titanium alloy

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Finishing and semi-machining		DCMT070202HQ	7.8	6.35	2.38	2.8	0.2	●	●	■	■	●											★ ☆	
		DCMT070204HQ	7.8	6.35	2.38	2.8	0.4					●											★ ☆	
		DCMT070208HQ	7.8	6.35	2.38	2.8	0.8					●											★ ☆	
		DCMT11T302HQ	11.6	9.525	3.97	4.4	0.2					●												★ ☆
		DCMT11T304HQ	11.6	9.525	3.97	4.4	0.4					●												★ ☆
		DCMT11T308HQ	11.6	9.525	3.97	4.4	0.8					●												★ ☆

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ■ Tough

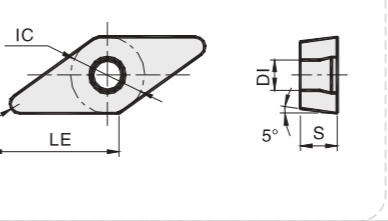

Workpiece material

- P** Steel
- M** Stainless steel
- K** Cast iron
- N** Non-ferrous metal
- S** Heat resistant super alloys Titanium alloy

Processing	Insert shape	Type	Dimension (mm)					CVD		PVD		Cemented carbide	Cermet											
			LE	IC	S	DI	RE	HR8105	HR8115	HR8125	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Finishing and semi-machining		VBMT110304HQ	11.0	6.35	3.18	2.8	0.4																★ ☆	
		VBMT110308HQ	11.0	6.35	3.18	2.8	0.8																★ ☆	
		VBMT160404HQ	16.5	9.525	4.76	4.4	0.4																★ ☆	
		VBMT160408HQ	16.5	9.525	4.76	4.4	0.8																	★ ☆

★ Recommended grade ☆ Available grade

Code key of general external turning tools

P **C** **L** **N** **R** **25** **25** **M** **12**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Clamping		③ Entering angle				④ Insert clearance angle				
M	Rigid clamping	B	D	F	G	N	Negative style (0°)			
P	Lever clamping					⑤ Hand of tool				
② Insert shape		J	K	L	P	R	Right hand			
C	80° rhombus					L	Left hand			
D	55° rhombus	S	T	V	R	N	Left and right hands			
R	Circular					⑥ Corner height (mm)				
S	Square					8	08			
T	Regular triangle					10	10			
V	35° rhombus					12	12			
W	Equilateral unequal hexagon					16	16			
⑦ Width of tool holder (mm)		⑧ Tool length (mm)		⑨ Cutting edge length (mm)						
8	08	D	60	Inscribed circle of insert						
10	10	E	70	Insert shape						
12	12	F	80	Square	Regular triangle	Circular	80° rhombus	55° rhombus	35° rhombus	
16	16	H	100	6.00	--	--	06	--	--	--
20	20	K	125	6.35	--	11	--	06	07	11
25	25	M	150	7.94	--	13	--	--	--	--
32	32	P	170	8.00	--	--	08	--	--	--
		Q	180	8.00	--	--	08	--	--	--
		R	200	9.525	09	16	--	09	11	16
				10.00	--	--	10	--	--	--
				12.00	--	--	12	--	--	--
				12.70	12	22	--	12	15	--
				15.875	15	27	--	16	--	--
				16.00	--	--	16	--	--	--
				19.05	19	--	--	19	--	--
				20.00	--	--	20	--	--	--
				25.00	--	--	25	--	--	--
				25.40	25	--	--	--	--	--
				32.00	--	--	32	--	--	--

Code key of general internal turning tools

S **16** **M-S** **C** **L** **C** **R** **09**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Tool material		③ Shank length (mm)		⑥ Entering angle					
Mark	Material	K	125	F	K	L	Q		
S	Steel	M	150						
② Tool diameter (mm)		Q	180	⑦ Insert clearance angle					
08	08	R	200	C	7°	⑧ Hand of tool			
10	10	S	250	P	11°	R	Right hand		
12	12	T	300	⑨ Cutting edge length (mm)					
16	16	U	350	Inscribed circle of insert		Insert shape			
20	20	④ Clamping		Square	Regular triangle	80° rhombus	55° rhombus	35° rhombus	
25	25	S	Screw clamping						
32	32	⑤ Insert shape		5.556	--	09	--	--	
		C	80° rhombus	6.350	--	11	06	07	11
		D	55° rhombus	9.525	09	16	09	11	--
		S	Square	12.70	12	--	12	--	--
		T	Regular triangle	15.875	15	27	--	--	--
		V	35° rhombus	16.00	--	--	16	--	--

A

General turning

Turning of small components

Parting and grooving

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

Overview of general turning tools (external machining)

Clamping style	Model	Entering angle (KAPR)°	Application						Workpiece shape		Page
			External turning	Face turning	External and face turning	Profiling	Profiling	Profiling			
P	PCBNR/L	75°	☺						☺		A59
	PCLNR/L	95°			☺				☺		A59
	PDJNR/L	93°					☺		☺	☹	A60
	PDPNN	62.5°						☺	☺		A60
	PSBNR/L	75°	☺						☺		A61
	PSDNN	45°						☺	☺		A61
	PSKNR/L	75°		☺					☺		A62
	PSSNR/L	45°	☺						☺		A62
	PTFNR/L	90°		☺					☺	☹	A63
	PTTNR/L	60°	☺						☺		A63
M	PTGNR/L	90°	☺						☺		A64
	PWLNRL/L	95°			☺				☺	☹	A64
	MCBNR/L	75°	☺						☺		A65
M	MCLNR/L	95°			☺				☺		A65

☺ Recommended ☹ Available

Overview of general turning tools (external machining)

Clamping style	Model	Entering angle (KAPR)°	Application						Workpiece shape		Page
			External turning	Face turning	External and face turning	Profiling	Profiling	Profiling			
M	MDJNR/L	93°							☺		A66
	MDPNN	62.5°							☺	☺	A67
	MSBNR/L	75°	☺						☺	☹	A68
	MSRNR/L	75°	☺						☺		A68
	MSKNR/L	75°		☺					☺		A69
	MSDNN	45°							☺	☺	A69
	MTGNR/L	90°	☺						☺		A70
	MTJNR/L	93°	☺						☺		A70
	MTFNR/L	90°		☺					☺	☹	A71
	MVVNN	72.5°							☺	☺	A71
M	MVJNR/L	93°							☺	☺	A72
	MWLNRL/L	95°			☺				☺	☹	A72
	MRGCR/L	/				☺			☺		A73
	MRDCN	/				☺			☺		A73

☺ Recommended ☹ Available

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A55

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A56

Overview of general turning tools (internal machining)

Model	Tool shape	Entering angle (KAPR) °	Shank diameter	Tool length	Minimum workpiece diameter	Page
S□□-SCLCR/L		95°	12	150	16	A74
			16	180	20	
			20	200	25	
			25	250	32	
S□□-SDQCR/L		107.5°	12	150	16	A74
			16	180	20	
			20	200	25	
			25	250	32	
S□□-SDUCR/L		93°	12	150	16	A75
			16	180	20	
			20	200	25	
S□□-SSKCR/L		75°	12	150	16	A75
			16	180	20	
			20	200	25	
			25	250	32	
S□□-STFCR/L		90°	16	180	20	A76
			20	200	25	
			25	250	32	
S□□-SVQBR/L		107.5°	20	200	27	A76
			25	250	35	
S□□-SVUBR/L		93°	25	250	35	A77
S□□-SVQCR/L		107.5°	16	180	22	A77
			25	250	35	
S□□-SVUCR/L		93°	20	200	28	A78
			25	250	35	
S□□-SCLPR/L		95°	12	150	16	A78
			16	180	20	
			20	200	25	
S□□-SDQPR/L		107.5°	12	150	16	A79
			16	180	20	
			20	200	25	

Overview of general turning tools (internal machining)

Model	Tool shape	Entering angle (KAPR) °	Shank diameter	Tool length	Minimum workpiece diameter	Page
S□□-SDUPR/L		93°	12	150	16	A79
			16	180	20	
S□□-STUPR/L		93°	12	180	16	A80
			16	180	20	

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

External turning tool

PCBNR/L
KAPR:75°



Model	Inventory		Dimension (mm)						Accessories					Matching insert	
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PCBNR/L	2020K12	△	△	20	20	125	27	20	17						
	2525M12	▲	▲	25	25	150	27	25	22	LLS0821	HC12WE	WR30L	GH4	DD4L	CN**1204
	3232P12	△	△	32	32	170	32	32	27						
	2525M16	▲	▲	25	25	150	38	25	22	LLS0825	HC16WE	WR30L	GH5	DD5L	CN**1606
	3232P16	△	△	32	32	170	38	32	27						
	3232P19	△	△	32	32	170	42	32	27	LLS1027	HC19WE	WR40L	GH6	DD6L	CN**1906

▲ Standing inventory △ Make-to-order

PCLNR/L
KAPR:95°



Model	Inventory		Dimension (mm)						Accessories					Matching insert	
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PCLNR/L	2020K12	△	△	20	20	125	28	20	25						
	2525M12	▲	▲	25	25	150	32	25	32	LLS0821	HC12WE	WR30L	GH4	DD4L	CN**1204
	3232P12	△	△	32	32	170	32	32	40						
	2525M16	▲	▲	25	25	150	38	25	32	LLS0825	HC16WE	WR30L	GH5	DD5L	CN**1606
	3232P16	△	△	32	32	170	38	32	40						
	3232P19	△	△	32	32	170	42	32	40	LLS1027	HC19WE	WR40L	GH6	DD6L	CN**1906

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

External turning tool


PDJNR/L
KAPR:93°



Model	Inventory		Dimension (mm)						Accessories					Matching insert	
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PDJNR/L	2020K11	△	△	20	20	125	25	20	25	LLS0617	HD11WE	WR25L	GH3	DD3L	DN**1104
	2525M11	▲	▲	25	25	150	28	25	32						
	2020K15	△	△	20	20	125	38	20	25						
	2525M15	▲	▲	25	25	150	38	25	32	LLS0821	HD15WE	WR30L	GH4B	DD4L	DN**1506
	3232P15	△	△	32	32	170	38	32	40						
	2020K15H	△	△	20	20	125	38	20	25						
	2525M15H	▲	▲	25	25	150	38	25	32	LLS0821	HD15WE	WR30L	GH4	DD4L	DN**1504
	3232P15H	△	△	32	32	170	38	32	40						

▲ Standing inventory △ Make-to-order

PDPNN
KAPR:62.5°

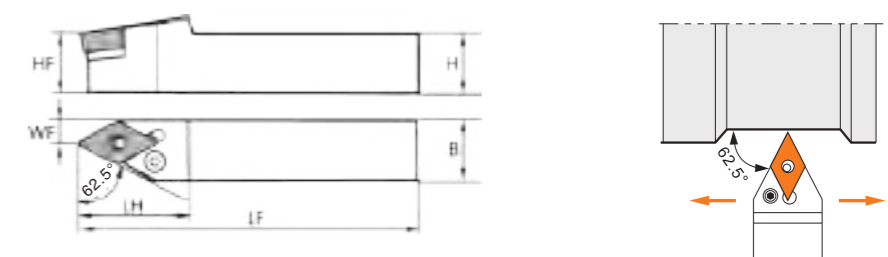

Model	Inventory		Dimension (mm)						Accessories					Matching insert	
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PDPNN	2020K15	▲		20	20	125	38	20	8						
	2525M15	▲		25	25	150	38	25	12.5	LLS0821	HD15WE	WR30L	GHB	DD4L	DN**1506
	3232P15	△		32	32	170	38	32	16						
	2020K15H	△		20	20	125	38	20	8						
	2525M15H	▲		25	25	150	38	25	12.5	LLS0821	HD15WE	WR30L	GH4	DD4L	DN**1504
	3232P15H	△		32	32	170	38	32	16						

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool

PSBNR/L
KAPR:75°

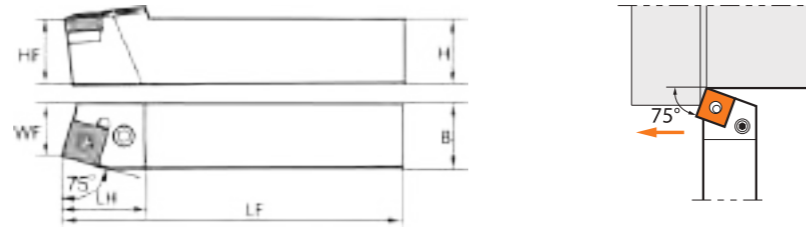

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PSBNR/L	2020K12	△	△	20	20	125	28	20	17						
	2525M12	▲	▲	25	25	150	28	25	22	LLS0821	HS12WE	WR30L	GH4	DD4L	SN**1204
	3232P12	△	△	32	32	170	32	32	27						
	2525M15	▲	▲	25	25	150	28	25	22	LLS0825	HS15WE	WR30L	GH5	DD5L	SN**1506
	3232P15	△	△	32	32	170	32	32	27						
	3232P19	△	△	32	32	170	32	32	27	LLS1027	HS19WE	WR40L	GH6	DD6L	SN**1906

▲ Standing inventory △ Make-to-order

PSDNN
KAPR:45°



Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PSDNN	2020K12	△	△	20	20	125	30	20	10						
	2525M12	▲	▲	25	25	150	30	25	12.5	LLS0821	HS12WE	WR30L	GH4	DD4L	SN**1204
	3232P12	△	△	32	32	170	40	32	16						
	2525M15	▲	▲	25	25	150	40	25	12.5	LLS0825	HS15WE	WR30L	GH5	DD5L	SN**1506
	3232P15	△	△	32	32	170	40	32	16						
	3232P19	△	△	32	32	170	40	32	16	LLS1027	HS19WE	WR40L	GH6	DD6L	SN**1906

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool


PSKNR/L
KAPR:75°

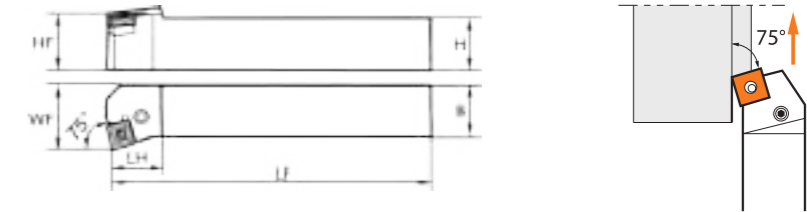

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PSKNR/L	2020K12	△	△	20	20	125	28	20	25						
	2525M12	▲	▲	25	25	150	28	25	32	LLS0821	HS12WE	WR30L	GH4	DD4L	SN**1204
	3232P12	△	△	32	32	170	32	32	40						
	2525M15	▲	▲	25	25	150	28	25	32	LLS0825	HS15WE	WR30L	GH5	DD5L	SN**1506
	3232P15	△	△	32	32	170	32	32	40						
	3232P19	△	△	32	32	170	32	32	40	LLS1027	HS19WE	WR40L	GH6	DD6L	SN**1906

▲ Standing inventory △ Make-to-order

PSSNR/L
KAPR:45°

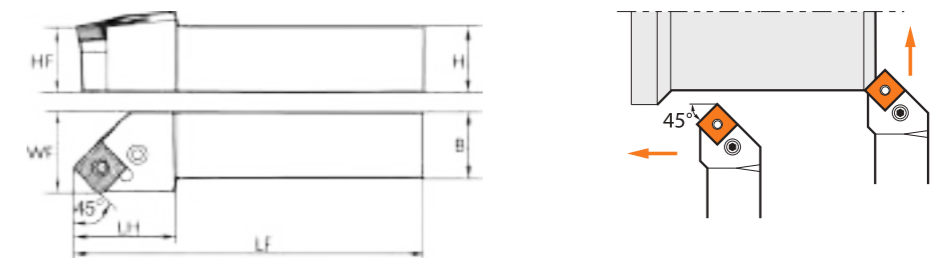

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PSSNR/L	2020K12	△	△	20	20	125	28	20	25						
	2525M12	▲	▲	25	25	150	28	25	32	LLS0821	HS12E	WR30L	GH4	DD4L	SN**1204
	3232P12	△	△	32	32	170	32	32	40						
	2525M15	▲	▲	25	25	150	28	25	32	LLS0825	HS15WE	WR30L	GH5	DD5L	SN**1506
	3232P15	△	△	32	32	170	32	32	40						
	3232P19	△	△	32	32	170	32	32	40	LLS1027	HS19WE	WR40L	GH6	DD6L	SN**1906

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

External turning tool


PTFNR/L
KAPR:90°



Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PTFNR/L	2020K16	△	△	20	20	125	23	20	25						
	2525M16	▲	▲	25	25	150	23	25	32	LLS0617	HT16WE	WR25L	GH3	DD3L	TN**1604
	2525M22	△	△	25	25	150	28	25	32	LLS0821	HT22WE	WR30L	GH4	DD4L	TN**2204
	3232P22	▲	▲	32	32	170	28	32	40	LLS0825	HT27WE	WR30L	GH5	DD5L	TN**2706
	3232P27	△	△	32	32	170	34	32	40	LLS0825	HT27WE	WR30L	GH5	DD5L	TN**2706

▲ Standing inventory △ Make-to-order

PTTNR/L
KAPR:60°

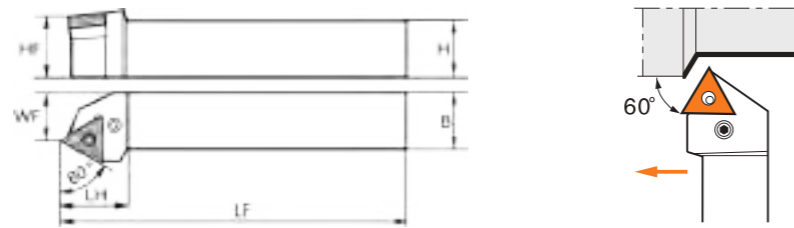

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PTTNR/L	2020K16	△	△	20	20	125	23	20	17	LLS0617	HT16WE	WR25L	GH3	DD3L	TN**1604
	2525M16	▲	▲	25	25	150	23	25	22	LLS0617	HT16WE	WR25L	GH3	DD3L	WN**0604
	2525M22	▲	▲	25	25	150	32	20	22	LLS0821	HT22WE	WR40L	GH4	DD4L	TN**2204

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool


PTGNR/L
KAPR:90°

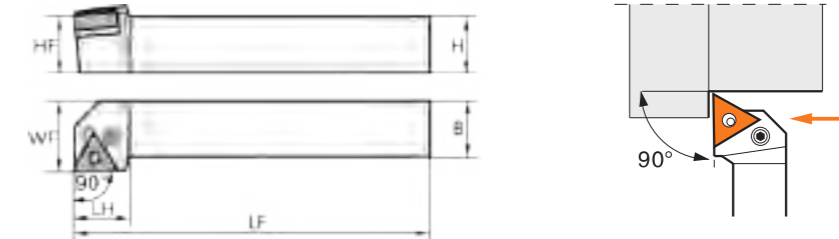

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PTGNR/L	2020K16	△	△	20	20	125	23	20	25	LLS0617	HT16WE	WR25L	GH3	DD3L	TN**1604
	2525M16	▲	▲	25	25	150	23	25	32	LLS0617	HT16WE	WR25L	GH3	DD3L	TN**1604
	3232P16	△	△	32	32	170	28	32	40	LLS0617	HT16WE	WR25L	GH3	DD3L	TN**1604
	2525M22	▲	▲	25	25	150	28	25	32	LLS0821	HT22WE	WR30L	GH4	DD4L	TN**2204
	3232P22	△	△	32	32	170	28	32	40	LLS0821	HT22WE	WR30L	GH4	DD4L	TN**2204
	3232P27	△	△	32	32	170	33	32	40	LLS0825	HT27WE	WR40L	GH5	DD5L	TN**2706

▲ Standing inventory △ Make-to-order

PWLNRL/L
KAPR:95°

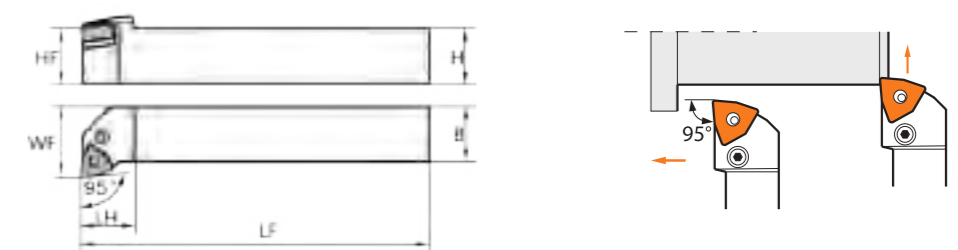

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Lever lock screw	Shim	Wrench	Lever	shim pin		
			H	B	LF	LH	HF	WF							
PWLNRL/L	2020K06	△	△	20	20	125	23	20	25	LLS0617	HW06WE	WR25L	GH3	DD3L	WN**0604
	2525M06	▲	▲	25	25	150	23	25	32	LLS0617	HW06WE	WR25L	GH3	DD3L	WN**0604
	2020K08	△	△	20	20	125	28	20	25	LLS0617	HW06WE	WR25L	GH3	DD3L	WN**0604
	2525M08	▲	▲	25	25	150	28	25	32	LLS0821	HW08WE	WR30L	GH4	DD4L	WN**0804
	3232P08	△	△	32	32	170	28	32	40	LLS0821	HW08WE	WR30L	GH4	DD4L	WN**0804

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


Short hole drill

Solid carbide drill

A65

External turning tool


MCBNR/L
KAPR:75°

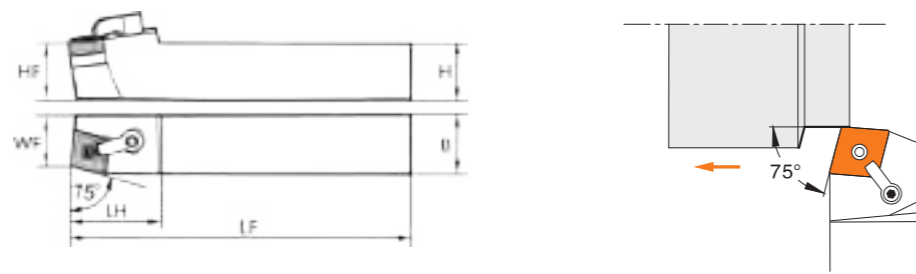

Model	Inventory	Dimension (mm)								Accessories					Matching insert
		Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin			
		R	L	H	B	LF	LH	HF	WF						
MCBNR/L	2020K12	△	△	20	20	125	35	20	17						
	2525M12	▲	▲	25	25	150	35	25	22	HM6 × 20	HC12WI	WR25L	HYD1	MP6 × 17	CN**1204
	3232P12	△	△	32	32	170	35	32	27			WR30L			
	2525M16	▲	▲	25	25	150	42	25	22	HM6 × 25	HC16WI		HYD2	MP8 × 21	CN**1606
	3232P16	△	△	32	32	170	42	32	27	HM6 × 28		WR30L			
	3232P19	△	△	32	32	170	42	32	27	HM8 × 35	HC19WI	WR40L	HYD5X	MP10 × 21	CN**1906

▲ Standing inventory △ Make-to-order

MCLNR/L
KAPR:95°

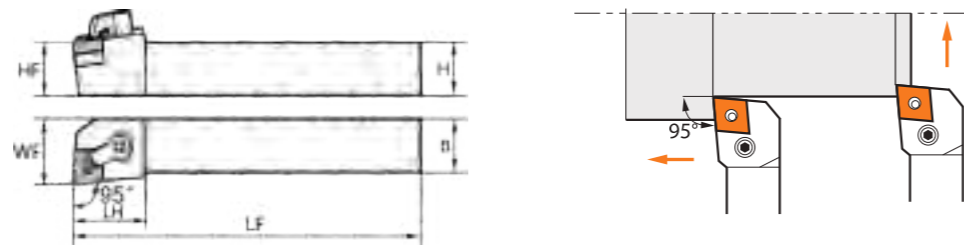

Model	Inventory	Dimension (mm)								Accessories					Matching insert
		Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin			
		R	L	H	B	LF	LH	HF	WF						
MCLNR/L	2020K12	△	△	20	20	125	32	20	25	HM6 × 20					
	2525M12	▲	▲	25	25	150	32	25	32	HM6 × 25	HC12WI	WR25L	HYD1	MP6 × 17	CN**1204
	3232P12	▲	▲	32	32	170	32	32	40	HM6 × 28		WR30L			
	2525M16	△	△	25	25	150	38	25	32	HM6 × 25	HC16WI	WR30L	HYD2	MP8 × 21	CN**1606
	3232P16	△	△	32	32	170	38	32	40	HM6 × 28					
	3232P19	△	△	32	32	170	42	32	40	HM8 × 35	HC19WI	WR40L	HYD5X	MP10 × 21	CN**1906

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


Short hole drill

Solid carbide drill

A66

External turning tool

MDJNR/L
KAPR:93°

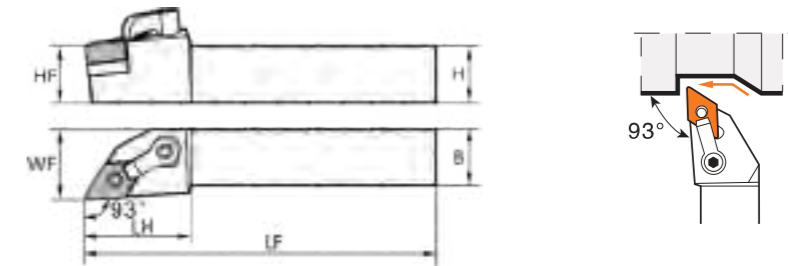

Model	Inventory	Dimension (mm)								Accessories					Matching insert
		Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin			
		R	L	H	B	LF	LH	HF	WF						
MDJNR/L	2020K11	△	△	20	20	125	32	20	25	HM6 × 25					
	2525M11	▲	▲	25	25	150	32	25	32	HM6 × 25	HD11WI	WR20L	HYD1	MP5 × 13	DN**1104
	3232P11	△	△	32	32	170	32	32	40	HM6 × 28		WR30L			
	2020K15	△	△	20	20	125	38	20	25	HM6 × 28					
	2525M15	▲	▲	25	25	150	38	25	32	HM6 × 25				MP6 × 19	DN**1506
	3232P15	△	△	32	32	170	38	32	40	HM6 × 28	HD15WI		HYD2		
	2020K15H	△	△	20	20	125	38	20	25	HM6 × 20		WR30L			
	2525M15H	▲	▲	25	25	150	38	25	32	HM6 × 25				MP6 × 17	DN**1504
	3232P15H	△	△	32	32	170	38	32	40	HM6 × 28					

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool

MDPNN
KAPR:62.5°

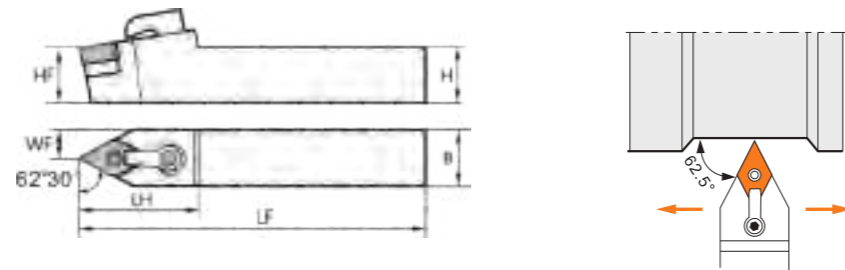


Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MDPNN	2020K11	△	△	20	20	125	35	20	10	HM6 × 20					
	2525M11	▲	▲	25	25	150	35	25	12.5	HM6 × 25	HD11WI	WR20L	HYD1	MP5 × 13	DN**1104
	3232P11	△	△	32	32	170	42	32	16	HM6 × 28		WR30L			
	2020K15	△	△	20	20	125	42	20	12.5	HM6 × 20					
	2525M15	▲	▲	25	25	150	42	25	12.5	HM6 × 25				MP6 × 19	DN**1506
	3232P15	△	△	32	32	170	42	32	16	HM6 × 28					
	2020K15H	△	△	20	20	125	42	20	12.5	HM6 × 20	HD15WI	WR30L	HYD2		
	2525M15H	▲	▲	25	25	150	42	25	12.5	HM6 × 25				MP6 × 17	DN**1504
	3232R15H	△	△	32	32	200	42	32	16	HM6 × 28					

▲ Standing inventory △ Make-to-order

External turning tool


MSBNR/L
KAPR:75°

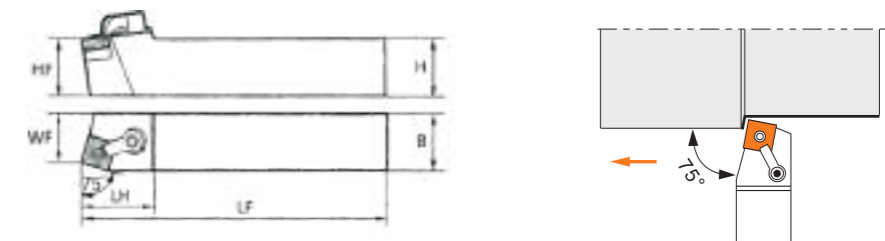

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MSBNR/L	2020K12	△	△	20	20	125	32	20	17	HM6 × 20					
	2525M12	▲	▲	25	25	150	32	25	22	HM6 × 25	HS12WI	WR25L	HYD1	MP6 × 17	SN**1204
	3232P12	△	△	32	32	170	32	32	27	HM6 × 28		WR30L			
	2525M15	▲	▲	25	25	150	38	25	22	HM6 × 25	HS15WI	WR30L	HYD2	MP8 × 21	SN**1506
	3232P15	△	△	32	32	170	38	32	27	HM6 × 28					
	3232P19	△	△	32	32	170	42	32	27	HM8 × 35	HS19WI	WR40L	HYD5X	MP10 × 21	SN**1906

▲ Standing inventory △ Make-to-order

MSRNR/L
KAPR:75°

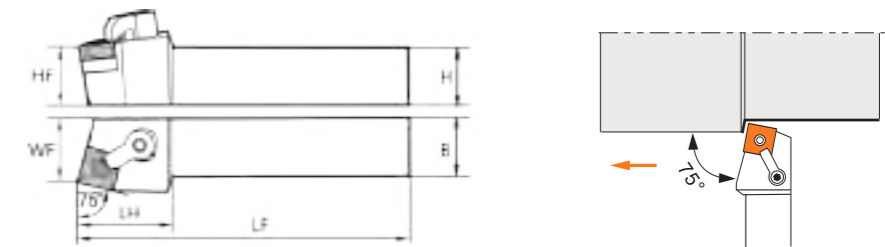

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MSRNR/L	2020K12	△	△	20	20	125	32	20	22	HM6 × 20					
	2525M12	▲	▲	25	25	150	32	25	27	HM6 × 25	HS12WI	WR25L	HYD1	MP6 × 17	SN**1204
	3232P12	△	△	32	32	170	32	32	35	HM6 × 28		WR30L			
	2525M15	▲	▲	25	25	150	38	25	27	HM6 × 25	HS15WI	WR30L	HYD2	MP8 × 21	SN**1506
	3232P15	△	△	32	32	170	38	32	35	HM6 × 28					
	3232P19	△	△	32	32	170	42	32	35	HM8 × 35	HS19WI	WR40L	HYD5X	MP10 × 21	SN**1906

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool


MSKNR/L
KAPR:75°

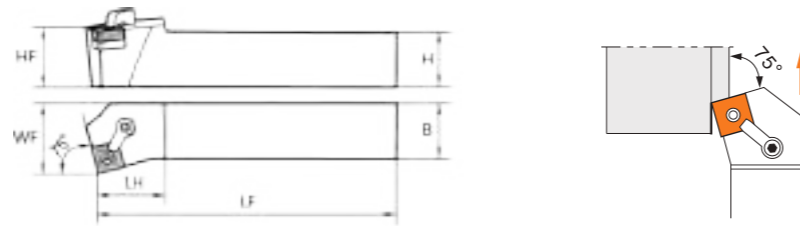

Model	Inventory		Dimension (mm)							Accessories					Matching insert
			Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
	R	L	H	B	LF	LH	HF	WF							
MSKNR/L	2020K12	△	△	20	20	125	32	20	25	HM6 × 20					
	2525M12	▲	▲	25	25	150	32	25	32	HM6 × 25	HS12WI	WR25L	HYD1	MP6 × 17	SN**1204
	3232P12	△	△	32	32	170	32	32	40	HM6 × 28		WR30L			
	2525M15	▲	▲	25	25	150	38	25	32	HM6 × 25					
	3232P15	△	△	32	32	170	38	32	40	HM6 × 28					
	3232P19	△	△	32	32	170	42	32	40	HM8 × 35	HS19WI	WR40L	HYD5X	MP10 × 21	SN**1906

▲ Standing inventory △ Make-to-order

MSDNN
KAPR:45°

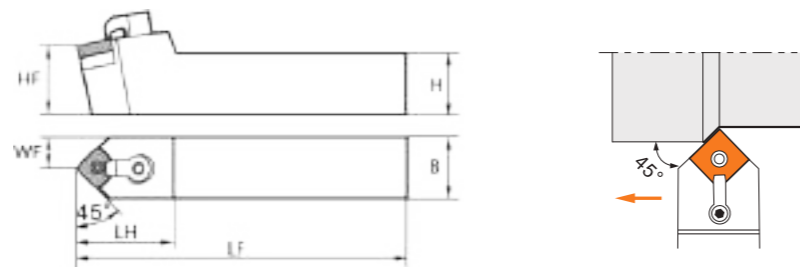

Model	Inventory		Dimension (mm)							Accessories					Matching insert
			Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
	R	L	H	B	LF	LH	HF	WF							
MSDNN	2020K12	△		20	20	125	35	20	10	HM6 × 25					
	2525M12	▲		25	25	150	35	25	12.5	HM6 × 25	HS12WI	WR25L	HYD1	MP6 × 17	SN**1204
	3232P12	△		32	32	170	42	32	16						
	2525M15	▲		25	25	150	42	25	12.5	HM6 × 28					
	3232P15	△		32	32	170	42	32	16		HS15WI	WR30L	HYD2	MP8 × 21	SN**1506

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool


MTGNR/L
KAPR:90°

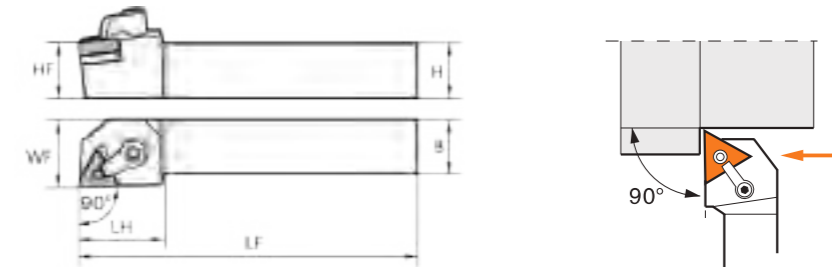

Model	Inventory		Dimension (mm)							Accessories					Matching insert
			Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
	R	L	H	B	LF	LH	HF	WF							
MTGNR/L	2020K16	△	△	20	20	125	32	20	25	HM6 × 25					
	2525M16	▲	▲	25	25	150	32	25	32	HM6 × 25	HT16WI	WR20L	HYD1	MP5 × 13	TN**1604
	3232P16	△	△	32	32	170	32	32	40	HM6 × 28		WR30L			
	2525M22	▲	▲	25	25	150	38	25	32	HM6 × 25					
	3232P22	△	△	32	32	170	38	32	40	HM6 × 28	HT22WI	WR25L	HYD2	MP6 × 17	TN**2204
												WR30L			

▲ Standing inventory △ Make-to-order

MTJNR/L
KAPR:93°

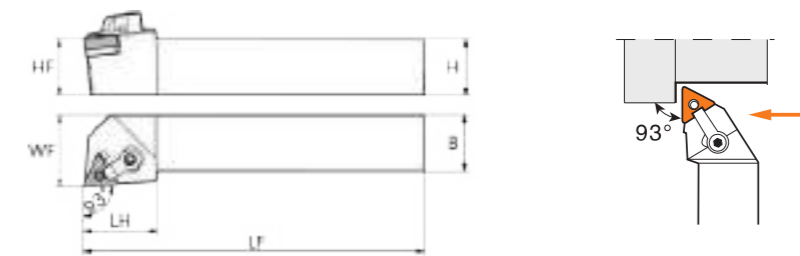

Model	Inventory		Dimension (mm)							Accessories					Matching insert
			Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
	R	L	H	B	LF	LH	HF	WF							
MTJNR/L	2020K16	△	△	20	20	125	32	20	25	HM6 × 25					
	2525M16	▲	▲	25	25	150	32	25	32	HM6 × 30					
	3232P16	△	△	32	32	170	32	32	40						
	2525M22	▲	▲	25	25	150	38	25	32						
	3232P22	△	△	32	32	170	38	32	40						
											HT22WI	WR30L	HYD2	MP6 × 17	TN**2204

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool


MTFNR/L
KAPR:90°

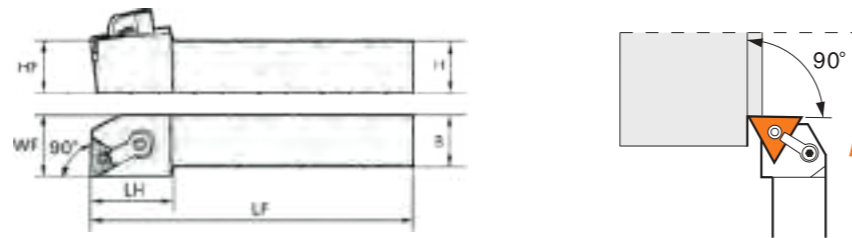

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MTFNR/L	2020K16	△	△	20	20	125	32	20	25	HM6 × 25					
	2525M16	▲	▲	25	25	150	32	25	32	HM6 × 25	HT16WI	WR20L	HYD1	MP5 × 13	TN**1604
	3225P16	△	△	32	25	170	32	32	32	HM6 × 28		WR30L			
	3232P16	△	△	32	32	170	32	32	40						
	2525M22	▲	▲	25	25	150	38	25	32	HM6 × 25					
	3225P22	△	△	32	25	170	38	32	32	HM6 × 28	HT22WI	WR25L	HYD2	MP6 × 17	TN**2204
	3232P22	△	△	32	32	170	38	32	40			WR30L			

▲ Standing inventory △ Make-to-order

MVVNN
KAPR:72.5°

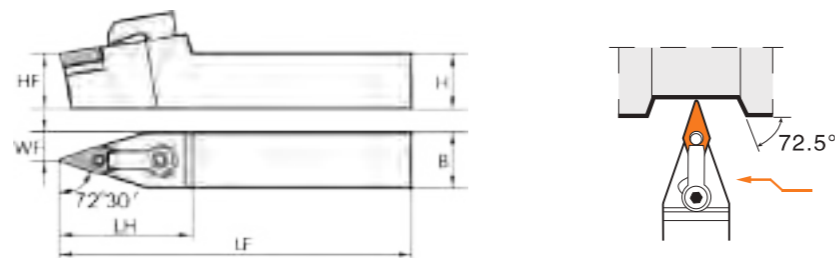

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MVVNN	2020K16	△		20	20	125	45	20	10	HM6 × 25					
	2525M16	▲		25	25	150	45	25	12.5	HM6 × 25	HV16WI	WR20L	HYD3	MP5 × 13	VN**1604
	3232P16	△		32	32	170	45	32	16	HM6 × 28		WR30L			

▲ Standing inventory △ Make-to-order

External turning tool


MVJNR/L
KAPR:93°



Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MVJNR/L	2020K16	△	△	20	20	125	45	20	25	HM6 × 25					
	2525M16	▲	▲	25	25	150	45	25	32	HM6 × 25	HV16WI	WR20L	HYD3	MP5 × 13	VN**1604
	3232P16	△	△	32	32	170	45	32	40	HM6 × 28		MR30L			

▲ Standing inventory △ Make-to-order

MWLNR/L
KAPR:95°

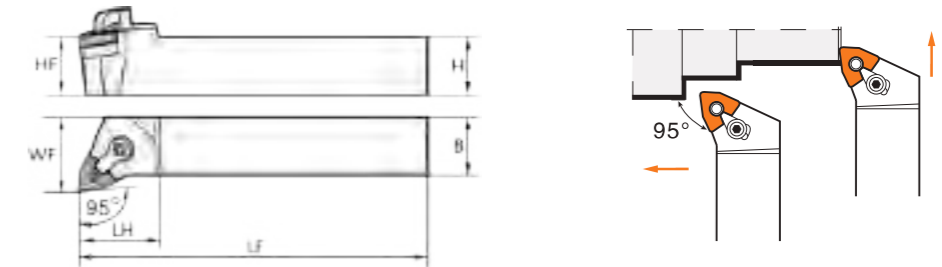

Model	Inventory		Dimension (mm)							Accessories					Matching insert
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin		
			H	B	LF	LH	HF	WF							
MWLNR/L	2020K06	△	△	20	20	125	28	20	25	HM5 × 20	HW06WI	WR20L	HYD0	MP5 × 13	WN**0604
	2525M06	▲	▲	25	25	150	28	25	32	HM5 × 20	HW06WI	WR30L			
	2020K08	△	△	20	20	125	32	20	25	HM6 × 20					
	2525M08	▲	▲	25	25	150	32	25	32	HM6 × 25	HW08WI	WR25L	HYD1	MP6 × 17	WN**0804
	3232P08	△	△	32	32	170	32	32	40	HM6 × 28		WR30L			

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

External turning tool


MRGCR/L

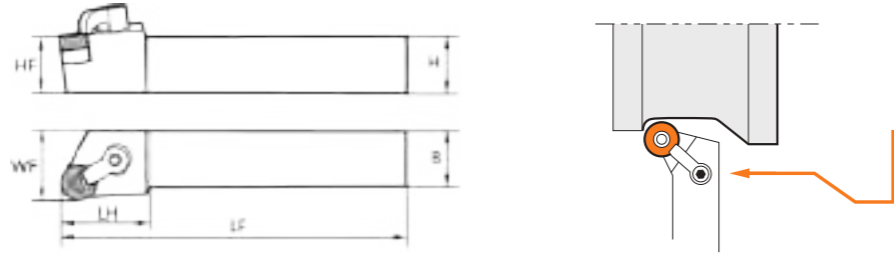

Model	Inventory		Dimension (mm)							Accessories					Matching insert	
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin			
MRGCR/L	2525M12	△	△	25	25	150	45	25	32	HM6 × 25		WR25L				
	3232P12	▲	▲	32	32	170	45	32	40	HM6 × 28	HR12WI	WR30L	HYD1	MP6 × 17	RC**1204	

▲ Standing inventory △ Make-to-order

MRDCN

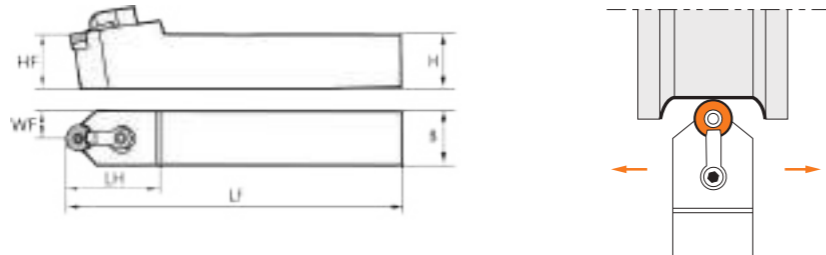


Model	Inventory		Dimension (mm)							Accessories					Matching insert	
	R	L	Size of cutter square		Length size		Corner height	Head width	Clamp screw	Shim	Wrench	Cantilever clamp	Lock pin			
MRDCN	2020K12	△	△	20	20	125	35	20	10	HM6 × 25						
	2525M12	▲	▲	25	25	150	35	25	12.5	HM6 × 30	HR12WI	WR30L	HYD1	MP6 × 17	RC**1204	
	3232P12	△	△	32	32	170	35	32	16							

▲ Standing inventory △ Make-to-order

Internal turning tool


S□□-SCLCR/L KAPR:95°

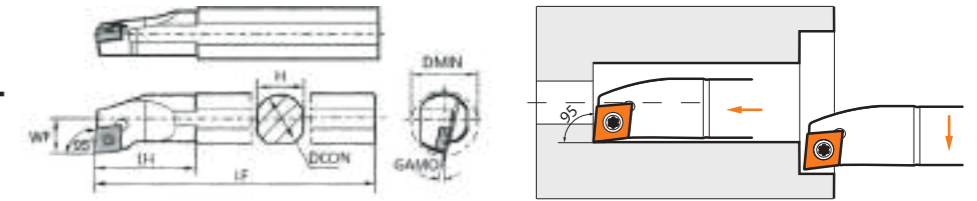

Model	Inventory		Basic dimension (mm)						Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench		
	S12M-SCLCR/L06	△	△	16	12	11	150	7.5	M2.5 × 5.5		CC**0602
	S12M-SCLCR/L09	△	△	16	12	11	150	8	M3.5 × 8		CC**09T3
	S16Q-SCLCR/L09	△	△	20	16	15	180	10	M3.5 × 8	WR15	
	S20R-SCLCR/L09	▲	▲	25	20	19	200	12	M3.5 × 10		
	S25S-SCLCR/L09	▲	▲	32	25	24	250	15.5	M3.5 × 10		
	S20R-SCLCR/L12	▲	▲	25	20	19	200	12.5	M4.0 × 11		CC**1204
S25S-SCLCR/L12	▲	▲	32	25	24	250	15.5	M4.0 × 11			

▲ Standing inventory △ Make-to-order

S□□-SDQCR/L KAPR:107.5°

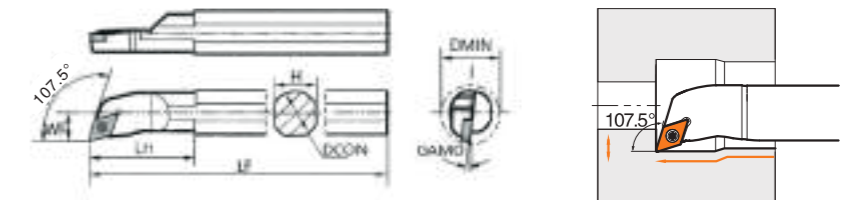

Model	Inventory		Basic dimension (mm)						Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench		
	S12M-SDQCR/L07	△	△	16	12	11	150	9	M2.5 × 6.5	WR07	DC**0702
	S16Q-SDQCR/L07	△	△	20	16	15	180	11	M2.5 × 6.5	WR07	
	S20R-SDQCR/L11	▲	▲	25	20	19	200	13	M3.5 × 8	WR15	DC**11T3
	S25S-SDQCR/L11	▲	▲	32	25	24	250	17	M3.5 × 10		

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Internal turning tool

S□□-SDUCR/L
KAPR:93°

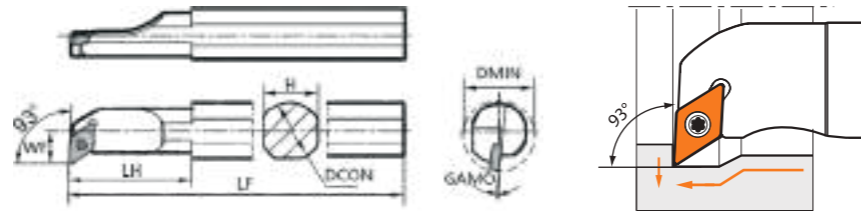


Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	△	△	16	12	11	150	9	M2.5 × 6.5	WR07	DC**0702
	△	△	20	16	15	180	11			
	▲	▲	25	20	19	200	13	M3.5 × 8	WR15	DC**11T3

▲ Standing inventory △ Make-to-order

Internal turning tool


S□□-STFCR/L
KAPR:90°

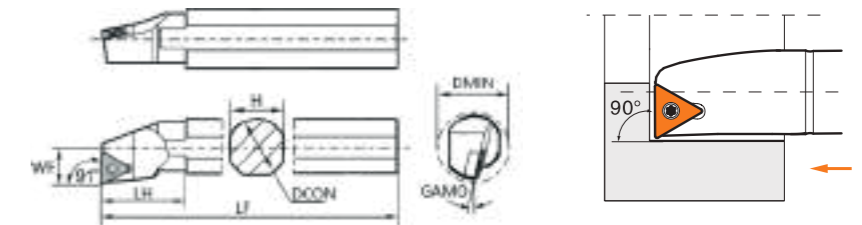

Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	△	△	20	16	15	180	10	M2.5 × 6.5	WR07	TC**1102
	△	△	25	20	19	200	12			
	▲	▲	32	25	24	250	16	M3.5 × 10	WR15	TC**16T3

▲ Standing inventory △ Make-to-order


S□□-SSKCR/L
KAPR:75°

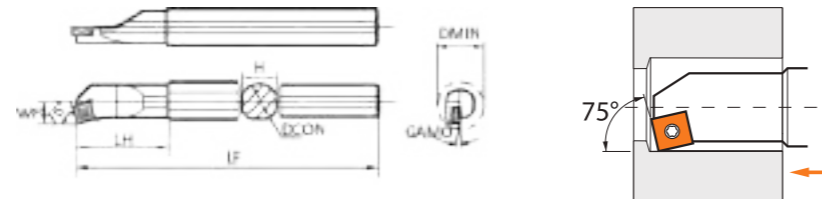

Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	△	△	16	12	11	150	9	M3.5 × 8	WR15	SC**09T3
	△	△	20	16	15	180	11			
	▲	▲	25	20	19	200	13	M4 × 1	WR15	SC**1204
	▲	▲	32	25	24	250	17			

▲ Standing inventory △ Make-to-order

S□□-SVQBR/L
KAPR:107.5°

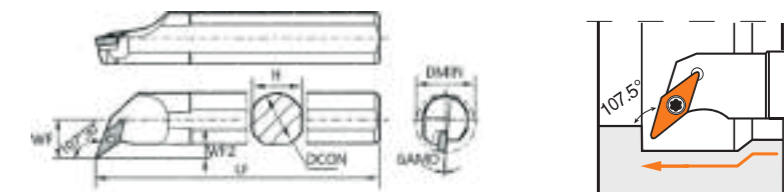

Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	▲	▲	27	20	19	200	14	M3.5 × 12	WR15	VB**1604
	▲	▲	35	25	24	250	20			

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Internal turning tool

S□□-SVUBR/L
KAPR:93°

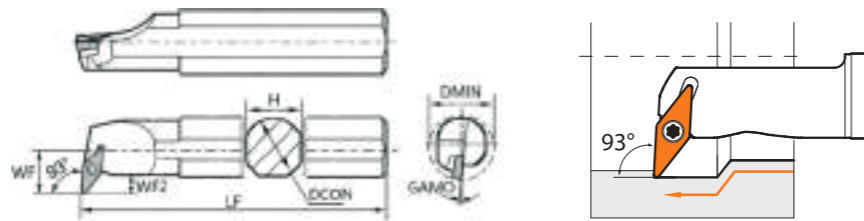


Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	▲	▲	35	25	24	250	20	M3.5 × 12	WR15	VB**1604

▲ Standing inventory △ Make-to-order

Internal turning tool


S□□-SVUCR/L
KAPR:93°

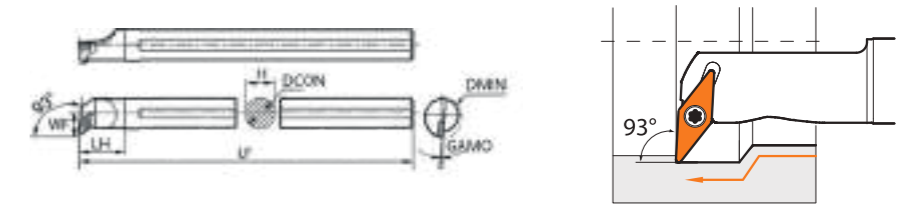

Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	▲	▲	28	20	19	200	14	M3.5 × 12	WR15	VC**1604
	▲	▲	35	25	24	250	20			

▲ Standing inventory △ Make-to-order


S□□-SVQCR/L
KAPR:107.5°

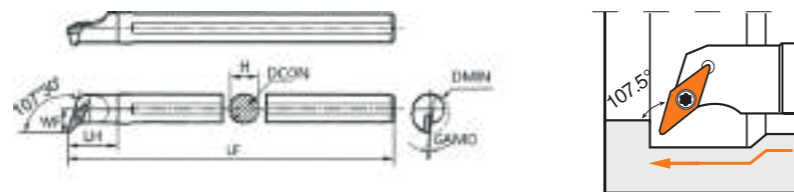

Model	Inventory		Basic dimension (mm)					Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench	
	▲	▲	22	16	15	180	12	M2.5 × 6.5	WR07	VC**1103
	▲	▲	35	25	24	250	20	M3.5 × 12	WR15	VC**1604

▲ Standing inventory △ Make-to-order

S□□-SCLPR/L
KAPR:95°

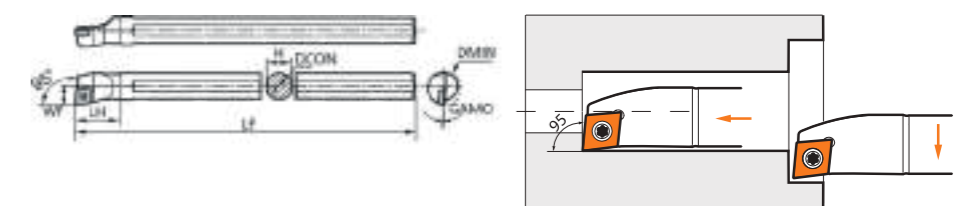

Model	Inventory		Basic dimension (mm)						Accessories		Matching insert
	R	L	DMIN	DCON	H	LF	WF	GAMO	Insert screw	Wrench	
	△	△	16	12	11	150	8	-4°	M2.5 × 5.5	WR07	CP**0602
	△	△	20	16	15	180	10	-4°	M3.5 × 8	WR15	CP**09T3
	▲	▲	25	20	18	200	13	-4°			

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Internal turning tool

S□□-SDQPR/L
KAPR:107.5°

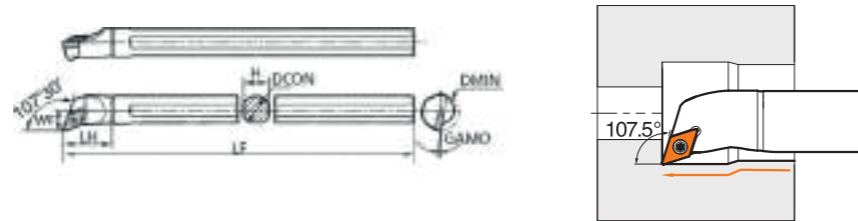


Model	Inventory		Basic dimension (mm)							Accessories			Matching insert
	R	L	DMIN	DCON	H	LF	WF	GAMO	Insert screw	Wrench			
	S12M-SDQPR/L07	△	△	16	12	11	150	9	-8°	M2.5 × 5.5	WR07	DP**0702	
	S16Q-SDQPR/L07	△	△	20	16	15	180	11	-6°	M2.5 × 6.5			
	S20R-SDQPR/L11	▲	▲	25	20	18	200	13	-6°	M3.5 × 8	WR15	DP**11T3	

▲ Standing inventory △ Make-to-order

Internal turning tool


S□□-STUPR/L
KAPR:93°

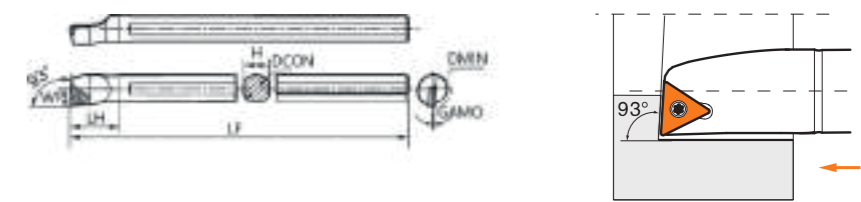

Model	Inventory		Basic dimension (mm)							Accessories			Matching insert
	R	L	DMIN	DCON	H	LF	WF	Insert screw	Wrench				
	S12Q-STUPR/L11	△	△	16	12	11.4	180	7.5	M2.5 × 6.5	WR07	TP**1103		
	S16R-STUPR/L11	▲	▲	20	16	15	180	10					

▲ Standing inventory △ Make-to-order

S□□-SDUPR/L
KAPR:93°

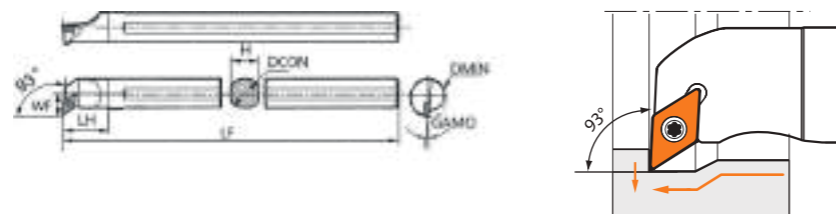

Model	Inventory		Basic dimension (mm)							Accessories			Matching insert
	R	L	DMIN	DCON	H	LF	WF	GAMO	Insert screw	Wrench			
	S12M-SDUPR/L07	△	△	16	12	11	150	9	-8°	M2.5 × 5.5	WR07	DP**0702	
	S16Q-SDUPR/L07	▲	▲	20	16	15	180	11	-6°	M2.5 × 6.5			

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Comparison table of general turning inserts in metric and Inch (Negative)

C-type negative angle	ISO	Inch	D-type negative angle	ISO	Inch	S-type negative angle	ISO	Inch
CNMG	090304	321	DNMG	110404	331	SNMG	090304	321
	090308	322		110408	332		090308	322
	120404	431		110412	333		090312	323
	120408	432		150404	431		120404	431
	120412	433		150408	432		120408	432
	120416	434		150412	433		120412	433
	160608	542		150604	441		120416	434
	160612	543		150608	442		150608	542
	160616	544		150612	443		150612	543
	190608	642		150616	444		150616	544
	190612	643		190608	542		190412	633
	190616	644		190612	543		190424	636
	190624	646					190612	643
	250724	856					190616	644
	250732	858					250724	856
	250924	866					250732	858
	250932	868					250924	866
							250932	868

T-type negative angle	ISO	Inch	W-type negative angle	ISO	Inch	V-type negative angle	ISO	Inch
TNMG	110304	221	WNMG	06T304	3(2.5)1	VNMG	160404	331
	110308	222		06T308	3(2.5)2		160408	332
	160404	331		06T312	3(2.5)3		160412	333
	160408	332		060404	331			
	160412	333		060408	332			
	220404	431		060412	333			
	220408	432		080404	431			
	220412	433		080408	432			
	220416	434		080412	433			
	270608	542						
	270612	543						
	270616	544						

R-type negative angle	ISO	Inch
RNMG	0903MO	32
	1204MO	43

Comparison table of general turning inserts in metric and Inch (Positive)

C-shape positive	ISO	Inch	D-shape positive	ISO	Inch	S-shape positive	ISO	Inch
CCMT/ CCGT	060202	2(1.5)0	DCMT/ DCGT	070202	2(1.5)0	SCMT	060204	2(1.5)1
	060204	2(1.5)1		070204	2(1.5)1		09T302	3(2.5)0
	060208	2(1.5)2		070208	2(1.5)2		09T304	3(2.5)1
	09T302	3(2.5)0		11T302	3(2.5)0		09T308	3(2.5)2
	09T304	3(2.5)1		11T304	3(2.5)1		120404	431
	09T308	3(2.5)2		11T308	3(2.5)2		120408	432
	120404	431		11T312	3(2.5)3		120412	433
	120408	432					150404	531
	120412	433					150408	532
							150412	533
							190408	632
							190412	633
							190416	634

T-shape positive	ISO	Inch	V-shape positive	ISO	Inch	
TCMT/ TCGT	06T102	1.2(1.2)0	VBMT/ VBGT	110202	2(1.5)0	
	06T104	1.2(1.2)1		110204	2(1.5)1	
	06T108	1.2(1.2)2		110208	2(1.5)2	
	090202	1.8(1.5)0		110302	220	
	090204	1.8(1.5)1		110304	221	
	090208	1.8(1.5)2		110308	222	
	110202	2(1.5)0		VCMT/ VCGT	160402	330
	110204	2(1.5)1		160404	331	
	110208	2(1.5)2		160408	332	
	110302	220		160412	333	
	110304	221				
	110308	222				
	16T302	3(2.5)0				
	16T304	3(2.5)1				
	16T308	3(2.5)2				
	16T312	3(2.5)3				
	160400	330				
	220408	432				
	220412	433				
	220416	434				
	270408	532				
270412	533					
330612	643					
330616	644					

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cutting speed recommendations for general external turning

Machined workpiece materials					Product grade																																
ISO	Classification of materials		Hardness of Brinell (HB)	Tensile strength (N/mm ²)	HR8105		HR8115		HR8125		HR8225		HR8135		HR7125		HR7225		HR6115		HR9105		HR7115		HRK10		HRK20										
					Feed rate <i>f</i> (mm/r)																																
					0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.4	0.6	0.1	0.4	0.6
Cutting speed <i>v</i> (m/min)																																					
P	Unalloyed steel	C ≤ 0.25%	Annealing	125	428	420	360	270	400	320	240	380	260	210	400	310	230	250	170	40																	
		0.25 < C ≤ 0.55%	Annealing	190	639	370	270	210	350	260	200	280	200	150	320	240	190	200	135	10																	
		0.25 < C ≤ 0.55%	Quenching and tempering	210	708	280	220	70	270	210	160	200	60	135	250	200	160	50	125	90																	
		C > 0.55%	Annealing	190	639	270	220	160	270	210	150	240	160	125	270	200	150	70	10	90																	
		C > 0.55%	Quenching and tempering	300	1013	210	180	150	210	170	150	160	120	110	210	160	150	25	75	65																	
	Short chip steel	Annealing	220	745	400	310	250	380	280	210	360	220	75	360	270	210	220	45	15																		
	Low-alloyed steel	Annealing	175	591	350	260	220	320	220	80	240	75	35	290	210	80	200	65	50																		
		Quenching and tempering	300	1013	220	70	50	110	60	40	40	0	85	90	60	40	35	90	70																		
		Quenching and tempering	380	1282	60	20	0	200	50	20	0	70	55	180	50	20	90	65	45																		
	High alloy steel and high alloy tool steel	Annealing	200	675	330	230	50	300	220	50	210	45	85	260	200	180	180	50	85																		
Quenching and tempering		300	1013	230	140	10	220	120	10	30	85	65	200	80	160	10	85	65																			
Quenching and tempering		400	1361	80	70		130	20																													
M	Stainless steel	Ferrite/martensite, annealing	200	675																																	
		Martensite, quenching and tempering	330	1114																																	
	Stainless steel	Austenite, quenching	200	675																																	
		Austenite, precipitation hardening stainless steel (PH stainless steel)	300	1013																																	
	Austenite-ferrite, duplex stainless steel	230	778																																		
K	Malleable cast iron	Ferrite	200	400																																	
		Pearlite	260	700																																	
	Grey cast iron	Low tensile strength	180	200																																	
		High tensile strength/austenite	245	350																																	
	Nodular cast iron	Ferrite	155	400																																	
Pearlite		265	700																																		
	Compacted graphite iron GGV (CGI)	230	400																																		

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cutting speed recommendations for general external turning

Machined workpiece materials				Product grade																																			
ISO	Classification of materials		Hardness of Brinell (HB)	Tensile strength (N/mm ²)	HR8105	HR8115			HR8125			HR8225			HR8135			Feed rate <i>f</i> (mm/r)						Cutting speed <i>v</i> (m/min)															
					HR7125	HR7225			HR6115			HR9105			HR7115			HRK10		HRK20		0.1		0.3		0.5		0.1		0.3		0.5		0.1		0.4		0.6	
					0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6	0.1	0.4	0.6		
N	Wrought aluminum alloy	Non-aging	30	—																																			
		Ageable and aged	100	340																																			
	Foundry aluminum alloy	≤ 12% silicon, non-aging	75	260																																			
		≤ 12% silicon, ageable and aged	90	310																																			
		> 12% silicon, non-aging	130	450																																			
	Magnesium alloy		70	250																																			
	Copper and copper alloys (bronze/brass)	Non-alloyed, electrolytic copper		100	340																																		
		Brass, bronze, red brass		90	310																																		
		Copper alloy, short chip		110	380																																		
		Ampco alloy of high strength		300	1010																																		
S	Iron-based alloy	Iron-based		Annealing	200	680													90	60																			
				Aged	280	940														70	50																		
		Nickel-based or cobalt-based		Annealing	250	840															70	50																	
				Aged	350	1180																60	40																
			Annealing	320	1080															50	30																		
	Cobalt-based alloy	Pure titanium		200	680																																		
		α and β phase alloys, aged		375	1260																70	45																	
		β phase alloy		410	1400																40	35																	
	Nickel-based alloy	1177		300	1010																																		
	Titanium alloy	1262		300	1010																60																		

Cutting parameters recommendation for internal turning

(Positive style: standard machining diameter > φ10)

[Cutting depth: radius value (radial cutting depth)]

ISO	Raw material	Hardness	Processing	Condition	Recommended material	Corner radius (RE)	Lower limit - recommended value - upper limit		
							Speed Vc (m/min)	Cutting depth ap (mm)	Feed f (mm/rev)
P	Low carbon steel	300HB	Precision finishing	Continuous Interrupt	HR8115 HR8225	0.4	250-300-350 120-170-220	0.05-0.3-0.5 0.05-0.3-0.5	0.03- 0.1- 0.15 0.03- 0.1- 0.15
			Finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	200-250-300 150-200-250	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2
			Finishing - semi-finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	150-200-250 100-150-200	0.5-1.0-2.0 0.5-1.0-1.5	0.1- 0.15- 0.25 0.1- 0.15- 0.2
	Low carbon alloy Steel	300HB	Semi-finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	100-150-200 80- 120- 150	1.0-1.5-2.5 1.0-1.5-2.0	0.1- 0.15- 0.3 0.1- 0.15- 0.2
			Precision finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	150-200-250 120-140- 170	0.05-0.3-0.5 0.05-0.3-0.5	0.03- 0.1- 0.15 0.03- 0.1- 0.15
			Finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	150-200-250 120-180- 200	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2
	Medium carbon steel Medium carbon alloy	300HB	Finishing - semi-finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	120-180-220 100-150-200	0.5-1.0-2.0 0.5-1.0-1.5	0.1- 0.15- 0.25 0.1- 0.15- 0.2
			Semi-finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	100-150-200 80- 120- 150	1.0-1.5-2.5 1.0-1.5-2.0	0.1- 0.15- 0.3 0.1- 0.15- 0.2
			Precision finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	120-150-180 110-130-160	0.05-0.3-0.5 0.05-0.3-0.5	0.03- 0.1- 0.15 0.03- 0.1- 0.15
	High carbon Alloy steel	280HB	Finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	120-150-180 100-120-150	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2
			Finishing - semi-finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	120-150-180 100-120-150	0.5-1.0-2.0 0.5-1.0-1.5	0.1- 0.15- 0.25 0.1- 0.15- 0.2
			Semi-finishing	Continuous Interrupt	HR8115 HR8225	0.4 0.8	100-120-150 80- 100- 120	1.0-1.5-2.5 1.0-1.5-2.0	0.1- 0.15- 0.3 0.1- 0.15- 0.2
M	Stainless steel (austenite)	220HB	Finishing	Continuous Interrupt	HR7125 HR7225	0.4 0.8	120-150-180 100-120-150	0.2-0.5-0.8 0.2-0.5-0.8	0.05-0.08- 0.1 0.05-0.08- 0.1
			Semi-finishing	Continuous Interrupt	HR7125 HR7225	0.4 0.8	120-150-180 100-120-150	0.5-1.0-1.5 0.5-1.0-1.5	0.05- 0.1- 0.2 0.05- 0.1- 0.2
	Stainless steel (precipitation and hardening)	300HB	Finishing	Continuous Interrupt	HR7125 HR7225	0.4 0.8	80- 100- 120 60- 80- 100	0.2-0.7-1.0 0.2-0.7-1.0	0.05- 0.1- 0.15 0.05- 0.1- 0.15
			Semi-finishing	Continuous Interrupt	HR7125 HR7225	0.4 0.8	80- 100- 120 60- 80- 100	0.5-1.0-1.5 0.5-1.0-1.5	0.05- 0.1- 0.2 0.05- 0.1- 0.2
	Grey cast iron	250HB	High speed finishing	Continuous Interrupt	HR6115	0.4 0.8	400-500-600 200-250-350	0.05-0.2-0.5 0.2-0.5-1.0	0.05- 0.1- 0.15 0.05- 0.1- 0.15
			Finishing (with high luster)	Continuous Interrupt	HR6115	0.4 0.8	200-250-300 120-180-230	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2
Finishing			Continuous Interrupt	HR6115	0.4 0.8	150-180-200 100-150-180	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2	
Semi-finishing			Continuous Interrupt	HR6115	0.4 0.8	100-150-200 80- 120- 150	0.5-1.0-2.0 0.5-1.0-2.0	0.1- 0.15- 0.2 0.05- 0.1- 0.15	
Nodular cast iron	270HB	High speed finishing	Continuous Interrupt	HR6115	0.4 0.8	200-300-400 150-200-250	0.05-0.2-0.5 0.2-0.5-1.0	0.03-0.05- 0.1 0.05- 0.1- 0.15	
		Finishing (with high luster)	Continuous Interrupt	HR6115	0.4 0.8	150-200-250 120-150-200	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2	
		Finishing	Continuous Interrupt	HR6115	0.4 0.8	120-150-180 100-120-150	0.2-0.5-1.0 0.2-0.5-1.0	0.05- 0.1- 0.2 0.05- 0.1- 0.2	
		Semi-finishing	Continuous Interrupt	HR6115	0.4 0.8	100-120-150 80- 100- 120	0.5-1.0-2.0 0.5-1.0-2.0	0.05- 0.1- 0.2 0.05- 0.1- 0.15	
N	Non-ferrous metal Copper-copper alloy Aluminum/aluminum alloy (Si < 10%), etc.	100HB	High speed finishing (Iridescence surface luster)	Continuous	HRK10 HRK20	0.4 0.8	200-400-1000	0.05-0.1-0.3	0.05-0.1-0.15
			Finishing	Continuous Interrupt	HRK10 HRK20	0.4 0.8	100-200-400 100-200-400	0.05-0.5-1.0 0.05-0.5-1.0	0.03- 0.1- 0.2 0.03- 0.1- 0.2
S	Titanium alloy	400HB	Precision finishing (Iridescence surface luster)	Continuous Interrupt	HR9105 HR7115	0.4 0.8	100-120-150 70- 100- 120	0.05-0.1-0.3 0.05-0.1-0.3	0.03-0.07- 0.1 0.03-0.07- 0.1
			Finishing	Continuous Interrupt	HR9105 HR7115	0.4 0.8	30- 50- 70 30- 50- 70	0.05-0.5-1.0 0.05-0.5-1.0	0.03- 0.1- 0.2 0.03- 0.1- 0.2
	Heat resistant super alloys	350HB	Finishing	Continuous Interrupt	HR9105 HR7115	0.4 0.8	10- 30- 50 10- 30- 50	0.05-0.5-1.0 0.05-0.5-1.0	0.03- 0.1- 0.2 0.03- 0.1- 0.2
			Finishing	Continuous Interrupt	HR9105 HR7115	0.4 0.8	40- 60- 80 40- 60- 80	0.1-0.3-0.5 0.1-0.3-0.5	0.03-0.05- 0.1 0.03-0.05- 0.1
H	Quenched steel Hardened materials	40-50 HRC	Finishing	Continuous Interrupt	HRK10	0.4 0.8	60- 80- 100 30- 50- 70	0.05-0.3-0.5 0.05-0.3-0.5	0.05-0.08- 0.1 0.05-0.08- 0.1
			Finishing	Continuous Interrupt	HRK10	0.4 0.8	100-140-180 90- 120- 160	0.1-0.2-0.3 0.1-0.2-0.3	0.02-0.07- 0.1 0.02-0.07- 0.1
		Semi-finishing	Continuous	HRK10	0.4 0.8	60-80-100	0.3-0.7-1.0	0.03-0.1-0.15	

Recommended cutting parameters for cermet brand

	Material name	Low carbon steel/ low carbon alloy steel	Middle carbon steel/ middle carbon alloy steel	High carbon alloy steel
	Hardness	≤ 150HB	≤ 250HB	≤ 350HB
HRC10	Vc / (m/min)	100-200-300		100-150-200
	f / (mm/rev)	0.10-0.30		0.05-0.25
HR115C	Vc / (m/min)	200-300-400		180-260-320
	f / (mm/rev)	0.10-0.30		0.05-0.25

Cutting parameters for S-type internal turning

Workpiece material	Hardness	Machining form	L/D≤3		L/D=4		L/D=5		L/D=6	
			Feed (mm/rev)	Cutting depth (mm)	Feed (mm/rev)	Cutting depth (mm)	Feed (mm/rev)	Cutting depth (mm)	Feed (mm/rev)	Cutting depth (mm)
P Carbon steel, alloy steel 45#、42CrMo	HB 180-280	Finishing	0.05-0.1-0.15	<0.2	0.05-0.1-0.15	<0.2				
		semi-finishing	0.15-0.25-0.35	<3.0	0.1-0.15-0.2	<1.5				
M Stainless steel 1Cr18Ni9Ti 0Cr18Ni9	≤ HB220	Finishing	0.05-0.1-0.15	<0.2	0.05-0.1-0.15	<0.2				
		semi-finishing	0.15-0.2-0.25	<2.0	0.1-0.15-0.2	<1.0				
N Aluminum alloy	---	Finishing	0.05-0.1-0.15	<0.2	0.05-0.1-0.15	<0.2	0.05-0.1-0.15	-0.15	0.05-0.1-0.15	<0.1
		semi-finishing	0.05-0.1-0.15	<2.0	0.05-0.1-0.15	<1.5	0.05-0.1-0.15	-1.0	0.05-0.1-0.15	<1.0

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cutting parameters recommendation for general turning chipbreaker (Negative)

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	Fn (mm/rev)	Ap (mm)	
Mild steel (45#, A3etc)	≤180HB	GF	●	HR8105	250-420	0.08-0.36	0.30-2.00	
			●	HR8115	230-400	0.08-0.36	0.30-2.00	
			●	HR8125	215-360	0.08-0.36	0.30-2.00	
			●	HR8225	225-380	0.08-0.36	0.30-2.00	
			●	HR8105	250-420	0.08-0.36	0.30-2.00	
			●	HR8115	230-400	0.08-0.31	0.30-2.00	
			●	HR8125	215-360	0.08-0.31	0.30-2.00	
			●	HR8225	225-380	0.08-0.31	0.30-2.00	
		GC	●	HR8105	230-400	0.10-0.30	0.30-1.50	
			●	HR8115	215-360	0.10-0.30	0.30-1.50	
			●	HR8125	190-355	0.10-0.30	0.30-1.50	
			●	HR8225	205-375	0.10-0.30	0.30-1.50	
			●	HR8105	230-400	0.10-0.25	0.30-1.50	
			●	HR8115	215-360	0.10-0.25	0.30-1.50	
			●	HR8125	190-355	0.10-0.25	0.30-1.50	
			●	HR8225	205-375	0.10-0.25	0.30-1.50	
			⚡	HR8125	190-355	0.10-0.20	0.30-1.50	
			⚡	HR8225	205-375	0.10-0.20	0.30-1.50	
			GQ	●	HR8105	230-400	0.14-0.50	1.00-5.00
				●	HR8115	215-360	0.14-0.50	1.00-5.00
		●		HR8125	190-355	0.14-0.50	1.00-5.00	
		●		HR8225	205-375	0.14-0.50	1.00-5.00	
		●		HR8105	230-400	0.14-0.45	1.00-5.00	
		●		HR8115	215-360	0.14-0.45	1.00-5.00	
		●		HR8125	190-355	0.14-0.45	1.00-5.00	
		●		HR8225	205-375	0.14-0.45	1.00-5.00	
		⚡		HR8125	190-355	0.14-0.40	1.00-5.00	
		⚡		HR8225	205-375	0.14-0.40	1.00-5.00	
		GM		●	HR8105	230-400	0.16-0.55	1.00-5.00
				●	HR8115	215-360	0.16-0.55	1.00-5.00
			●	HR8125	190-355	0.16-0.55	1.00-5.00	
			●	HR8225	205-375	0.16-0.55	1.00-5.00	
			●	HR8105	225-380	0.16-0.50	1.00-5.00	
			●	HR8115	200-380	0.16-0.50	1.00-5.00	
			●	HR8125	185-350	0.16-0.50	1.00-5.00	
			●	HR8225	195-360	0.16-0.50	1.00-5.00	
			⚡	HR8125	185-320	0.16-0.45	1.00-5.00	
			⚡	HR8225	195-360	0.16-0.45	1.00-5.00	

● Stable ● Average ⚡ Tough

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	Fn (mm/rev)	Ap (mm)	
Mild steel (45#, A3etc)	≤180HB	GR	●	HR8115	235-320	0.25-0.60	2.00-7.00	
			●	HR8125	185-295	0.25-0.60	2.00-7.00	
			●	HR8225	195-315	0.25-0.60	2.00-7.00	
			●	HR8115	235-320	0.25-0.55	2.00-7.00	
			●	HR8125	195-315	0.25-0.55	2.00-7.00	
			●	HR8225	185-295	0.25-0.55	2.00-7.00	
			⚡	HR8115	235-320	0.25-0.50	2.00-7.00	
			⚡	HR8125	185-295	0.25-0.50	2.00-7.00	
		GZ	●	HR8105	120-255	0.25-1.00	3.00-12.00	
			●	HR8115	100-200	0.25-1.00	3.00-12.00	
			●	HR8125	100-180	0.25-1.00	3.00-12.00	
			●	HR8225	100-195	0.25-1.00	3.00-12.00	
			●	HR8105	120-255	0.25-0.95	3.00-12.00	
			●	HR8115	100-200	0.25-0.95	3.00-12.00	
			●	HR8125	100-180	0.25-0.95	3.00-12.00	
			●	HR8225	100-195	0.25-0.95	3.00-12.00	
			⚡	HR8115	60-180	0.25-0.90	3.00-12.00	
			⚡	HR8125	60-180	0.25-0.90	3.00-12.00	
			GX	●	HR8105	135-230	0.40-1.20	4.50-13.00
				●	HR8115	135-220	0.40-1.20	4.50-13.00
		●		HR8125	80-140	0.40-1.20	4.50-13.00	
		●		HR8225	80-160	0.40-1.20	4.50-13.00	
		●		HR8105	120-220	0.40-1.15	4.50-13.00	
		●		HR8115	100-180	0.40-1.15	4.50-13.00	
		●		HR8125	100-160	0.40-1.15	4.50-13.00	
		●		HR8225	115-170	0.40-1.15	4.50-13.00	
		⚡		HR8115	60-180	0.40-1.10	4.50-13.00	
		⚡		HR8125	60-160	0.40-1.10	4.50-13.00	
		GF		●	HR8105	250-420	0.08-0.36	0.30-2.00
				●	HR8115	230-400	0.08-0.36	0.30-2.00
			●	HR8125	215-360	0.08-0.36	0.30-2.00	
			●	HR8225	225-380	0.08-0.36	0.30-2.00	
			●	HR8105	250-420	0.08-0.36	0.30-2.00	
			●	HR8115	230-400	0.08-0.31	0.30-2.00	
			●	HR8125	215-360	0.08-0.31	0.30-2.00	
			●	HR8225	225-380	0.08-0.31	0.30-2.00	

● Stable ● Average ⚡ Tough

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cutting parameters recommendation for general turning chipbreaker (Negative)

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	Fn (mm/rev)	Ap (mm)
Carbon steel, alloy steel (40Cr, 42CrMo etc)	180-280HB	GC	●	HR8105	230-400	0.10-0.30	0.30-1.50
			●	HR8115	215-360	0.10-0.30	0.30-1.50
			●	HR8125	190-355	0.10-0.30	0.30-1.50
			●	HR8225	205-375	0.10-0.30	0.30-1.50
			●	HR8105	230-400	0.10-0.25	0.30-1.50
			●	HR8115	215-360	0.10-0.25	0.30-1.50
			●	HR8125	190-355	0.10-0.25	0.30-1.50
			●	HR8225	205-375	0.10-0.25	0.30-1.50
			⚙	HR8125	190-355	0.10-0.20	0.30-1.50
			⚙	HR8225	205-375	0.10-0.20	0.30-1.50
			●	HR8105	230-400	0.14-0.50	1.00-5.00
			●	HR8115	215-360	0.14-0.50	1.00-5.00
		●	HR8125	190-355	0.14-0.50	1.00-5.00	
		●	HR8225	205-375	0.14-0.50	1.00-5.00	
		●	HR8105	230-400	0.14-0.45	1.00-5.00	
		●	HR8115	215-360	0.14-0.45	1.00-5.00	
		●	HR8125	190-355	0.14-0.45	1.00-5.00	
		●	HR8225	205-375	0.14-0.45	1.00-5.00	
		⚙	HR8125	190-355	0.14-0.40	1.00-5.00	
		⚙	HR8225	205-375	0.14-0.40	1.00-5.00	
		●	HR8105	230-400	0.16-0.55	1.00-5.00	
		●	HR8115	215-360	0.16-0.55	1.00-5.00	
		●	HR8125	190-355	0.16-0.55	1.00-5.00	
		●	HR8225	205-375	0.16-0.55	1.00-5.00	
		●	HR8105	225-430	0.16-0.50	1.00-5.00	
		●	HR8115	200-405	0.16-0.50	1.00-5.00	
		●	HR8125	185-350	0.16-0.50	1.00-5.00	
		●	HR8225	195-360	0.16-0.50	1.00-5.00	
		⚙	HR8125	185-350	0.16-0.45	1.00-5.00	
		⚙	HR8225	195-360	0.16-0.45	1.00-5.00	
		●	HR8115	235-320	0.25-0.60	2.00-7.00	
		●	HR8125	195-315	0.25-0.60	2.00-7.00	
		●	HR8225	185-295	0.25-0.60	2.00-7.00	
		●	HR8115	235-320	0.25-0.55	2.00-7.00	
		●	HR8125	195-315	0.25-0.55	2.00-7.00	
		●	HR8225	185-295	0.25-0.55	2.00-7.00	
⚙	HR8115	235-320	0.25-0.50	2.00-7.00			
⚙	HR8125	195-315	0.25-0.50	2.00-7.00			
⚙	HR8225	185-295	0.25-0.50	2.00-7.00			

● Stable ● Average ⚙ Tough

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	Fn (mm/rev)	Ap (mm)
Carbon steel, alloy steel (40Cr, 42CrMo etc)	180-280HB	GZ	●	HR8105	120-255	0.25-1.00	3.00-12.00
			●	HR8115	100-200	0.25-1.00	3.00-12.00
			●	HR8125	100-180	0.25-1.00	3.00-12.00
			●	HR8225	100-195	0.25-1.00	3.00-12.00
			●	HR8105	120-255	0.25-0.95	3.00-12.00
			●	HR8115	100-200	0.25-0.95	3.00-12.00
			●	HR8125	100-180	0.25-0.95	3.00-12.00
			●	HR8225	100-195	0.25-0.95	3.00-12.00
			⚙	HR8115	60-180	0.25-0.90	3.00-12.00
			⚙	HR8125	60-180	0.25-0.90	3.00-12.00
			●	HR8105	135-230	0.40-1.20	4.50-13.00
			●	HR8115	135-220	0.40-1.20	4.50-13.00
		●	HR8125	80-140	0.40-1.20	4.50-13.00	
		●	HR8225	80-160	0.40-1.20	4.50-13.00	
		●	HR8105	120-220	0.40-1.15	4.50-13.00	
		●	HR8115	100-180	0.40-1.15	4.50-13.00	
		●	HR8125	100-160	0.40-1.15	4.50-13.00	
		●	HR8225	115-170	0.40-1.15	4.50-13.00	
		⚙	HR8115	60-180	0.40-1.10	4.50-13.00	
		⚙	HR8125	60-160	0.40-1.10	4.50-13.00	
		⚙	HR8225	60-170	0.40-1.10	4.50-13.00	
		●	HR8105	230-400	0.10-0.40	0.30-2.00	
		●	HR8115	210-380	0.10-0.40	0.30-2.00	
		●	HR8105	230-380	0.10-0.35	0.30-2.00	
		●	HR8115	210-360	0.10-0.35	0.30-2.00	
		●	HR8105	215-380	0.10-0.30	0.30-1.50	
		●	HR8115	190-360	0.10-0.30	0.30-1.50	
		●	HR8105	215-400	0.10-0.25	0.30-1.50	
		●	HR8115	190-380	0.10-0.25	0.30-1.50	
		●	HR8105	220-400	0.20-0.60	0.90-4.00	
		●	HR8115	205-380	0.20-0.60	0.90-4.00	
		●	HR8105	220-380	0.20-0.55	0.90-4.00	
		●	HR8115	205-360	0.20-0.55	0.90-4.00	
		●	HR8105	220-400	0.20-0.55	1.00-4.00	
		●	HR8115	205-380	0.20-0.55	1.00-4.00	
		●	HR8105	220-380	0.20-0.50	1.00-4.00	
●	HR8115	205-360	0.20-0.50	1.00-4.00			

● Stable ● Average ⚙ Tough

Cutting parameters recommendation for general turning chipbreaker (Negative)

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	Fn (mm/rev)	Ap (mm)		
Carbon steel, alloy steel (quenching material, etc)	≥280HB	GR	●	HR8115	225-360	0.25-0.60	1.50-6.00		
			●	HR8225	225-340	0.25-0.55	1.50-6.00		
		GZ	●	HR8115	120-245	0.50-1.26	3.00-11.00		
			●	HR8225	100-190	0.50-1.26	3.00-11.00		
			●	HR8115	110-245	0.50-1.21	3.00-11.00		
			●	HR8225	90-190	0.50-1.21	3.00-11.00		
		GX	●	HR8115	120-220	0.70-1.30	4.00-12.00		
			●	HR8225	120-210	0.70-1.30	4.00-12.00		
			●	HR8115	80-220	0.70-1.25	4.00-12.00		
			●	HR8225	80-210	0.70-1.25	4.00-12.00		
		Austenitic stainless steel (SUS304, SUS316etc)	≤200HB	BF	●	HR7125	95-185	0.08-0.30	0.20-2.00
					●	HR7225	95-185	0.08-0.30	0.20-2.00
●	HR7125				95-185	0.08-0.25	0.20-2.00		
●	HR7225				95-185	0.08-0.25	0.20-2.00		
BM	●			HR7125	90-170	0.10-0.52	1.00-5.80		
	●			HR7225	90-170	0.10-0.52	1.00-5.80		
	●			HR7125	90-170	0.10-0.47	1.00-5.80		
	●			HR7225	90-170	0.10-0.47	1.00-5.80		
	⚡			HR7125	90-170	0.10-0.42	1.00-5.80		
	⚡			HR7225	90-170	0.10-0.42	1.00-5.80		
BR	●			HR7125	80-150	0.18-0.66	1.70-7.00		
	●			HR7225	80-150	0.18-0.66	1.70-7.00		
	●			HR7125	80-150	0.18-0.61	1.70-7.00		
	●			HR7225	80-150	0.18-0.61	1.70-7.00		
	⚡			HR7125	80-150	0.18-0.56	1.70-7.00		
	⚡			HR7225	80-150	0.18-0.56	1.70-7.00		
Martensitic stainless steel (SUS431, SUS420etc)	>200HB			BF	●	HR7225	85-175	0.08-0.30	0.20-2.00
					●	HR7225	85-175	0.08-0.25	0.20-2.00
		BM	●	HR7225	80-160	0.10-0.52	1.00-5.80		
			●	HR7225	80-160	0.10-0.47	1.00-5.80		
			⚡	HR7225	80-160	0.10-0.42	1.00-5.80		
		BR	●	HR7225	70-140	0.18-0.66	1.70-7.00		
			●	HR7225	70-140	0.18-0.61	1.70-7.00		
			⚡	HR7225	70-140	0.18-0.56	1.70-7.00		

● Stable ● Average ⚡ Tough

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	Fn (mm/rev)	Ap (mm)
Grey cast iron (HT200, Ht300etc)	≤350MPa	no	●	HR6115	155-285	0.20-0.60	2.50-6.00
			●	HR6115	155-285	0.20-0.55	2.50-6.00
			⚡	HR6115	155-285	0.20-0.50	2.50-6.00
		All round	●	HR6115	165-300	0.25-0.60	1.60-5.00
			●	HR6115	165-300	0.25-0.55	1.60-5.00
			⚡	HR6115	165-300	0.25-0.50	1.60-5.00
Nodular cast iron (QT400, Qt500etc)	≤450MPa	no	●	HR6115	145-270	0.20-0.60	2.50-6.00
			●	HR6115	145-270	0.20-0.55	2.50-6.00
			⚡	HR6115	145-270	0.20-0.50	2.50-6.00
		All round	●	HR6115	155-285	0.25-0.60	1.60-5.00
			●	HR6115	155-285	0.25-0.55	1.60-5.00
			⚡	HR6115	155-285	0.25-0.50	1.60-5.00
Heat-resistance alloy (Gh4169etc)	---	SM	●	HR7115	30-70	0.15-0.40	0.70-3.00
			●	HR9105	40-80	0.15-0.40	0.70-3.00
			●	HR7115	30-70	0.15-0.35	0.70-3.00
			●	HR9105	40-80	0.15-0.35	0.70-3.00
			⚡	HR7115	30-70	0.15-0.30	0.70-3.00
			⚡	HR9105	40-80	0.15-0.30	0.70-3.00

● Stable ● Average ⚡ Tough

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A93

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A94

Cutting parameters recommendation for general turning chipbreaker (Positive)

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	F _n (mm/rev)	A _p (mm)		
Mild steel (45#, A3etc)	≤180HB	TF	●	HR8105	250-425	0.10-0.30	0.30-2.00		
			●	HR8115	230-355	0.10-0.30	0.30-2.00		
			●	HR8125	225-320	0.10-0.30	0.30-2.00		
			●	HR8225	220-310	0.10-0.30	0.30-2.00		
			●	HR8105	250-425	0.10-0.25	0.30-2.00		
			●	HR8115	230-355	0.10-0.25	0.30-2.00		
			●	HR8125	225-320	0.10-0.25	0.30-2.00		
			●	HR8225	220-310	0.10-0.25	0.30-2.00		
			●	HR8105	230-440	0.15-0.35	0.50-3.00		
		●	HR8115	215-415	0.15-0.35	0.50-3.00			
		●	HR8125	190-355	0.15-0.35	0.50-3.00			
		●	HR8225	205-375	0.15-0.35	0.50-3.00			
		●	HR8105	225-430	0.15-0.30	0.50-3.00			
		●	HR8115	200-405	0.15-0.30	0.50-3.00			
		●	HR8125	185-350	0.15-0.30	0.50-3.00			
		●	HR8225	195-360	0.15-0.30	0.50-3.00			
		Carbon steel, alloy steel (40Cr, 42CrMoetc)	180-280HB	TF	●	HR8105	250-480	0.10-0.30	0.30-2.00
					●	HR8115	230-440	0.10-0.30	0.30-2.00
●	HR8125				215-415	0.10-0.30	0.30-2.00		
●	HR8225				225-410	0.10-0.30	0.30-2.00		
●	HR8105				250-480	0.10-0.25	0.30-2.00		
●	HR8115				230-440	0.10-0.25	0.30-2.00		
●	HR8125				215-415	0.10-0.25	0.30-2.00		
●	HR8225				225-410	0.10-0.25	0.30-2.00		
●	HR8105				230-440	0.15-0.35	0.50-3.00		
●	HR8115			215-415	0.15-0.35	0.50-3.00			
●	HR8125			190-355	0.15-0.35	0.50-3.00			
●	HR8225			205-375	0.15-0.35	0.50-3.00			
●	HR8105			225-430	0.15-0.30	0.50-3.00			
●	HR8115			200-405	0.15-0.30	0.50-3.00			
●	HR8125			185-350	0.15-0.30	0.50-3.00			
●	HR8225			195-360	0.15-0.30	0.50-3.00			
●	HR8125			185-350	0.15-0.25	0.50-3.00			
●	HR8225			195-360	0.15-0.25	0.50-3.00			

● Stable ● Average ■ Tough

Workpiece material	Hardness	Chipbreaker	Cutting range	Grade	Cuttingspeed (m/min)	F _n (mm/rev)	A _p (mm)
Carbon steel, alloy steel (quenching material, etc)	≥280HB	TF	●	HR8115	230-460	0.10-0.30	0.30-2.00
			●	HR8225	210-420	0.10-0.30	0.30-2.00
			●	HR8115	230-460	0.10-0.25	0.30-2.00
			●	HR8225	210-420	0.10-0.25	0.30-2.00
		TM	●	HR8115	215-420	0.15-0.35	0.50-3.00
			●	HR8225	190-395	0.15-0.35	0.50-3.00
			●	HR8115	215-420	0.15-0.30	0.50-3.00
			●	HR8225	190-395	0.15-0.30	0.50-3.00
			●	HR8225	190-395	0.15-0.30	0.50-3.00
Austenitic stainless steel (SUS304, SUS316 etc)	≤200HB	TF	●	HR7125	95-185	0.10-0.30	0.30-2.00
			●	HR7225	95-185	0.10-0.30	0.30-2.00
			●	HR7125	95-185	0.10-0.25	0.30-2.00
			●	HR7225	95-185	0.10-0.25	0.30-2.00
		TM	●	HR7125	80-150	0.15-0.35	0.50-3.00
			●	HR7225	80-150	0.15-0.35	0.50-3.00
			●	HR7125	80-150	0.15-0.30	0.50-3.00
			●	HR7225	80-150	0.15-0.30	0.50-3.00
			●	HR7125	80-150	0.15-0.25	0.50-3.00
			●	HR7225	80-150	0.15-0.25	0.50-3.00
			●	HR7125	85-175	0.10-0.30	0.30-2.00
			●	HR7225	85-175	0.10-0.30	0.30-2.00
Martensitic stainless steel (SUS431, SUS420 etc)	>200HB	TF	●	HR7125	85-175	0.10-0.30	0.30-2.00
			●	HR7225	85-175	0.10-0.30	0.30-2.00
			●	HR7125	85-175	0.10-0.25	0.30-2.00
			●	HR7225	85-175	0.10-0.25	0.30-2.00
		TM	●	HR7125	70-140	0.15-0.35	0.50-3.00
			●	HR7225	70-140	0.15-0.35	0.50-3.00
			●	HR7125	70-140	0.15-0.30	0.50-3.00
			●	HR7225	70-140	0.15-0.30	0.50-3.00
			●	HR7125	70-140	0.15-0.25	0.50-3.00
			●	HR7225	70-140	0.15-0.25	0.50-3.00
			●	HRK10	300-700	0.10-0.30	0.50-3.00
			●	HRK20	300-700	0.10-0.30	0.50-3.00
Non-ferrous metal (aluminum alloy)	---	AK	●	HRK10	300-700	0.10-0.25	0.50-3.00
			●	HRK20	300-700	0.10-0.25	0.50-3.00
			●	HRK10	300-700	0.10-0.20	0.50-3.00
			●	HRK20	300-700	0.10-0.20	0.50-3.00
			●	HRK10	300-700	0.10-0.20	0.50-3.00
			●	HRK20	300-700	0.10-0.20	0.50-3.00

● Stable ● Average ■ Tough

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A95

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

A96

Comparison table of chipbreaker for general turning

ISO	application	Huareal	SANDVIK	KENAMETAL	ISCAR	MITSUBISHI	HITACHI	KYOCERA	SUMIYOMO	TAGUTEC	ZCC.CT
P	Finishing (Negative)	GF GC	LC XF MF	PMFN CT	---- NF	SA SY SH	BE CE B BH	PP XQ CQ HQ	LU FE SU	FG FC	DF PF SF
	Semi-finish (Negative)	GQ GM	XM, QM PMC, PM SM, KM HM	P, MG MN MP1	GN RF, LF	MA MV MH MP	AH AE AY	HS, PS PQ, GS PT, PG	GU(UG) GE UX	ML MP MC PC MT	DM PM
	Tough machining (Negative)	GR	PR, XMR KR	RP RN	M3P, NR ----	RP GH MAS MT	RE AR ----	HT GT PH ----	MU ME MX	RT ----	DR LR
	Heavy Machining (Negative)	GZ GX	QR HR, SR ---- MR	RM, MR RH ----	NM TNM ---- R3P	HZ, HX HL, HH HXD HR HV HCS	TE, UE ---- H HX, HE	PX ---- ---- ----	HG HP HU HW HF	RX RH HT HD HY HZ	HDR HPR
	Finishing (Positive)	TF	MM, XM VM	MF	SM, 14	LM, SV	JQ	MQ	GU	FC PC	HF
	Semi-finish (Positive)	TM	UM, PM MX, PR	MF MP	----	MV MP	JE	HQ XQ GK	MU	MT PC	HM
M	Finishing (Negative)	BF	MF	FP, FS LF	----	LM SH	SE, MP	MQ GU	SU EF	EA SF	EF
	Semi-finish (Negative)	BM	MM, MMC SMR	MP	M3M, PP	MM	DE	----	GU	ET	EM
	Tough machining (Negative)	BR	---- MR, MRR	UP ----	---- MR	ES, 1M 2M, HL RM, GH HM	---- ----	---- TK	HM EM MU	VF SU	ER
	Finishing (Positive)	TF	MM, XM VM	FP, FF	SM, 14	LM, FM	MP	CF, MQ CK	FC	FC PC	FF
	Semi-finish (Positive)	TM	MM	MP	----	MW	----	HQ GK	MU	----	EM
K	Semi-finish (Negative)	All round	KF	UN	GN	LK MA MK	V, VA	C	UZ	MT	All round
	Tough machining (Negative)	Flat	KM, KR KRR	----	----	GK RK GH	Y, RE	ZS, GC	GZ(UX)	RT	----
N	Non-ferrous metal machining	AK	----	MS	----	----	----	AH	AX	----	no
S	Finishing (Negative)	----	SF, SGF	----	----	LS FJ	----	----	EF	----	NF NGF
	Semi-finish (Negative)	SM	SM, SMC	----	----	MS MJ	VI	----	EG, EX	----	NM
H	Finishing	----	----	----	----	----	----	----	FV*	----	no
	Semi-finish	----	----	----	----	----	----	----	GH	----	no

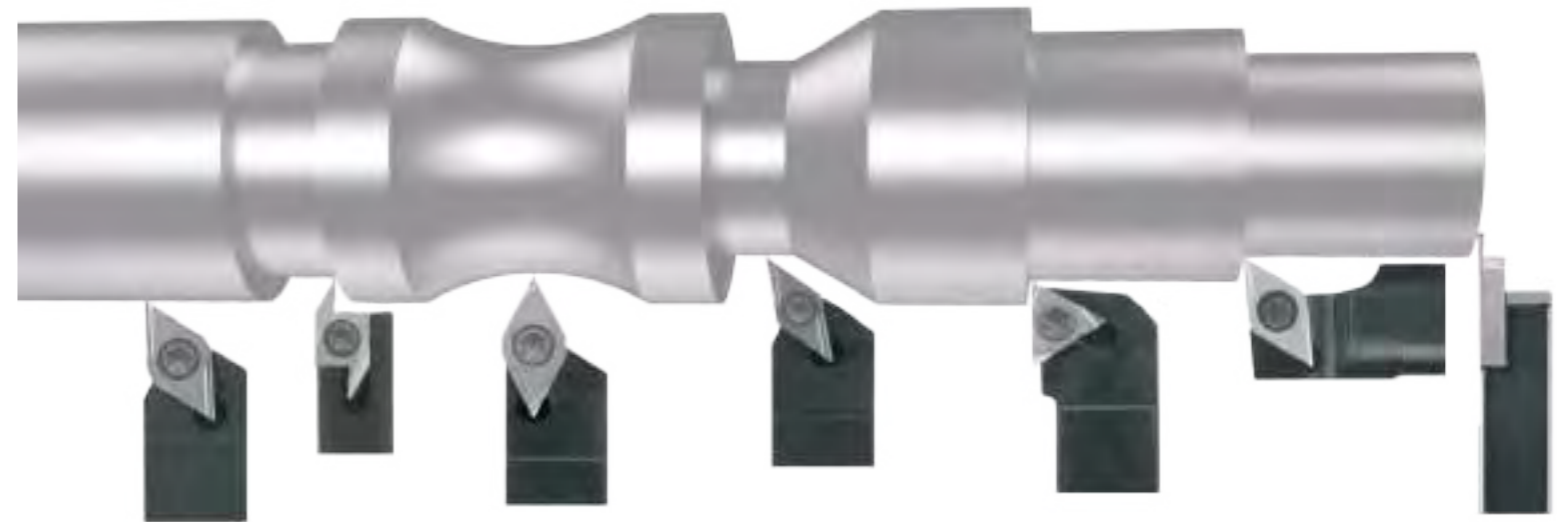

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

Turning of small components

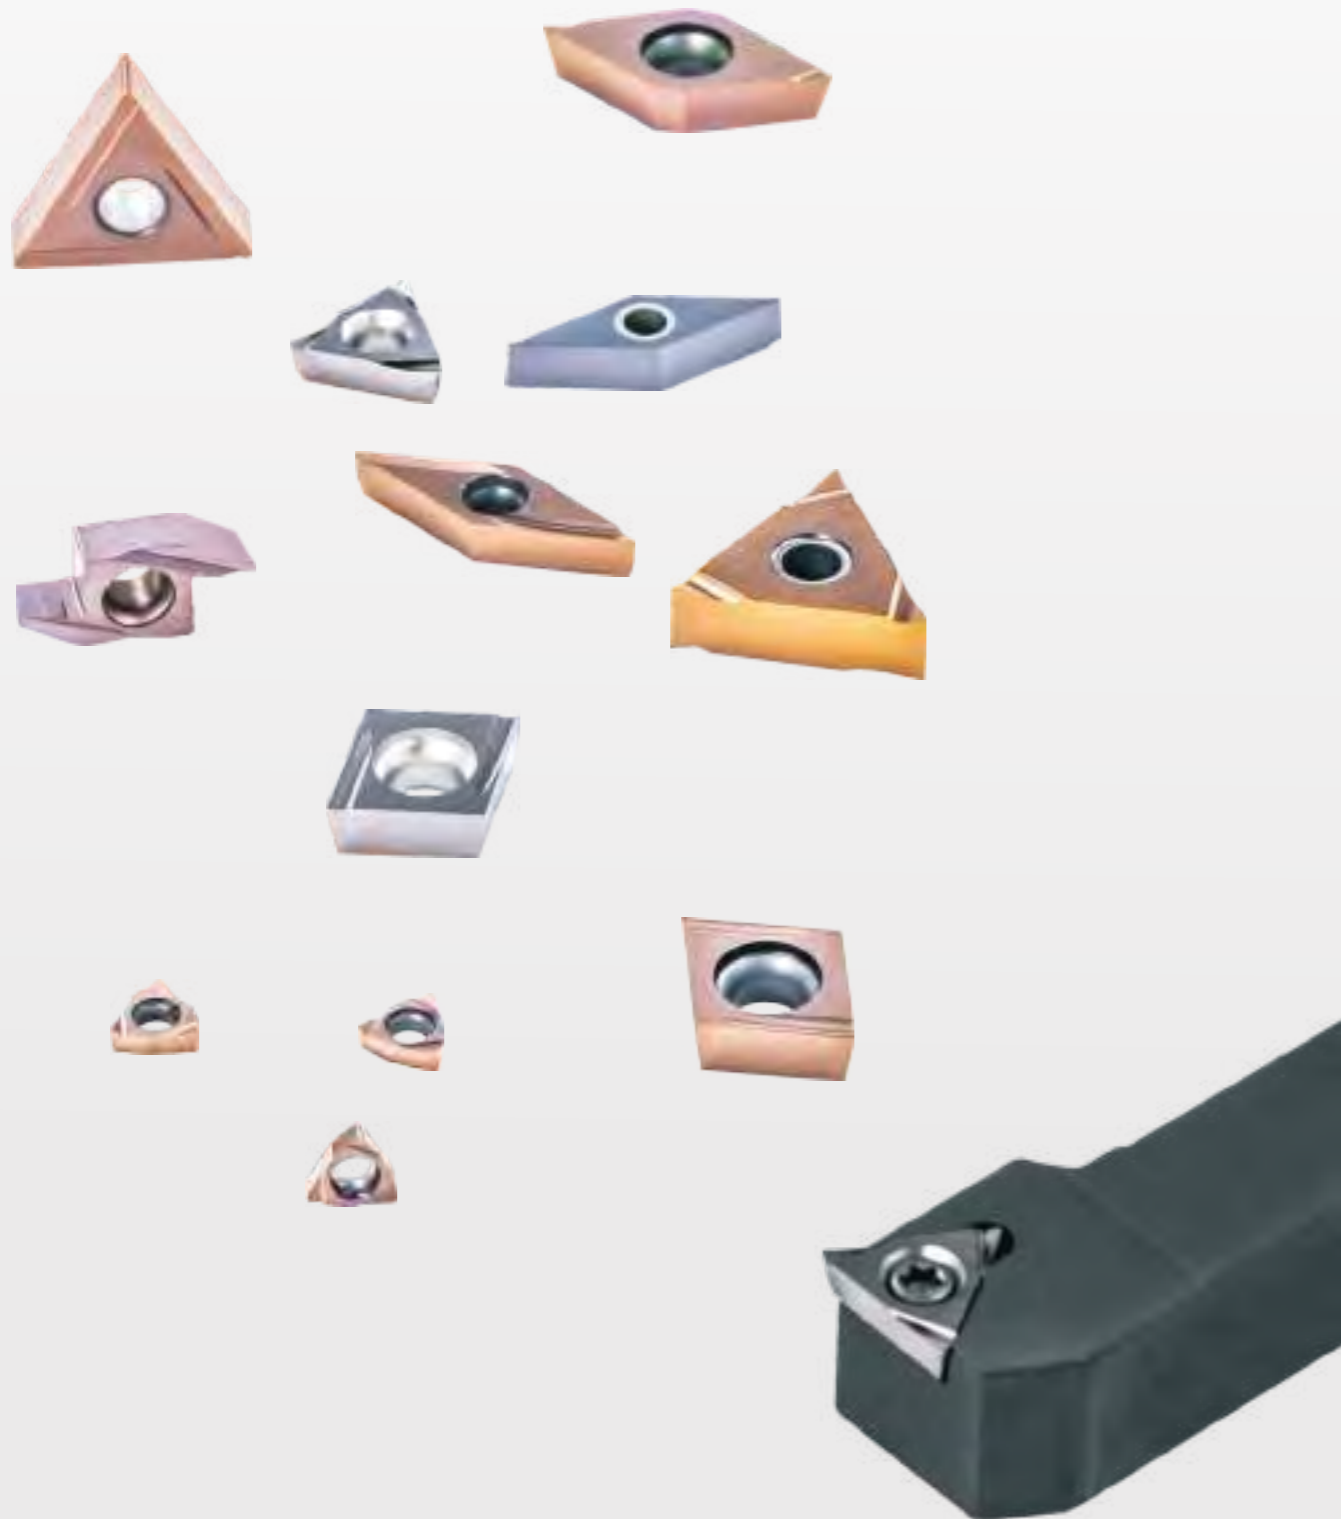

Turning

Turning of small components

- ◆ Small components turning application A-101
- ◆ Small components turning grade overview A-102
- ◆ Small components turning insert overview A-103
- ◆ Small components parts turning insert A-107
- ◆ Back turning insert code key A-119
- ◆ Cody key of external turning tools for small components A-120
- ◆ Cody key of internal turning tools for small components A-121
- ◆ Turning of small components A-122
- ◆ Shallow groove insert code key A-130
- ◆ Shallow groove tools code key A-130
- ◆ Shallow groove turning insert shallow groove tools A-131
- ◆ Shallow groove insert customization form A-137
- ◆ Recommended cutting parameters for shallow groove insert A-139
- ◆ Parting & grooving insert code key for small components A-140
- ◆ Parting & grooving tool code key for small components A-140

Small components turning application

Type	Material	ISO	PVD		Cemented Carbide	Cermet	Coated Cermet	ISO
			HR1135	HR7125	HRK10	HRC10	HR115C	
P	Unalloyed steel/Alloyed steel	P05	HR1135			HRC10	HR115C	P05
		P15		HR7125				P15
		P25						P25
		P35						P35
M	Stainless steel	M05	HR1135					M05
		M15		HR7125				M15
		M25						M25
		M35						M35
K	Cast iron	K05						K05
		K15			HRK10			K15
		K25						K25
		K35						K35
N	Aluminum/Aluminum alloy	N05			HRK10			N05
		N15						N15
		N25						N25
		N35						N35
S	Heat resistant super alloys Titanium alloy	S05						S05
		S15		HR7125				S15
		S25						S25
		S35						S35
H	Hardened steel	H05						H05
		H15	HR1135					H15
		H25						H25
		H35						H35

Small components turning grade overview

Grade	Type	Features	Application
HR1135	PVD coating Carbide	The fine-grain cemented carbide matrix with the new nano-gradient composite structural coating has excellent wear resistance and build-up edge resistance, ensuring the stability of the insert life and the high quality of the machined surface.	High wear resistance grade, suitable for high cutting speed turning of small part
HR7125	PVD coating Carbide	Unique coating materials combined with new coating technology, the surface of product is smooth, with low friction coefficient, high nano hardness, and excellent antioxidant performance.	Preferred grade for precision small part turning. Great versatility
HRC10	Cermet	Newly upgraded cermet grade, hard and compact surface with good chemical stability and adhesion resistance. Also great wear resistance and chipping resistance, insert consistency, excellent machining surface quality.	Good consistency, especially suitable for low carbon steel finishing turning, as well as the workpiece surface quality has high requirements
HR115C	Coated Cermet	The coated cermet grade, with a new nano gradient composite structure coating, further improves the wear resistance, high temperature resistance, the unique transition layer treatment technology effectively improves the adhesion between the coating and the substrate, reduces the friction coefficient between the insert and workpiece. Insert services life and stability are outstanding	Better high temperature resistance suitable for higher cutting speed working condition compared to cermet grades.
HRK10	Carbide	Non-coated cemented carbide, fine matrix material, uniform particle size, high bending strength, good wear resistance, stable overall performance.	Preferred grade for turning on aluminum alloy

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Small components turning insert overview(Negative)

Type	Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	80° C-type	55° D-type	90° S-type	60° T-type	35° V-type	80° W-type
Negative	Ultra finishing	G	XS	<ul style="list-style-type: none"> Sloped chipbreaker design, stable control of chip removal direction, ensure smooth cutting. Sharp cutting edge, can effectively reduce cutting force. Achieve excellent cutting results. 						 A107		
	Finishing	G	PB	<ul style="list-style-type: none"> Design of cutting inclination angle can well control chip removal direction and reduce cutting force. The high strength of cutting corner makes it more suitable for machining with a feed rate of 0.15-0.25mm/r. 						 A107		

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Small components turning insert overview(Postive)

Type	Usage	Tolerance	Chipbreaker	Features	Chipbreaker diagram	Sectional view of chipbreaker	80° C-type	55° D-type	90° S-type	60° T-type	35° V-type	80° W-type
Positive insert	Ultra finishing	G	XF	<ul style="list-style-type: none"> Inclined chipbreaker design, stable control of chip removal direction, ensure smooth cutting. Sharp cutting edge, can effectively reduce cutting force. Achieve a excellent cutting results. 								
			No code name	<ul style="list-style-type: none"> Design of cutting incination angle can well control chip removal direction and reduce cutting force. Even cutting edge width design, sharp edge, machining workpiece surface quality is excellent. 								
	Finishing	G	PU	<ul style="list-style-type: none"> The design of small groove width and small chip up-curl radius can meet the requirements of chip breaking under the condition of small cutting depth. 								
			PY	<ul style="list-style-type: none"> The design of small groove width and small chip up-curl radius can meet the requirements of chip breaking under the condition of small cutting depth. 								
			PJ	<ul style="list-style-type: none"> Can adapt to low feed rate and low cutting depth change, stable control cutting. 								
Back turning	Back turning		HBS	<ul style="list-style-type: none"> The specially designed insert shape meets the requirements of back turning machining during the small part machining. The special chipbreaker structure design can stably control the direction of chip removal and reduce cutting resistance. 								

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

Short hole drill

Solid carbide drill

A105

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill


Short hole drill

Solid carbide drill

A106

A

Negative insert

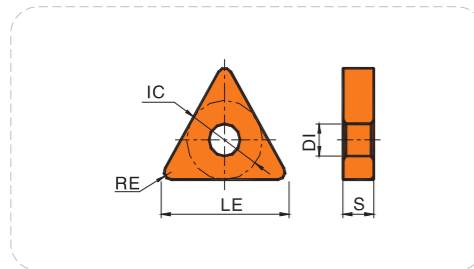


Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P Steel	● ● ●	● ● ●	● ● ●	● ●	● ●
M Stainless steel	● ● ●	● ● ●	● ● ●	● ●	● ●
K Cast iron	● ● ●	● ● ●	● ● ●	● ●	● ●
N Non-ferrous metal	● ● ●	● ● ●	● ● ●	● ●	● ●
S Heat resistant super alloys Titanium alloy	● ● ●	● ● ●	● ● ●	● ●	● ●

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermet		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C	
Ultra finishing		TNGG160402R-XS	16.5	9.525	4.76	3.81	0.2	★	★		☆		STLN***-16 Page(A122)
		TNGG160402L-XS	16.5	9.525	4.76	3.81	0.2	★	★		☆		
		TNGG160404R-XS	16.5	9.525	4.76	3.81	0.4	★	★		☆		
		TNGG160404L-XS	16.5	9.525	4.76	3.81	0.4	★	★		☆		
		TNGG160408R-XS	16.5	9.525	4.76	3.81	0.8	★	★		☆		
		TNGG160408L-XS	16.5	9.525	4.76	3.81	0.8	★	★		☆		
Finishing		TNGG160402R-PB	16.5	9.525	4.76	3.81	0.2	★	★		☆		STLN***-16 Page(A122)
		TNGG160402L-PB	16.5	9.525	4.76	3.81	0.2	★	★		☆		
		TNGG160404R-PB	16.5	9.525	4.76	3.81	0.4	★	★		☆		
		TNGG160404L-PB	16.5	9.525	4.76	3.81	0.4	★	★		☆		
		TNGG160408R-PB	16.5	9.525	4.76	3.81	0.8	★	★		☆		
		TNGG160408L-PB	16.5	9.525	4.76	3.81	0.8	★	★		☆		

★ Recommended grade ☆ Available grade

Positive insert

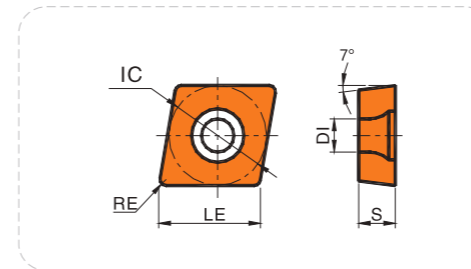

Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P Steel	● ● ●	● ● ●	● ● ●	● ●	● ●
M Stainless steel	● ● ●	● ● ●	● ● ●	● ●	● ●
K Cast iron	● ● ●	● ● ●	● ● ●	● ●	● ●
N Non-ferrous metal	● ● ●	● ● ●	● ● ●	● ●	● ●
S Heat resistant super alloys Titanium alloy	● ● ●	● ● ●	● ● ●	● ●	● ●

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermet		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C	
Ultra finishing		CCGT0301005R-XF	3.6	3.5	1.4	1.9	0.05	★	★		☆		SCLC***-03 Page(A122) S-SCLC***-03 Page(A126)
		CCGT0301005L-XF	3.6	3.5	1.4	1.9	0.05	★	★		☆		
		CCGT030101R-XF	3.6	3.5	1.4	1.9	0.1	★	★		☆		
		CCGT030101L-XF	3.6	3.5	1.4	1.9	0.1	★	★		☆		
		CCGT030102R-XF	3.6	3.5	1.4	1.9	0.2	★	★		☆		
		CCGT030102L-XF	3.6	3.5	1.4	1.9	0.2	★	★		☆		
		CCGT030104R-XF	3.6	3.5	1.4	1.9	0.4	★	★		☆		
		CCGT030104L-XF	3.6	3.5	1.4	1.9	0.4	★	★		☆		
		CCGT0401005R-XF	4.4	4.3	1.8	2.3	0.05	★	★		☆		SCLC***-04 Page(A122) S-SCLC***-04 Page(A126)
		CCGT0401005L-XF	4.4	4.3	1.8	2.3	0.05	★	★		☆		
		CCGT040101R-XF	4.4	4.3	1.8	2.3	0.1	★	★		☆		
		CCGT040101L-XF	4.4	4.3	1.8	2.3	0.1	★	★		☆		
		CCGT040102R-XF	4.4	4.3	1.8	2.3	0.2	★	★		☆		
		CCGT040102L-XF	4.4	4.3	1.8	2.3	0.2	★	★		☆		
		CCGT040104R-XF	4.4	4.3	1.8	2.3	0.4	★	★		☆		
		CCGT040104L-XF	4.4	4.3	1.8	2.3	0.4	★	★		☆		
		CCGT060201R-XF	6.4	6.35	2.38	2.8	0.1	★	★		☆		SCLC***-06 Page(A122) S-SCLC***-06 Page(A126)
		CCGT060201L-XF	6.4	6.35	2.38	2.8	0.1	★	★		☆		
		CCGT060202R-XF	6.4	6.35	2.38	2.8	0.2	★	★		☆		
		CCGT060202L-XF	6.4	6.35	2.38	2.8	0.2	★	★		☆		
		CCGT060204R-XF	6.4	6.35	2.38	2.8	0.4	★	★		☆		
		CCGT060204L-XF	6.4	6.35	2.38	2.8	0.4	★	★		☆		


★ Recommended grade ☆ Available grade

A

General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

A

Positive insert

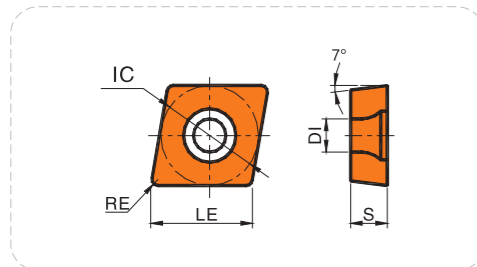


Working condition: ● Stable ● Average ■ Tough

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy	PVD					Cemented carbide		Cermet	
						HR1135	HR7125	HRK10	HRC10	HR115C				
P Steel	●	●	●			●	●					●	●	
M Stainless steel	●	●	●											
K Cast iron														
N Non-ferrous metal								●	●					
S Heat resistant super alloys Titanium alloy	●	●												

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide		Cermet		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
Ultra finishing		CCGT09T301R-XF	9.7	9.525	3.97	4.4	0.1	★	★			☆		SCLC***-09 Page(A122) S-SCLC***-09 Page(A126)
		CCGT09T301L-XF	9.7	9.525	3.97	4.4	0.1	★	★			☆		
		CCGT09T302R-XF	9.7	9.525	3.97	4.4	0.2	★	★			☆		
		CCGT09T302L-XF	9.7	9.525	3.97	4.4	0.2	★	★			☆		
		CCGT09T304R-XF	9.7	9.525	3.97	4.4	0.4	★	★			☆		
		CCGT09T304L-XF	9.7	9.525	3.97	4.4	0.4	★	★			☆		

★ Recommended grade ☆ Available grade

Positive insert

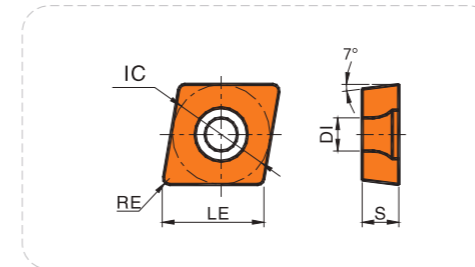

Working condition: ● Stable ● Average ■ Tough

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy	PVD					Cemented carbide		Cermet	
						HR1135	HR7125	HRK10	HRC10	HR115C				
P Steel	●	●	●			●	●					●	●	
M Stainless steel	●	●	●											
K Cast iron														
N Non-ferrous metal								●	●					
S Heat resistant super alloys Titanium alloy	●	●												

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide		Cermet		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
Finishing		CCGT0602005FR-PU	6.4	6.35	2.38	2.8	0.05	★	★			☆		SCLC***-06 Page(A122) S-SCLC***-06 Page(A126)
		CCGT0602005FL-PU	6.4	6.35	2.38	2.8	0.05	★	★			☆		
		CCGT060201FR-PU	6.4	6.35	2.38	2.8	0.1	★	★			☆		
		CCGT060201FL-PU	6.4	6.35	2.38	2.8	0.1	★	★			☆		
		CCGT060202FR-PU	6.4	6.35	2.38	2.8	0.2	★	★			☆		
		CCGT060202FL-PU	6.4	6.35	2.38	2.8	0.2	★	★			☆		
		CCGT060204FR-PU	6.4	6.35	2.38	2.8	0.4	★	★			☆		SCLC***-06 Page(A122) S-SCLC***-06 Page(A126)
		CCGT060204FL-PU	6.4	6.35	2.38	2.8	0.4	★	★			☆		
		CCGT09T3005FR-PU	9.7	9.525	3.97	4.4	0.05	★	★			☆		
		CCGT09T3005FL-PU	9.7	9.525	3.97	4.4	0.05	★	★			☆		
		CCGT09T301FR-PU	9.7	9.525	3.97	4.4	0.1	★	★			☆		
		CCGT09T301FL-PU	9.7	9.525	3.97	4.4	0.1	★	★			☆		
		CCGT09T302FR-PU	9.7	9.525	3.97	4.4	0.2	★	★			☆		SCLC***-09 Page(A122) S-SCLC***-09 Page(A126)
		CCGT09T302FL-PU	9.7	9.525	3.97	4.4	0.2	★	★			☆		
		CCGT09T304FR-PU	9.7	9.525	3.97	4.4	0.4	★	★			☆		
		CCGT09T304FL-PU	9.7	9.525	3.97	4.4	0.4	★	★			☆		
		CCGT060201R-PU	6.4	6.35	2.38	2.8	0.1	★	★			☆		
		CCGT060201L-PU	6.4	6.35	2.38	2.8	0.1	★	★			☆		
		CCGT060202R-PU	6.4	6.35	2.38	2.8	0.2	★	★			☆		SCLC***-06 Page(A122) S-SCLC***-06 Page(A126)
		CCGT060202L-PU	6.4	6.35	2.38	2.8	0.2	★	★			☆		
		CCGT060204R-PU	6.4	6.35	2.38	2.8	0.4	★	★			☆		
		CCGT060204L-PU	6.4	6.35	2.38	2.8	0.4	★	★			☆		
		CCGT09T301R-PU	9.7	9.525	3.97	4.4	0.1	★	★			☆		
		CCGT09T301L-PU	9.7	9.525	3.97	4.4	0.1	★	★			☆		
		CCGT09T302R-PU	9.7	9.525	3.97	4.4	0.2	★	★			☆		SCLC***-09 Page(A122) S-SCLC***-09 Page(A126)
		CCGT09T302L-PU	9.7	9.525	3.97	4.4	0.2	★	★			☆		
		CCGT09T304R-PU	9.7	9.525	3.97	4.4	0.4	★	★			☆		
		CCGT09T304L-PU	9.7	9.525	3.97	4.4	0.4	★	★			☆		
		CCGT09T304R-PU	9.7	9.525	3.97	4.4	0.4	★	★			☆		
		CCGT09T304L-PU	9.7	9.525	3.97	4.4	0.4	★	★			☆		

★ Recommended grade ☆ Available grade

A

General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

A110

A109

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

Positive insert

Working condition: ● Stable ● Average ❏ Tough

Processing	Insert shape	Type	Dimension (mm)					Workpiece material					Applicable tool
			LE	IC	S	DI	RE	PVD		Cemented carbide	Cermet		
			HR1135	HR7125	HRK10	HRC10	HR115C						
Ultra finishing		DCGT0702005R-XF	7.8	6.35	2.38	2.8	0.05	★	★		☆		SDJC**--07 SDNC**--07 Page(A123) S-SDUC**--07 Page(A127)
		DCGT0702005L-XF	7.8	6.35	2.38	2.8	0.05	★	★		☆		
		DCGT070201R-XF	7.8	6.35	2.38	2.8	0.1	★	★		☆		
		DCGT070201L-XF	7.8	6.35	2.38	2.8	0.1	★	★		☆		
		DCGT070202R-XF	7.8	6.35	2.38	2.8	0.2	★	★		☆		
		DCGT070202L-XF	7.8	6.35	2.38	2.8	0.2	★	★		☆		
		DCGT070204R-XF	7.8	6.35	2.38	2.8	0.4	★	★		☆		
		DCGT070204L-XF	7.8	6.35	2.38	2.8	0.4	★	★		☆		
		DCGT11T3005R-XF	11.6	9.525	3.97	4.4	0.05	★	★		☆		
		DCGT11T3005L-XF	11.6	9.525	3.97	4.4	0.05	★	★		☆		
		DCGT11T301R-XF	11.6	9.525	3.97	4.4	0.1	★	★		☆		
		DCGT11T301L-XF	11.6	9.525	3.97	4.4	0.1	★	★		☆		
Finishing		DCGT11T302R-XF	11.6	9.525	3.97	4.4	0.2	★	★		☆	SDJC**--11 SDNC**--11 Page(A123) S-SDUC**--11 Page(A127)	
		DCGT11T302L-XF	11.6	9.525	3.97	4.4	0.2	★	★		☆		
		DCGT11T304R-XF	11.6	9.525	3.97	4.4	0.4	★	★		☆		
		DCGT11T304L-XF	11.6	9.525	3.97	4.4	0.4	★	★		☆		
		DCGT11T301FR-PJ	11.6	9.525	3.97	4.4	0.1	★	★		☆		
		DCGT11T302FR-PJ	11.6	9.525	3.97	4.4	0.2	★	★		☆		
DCGT11T304ER-PJ	11.6	9.525	3.97	4.4	0.4	★	★		☆				

★ Recommended grade ☆ Available grade

Positive insert

Working condition: ● Stable ● Average ❏ Tough

Processing	Insert shape	Type	Dimension (mm)					Workpiece material					Applicable tool
			LE	IC	S	DI	RE	PVD		Cemented carbide	Cermet		
			HR1135	HR7125	HRK10	HRC10	HR115C						
Finishing		DCGT0702005FR-PU	7.8	6.35	2.38	2.8	0.05	★	★		☆		SDJC**--07 SDNC**--07 Page(A123) S-SDUC**--07 Page(A127)
		DCGT0702005FL-PU	7.8	6.35	2.38	2.8	0.05	★	★		☆		
		DCGT070201FR-PU	7.8	6.35	2.38	2.8	0.1	★	★		☆		
		DCGT070201FL-PU	7.8	6.35	2.38	2.8	0.1	★	★		☆		
		DCGT070202FR-PU	7.8	6.35	2.38	2.8	0.2	★	★		☆		
		DCGT070202FL-PU	7.8	6.35	2.38	2.8	0.2	★	★		☆		
		DCGT070204FR-PU	7.8	6.35	2.38	2.8	0.4	★	★		☆		
		DCGT070204FL-PU	7.8	6.35	2.38	2.8	0.4	★	★		☆		
		DCGT11T3005FR-PU	11.6	9.525	3.97	4.4	0.05	★	★		☆		
		DCGT11T3005FL-PU	11.6	9.525	3.97	4.4	0.05	★	★		☆		
		DCGT11T301FR-PU	11.6	9.525	3.97	4.4	0.1	★	★		☆		
		DCGT11T301FL-PU	11.6	9.525	3.97	4.4	0.1	★	★		☆		
		DCGT11T302FR-PU	11.6	9.525	3.97	4.4	0.2	★	★		☆		
		DCGT11T302FL-PU	11.6	9.525	3.97	4.4	0.2	★	★		☆		
		DCGT11T304FR-PU	11.6	9.525	3.97	4.4	0.4	★	★		☆		
		DCGT11T304FL-PU	11.6	9.525	3.97	4.4	0.4	★	★		☆		
		DCGT070201R-PU	7.8	6.35	2.38	2.8	0.1	★	★		☆	SDJC**--07 SDNC**--07 Page(A123) S-SDUC**--07 Page(A127)	
		DCGT070201L-PU	7.8	6.35	2.38	2.8	0.1	★	★		☆		
		DCGT070202R-PU	7.8	6.35	2.38	2.8	0.2	★	★		☆		
		DCGT070202L-PU	7.8	6.35	2.38	2.8	0.2	★	★		☆		
		DCGT070204R-PU	7.8	6.35	2.38	2.8	0.4	★	★		☆		
		DCGT070204L-PU	7.8	6.35	2.38	2.8	0.4	★	★		☆		
		DCGT11T301R-PU	11.6	9.525	3.97	4.4	0.1	★	★		☆	SDJC**--11 SDNC**--11 Page(A123) S-SDUC**--11 Page(A127)	
		DCGT11T301L-PU	11.6	9.525	3.97	4.4	0.1	★	★		☆		
DCGT11T302R-PU	11.6	9.525	3.97	4.4	0.2	★	★		☆				
DCGT11T302L-PU	11.6	9.525	3.97	4.4	0.2	★	★		☆				
DCGT11T304R-PU	11.6	9.525	3.97	4.4	0.4	★	★		☆				
DCGT11T304L-PU	11.6	9.525	3.97	4.4	0.4	★	★		☆				

★ Recommended grade ☆ Available grade

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Positive insert

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide		Cermets		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
Ultra finishing		TBGT060101R	6.9	3.97	1.59	2.3	0.1	★	★		☆		S-STLB**--06 Page(A128)	
		TBGT060101L	6.9	3.97	1.59	2.3	0.1	★	★		☆			
		TBGT060102R	6.9	3.97	1.59	2.3	0.2	★	★		☆			
		TBGT060102L	6.9	3.97	1.59	2.3	0.2	★	★		☆			
		TBGT060104R	6.9	3.97	1.59	2.3	0.4	★	★		☆			
		TBGT060104L	6.9	3.97	1.59	2.3	0.4	★	★		☆			

★ Recommended grade ☆ Available grade

Workpiece material

P Steel	● ● ● ● ● ●
M Stainless steel	● ● ● ●
K Cast iron	
N Non-ferrous metal	● ●
S Heat resistant super alloys Titanium alloy	● ●

Positive insert

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide		Cermets		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
Ultra finishing		TCGT080201R-PU	8.2	4.76	2.38	2.3	0.1	★	★		☆		STGC**--08 Page(A124)	
		TCGT080201F-PU	8.2	4.76	2.38	2.3	0.1	★	★		☆			
		TCGT080202R-PU	8.2	4.76	2.38	2.3	0.2	★	★		☆			
		TCGT080202L-PU	8.2	4.76	2.38	2.3	0.2	★	★		☆			
		TCGT110201R-PU	11	6.35	2.38	2.8	0.1	★	★		☆		STGC**--11 Page(A124)	
		TCGT110201L-PU	11	6.35	2.38	2.8	0.1	★	★		☆			
		TCGT110202R-PU	11	6.35	2.38	2.8	0.2	★	★		☆			
		TCGT110202L-PU	11	6.35	2.38	2.8	0.2	★	★		☆			
		TCGT110204R-PU	11	6.35	2.38	2.8	0.4	★	★		☆		STGC**--08 Page(A124)	
		TCGT110204L-PU	11	6.35	2.38	2.8	0.4	★	★		☆			
		TCGT0802005FR-PU	8.2	4.76	2.38	2.3	0.05	★	★		☆			
		TCGT0802005FL-PU	8.2	4.76	2.38	2.3	0.05	★	★		☆			
		TCGT080201FR-PU	8.2	4.76	2.38	2.3	0.1	★	★		☆		STGC**--11 Page(A124)	
		TCGT080201FL-PU	8.2	4.76	2.38	2.3	0.1	★	★		☆			
		TCGT080202FR-PU	8.2	4.76	2.38	2.3	0.2	★	★		☆			
		TCGT080202FL-PU	8.2	4.76	2.38	2.3	0.2	★	★		☆			
		TCGT1102005FR-PU	11	6.35	2.38	2.8	0.05	★	★		☆		STGC**--11 Page(A124)	
		TCGT1102005FL-PU	11	6.35	2.38	2.8	0.05	★	★		☆			
		TCGT110201FR-PU	11	6.35	2.38	2.8	0.1	★	★		☆			
		TCGT110201FL-PU	11	6.35	2.38	2.8	0.1	★	★		☆			
		TCGT110202FR-PU	11	6.35	2.38	2.8	0.2	★	★		☆			
		TCGT110202FL-PU	11	6.35	2.38	2.8	0.2	★	★		☆			
		TCGT110204FR-PU	11	6.35	2.38	2.8	0.4	★	★		☆			
		TCGT110204FL-PU	11	6.35	2.38	2.8	0.4	★	★		☆			

★ Recommended grade ☆ Available grade

Workpiece material

P Steel	● ● ● ● ● ●
M Stainless steel	● ● ● ●
K Cast iron	
N Non-ferrous metal	● ●
S Heat resistant super alloys Titanium alloy	● ●

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Positive insert

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermet		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C	
Ultra finishing		TPGH080201R	8.2	4.76	2.38	2.3	0.1	★	★		☆		STGP**--08 Page(A124) S-STLP**--08 Page(A128)
		TPGH080201L	8.2	4.76	2.38	2.3	0.1	★	★		☆		
		TPGH080202R	8.2	4.76	2.38	2.3	0.2	★	★		☆		
		TPGH080202L	8.2	4.76	2.38	2.3	0.2	★	★		☆		
		TPGH080204R	8.2	4.76	2.38	2.3	0.4	★	★		☆		
		TPGH080204L	8.2	4.76	2.38	2.3	0.4	★	★		☆		
		TPGH090201R	9.6	5.56	2.38	3.2	0.1	★	★		☆		STGP**--09 Page(A124) S-STLP**--09 Page(A128)
		TPGH090201L	9.6	5.56	2.38	3.2	0.1	★	★		☆		
		TPGH090202R	9.6	5.56	2.38	3.2	0.2	★	★		☆		
		TPGH090202L	9.6	5.56	2.38	3.2	0.2	★	★		☆		
		TPGH090204R	9.6	5.56	2.38	3.2	0.4	★	★		☆		STGP**--11 Page(A124) S-STLP**--11 Page(A128)
		TPGH090204L	9.6	5.56	2.38	3.2	0.4	★	★		☆		
		TPGH110202R	11	6.35	2.38	2.8	0.2	★	★		☆		
		TPGH110202L	11	6.35	2.38	2.8	0.2	★	★		☆		
		TPGH110204R	11	6.35	2.38	2.8	0.4	★	★		☆		
		TPGH110204L	11	6.35	2.38	2.8	0.4	★	★		☆		
		TPGH110302R	11	6.35	3.18	3.3	0.2	★	★		☆		
		TPGH110302L	11	6.35	3.18	3.3	0.2	★	★		☆		
		TPGH110304R	11	6.35	3.18	3.3	0.4	★	★		☆		
		TPGH110304L	11	6.35	3.18	3.3	0.4	★	★		☆		
TPGH110308R	11	6.35	3.18	3.3	0.8	★	★		☆				
TPGH110308L	11	6.35	3.18	3.3	0.8	★	★		☆				

★ Recommended grade ☆ Available grade

Positive insert

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermet		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C	
Ultra finishing		TPGH0902005R-PU	9.6	5.56	2.38	2.8	0.05	★	★		☆		STGP**--09 Page(A124) S-STLP**--09 Page(A142)
		TPGH0902005L-PU	9.6	5.56	2.38	2.8	0.05	★	★		☆		
		TPGH090201R-PU	9.6	5.56	2.38	2.8	0.1	★	★		☆		
		TPGH090201L-PU	9.6	5.56	2.38	2.8	0.1	★	★		☆		
		TPGH090202R-PU	9.6	5.56	2.38	2.8	0.2	★	★		☆		
		TPGH090202L-PU	9.6	5.56	2.38	2.8	0.2	★	★		☆		
		TPGH1103005R-PU	11	6.35	3.18	3.3	0.05	★	★		☆		STGP**--11 Page(A124) S-STLP**--11 Page(A128)
		TPGH1103005L-PU	11	6.35	3.18	3.3	0.05	★	★		☆		
		TPGH110301R-PU	11	6.35	3.18	3.3	0.1	★	★		☆		
		TPGH110301L-PU	11	6.35	3.18	3.3	0.1	★	★		☆		
		TPGH110302R-PU	11	6.35	3.18	3.3	0.2	★	★		☆		
		TPGH110302L-PU	11	6.35	3.18	3.3	0.2	★	★		☆		
		TPGH110304R-PU	11	6.35	3.18	3.3	0.4	★	★		☆		
		TPGH110304L-PU	11	6.35	3.18	3.3	0.4	★	★		☆		

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A

Positive insert

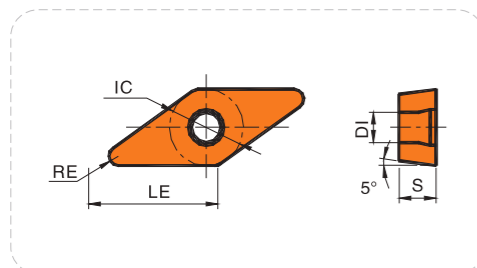

Working condition: ● Stable ● Average ■ Tough


Workpiece material	Stable	Average	Tough
P Steel	●	●	●
M Stainless steel	●	●	●
K Cast iron			
N Non-ferrous metal		●	●
S Heat resistant super alloys Titanium alloy	●	●	

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermets		Applicable tool	
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
Ultra finishing		VBGT1103005R-XF	11	6.35	3.18	2.8	0.05	★	★		☆		SVJB**--11 SVVB**--11 Page(A125)	
		VBGT1103005L-XF	11	6.35	3.18	2.8	0.05	★	★		☆			
		VBGT110301R-XF	11	6.35	3.18	2.8	0.1	★	★		☆			
		VBGT110301L-XF	11	6.35	3.18	2.8	0.1	★	★		☆			
		VBGT110302R-XF	11	6.35	3.18	2.8	0.2	★	★		☆			
		VBGT110302L-XF	11	6.35	3.18	2.8	0.2	★	★		☆			
		VBGT110304R-XF	11	6.35	3.18	2.8	0.4	★	★		☆			
Finishing		VBGT110304L-XF	11	6.35	3.18	2.8	0.4	★	★		☆		SVJB**--11 SVVB**--11 Page(A125)	
		VBGT1103005R-PY	11	6.35	3.18	2.8	0.05	★	★		☆			
		VBGT1103005L-PY	11	6.35	3.18	2.8	0.05	★	★		☆			
		VBGT110301R-PY	11	6.35	3.18	2.8	0.1	★	★		☆			
		VBGT110301L-PY	11	6.35	3.18	2.8	0.1	★	★		☆			
		VBGT110302R-PY	11	6.35	3.18	2.8	0.2	★	★		☆			
		VBGT110302L-PY	11	6.35	3.18	2.8	0.2	★	★		☆			
		VBGT110304R-PY	11	6.35	3.18	2.8	0.4	★	★		☆			
		VBGT110304L-PY	11	6.35	3.18	2.8	0.4	★	★		☆			
		VBGT160402R-PY	16.6	9.525	4.76	4.4	0.2	★	★		☆			SVJB**--16 SVVB**--16 Page(A125)
		VBGT160402L-PY	16.6	9.525	4.76	4.4	0.2	★	★		☆			
VBGT160404R-PY	16.6	9.525	4.76	4.4	0.4	★	★		☆					
VBGT160404L-PY	16.6	9.525	4.76	4.4	0.4	★	★		☆					
VBGT160408R-PY	16.6	9.525	4.76	4.4	0.8	★	★		☆					
VBGT160408L-PY	16.6	9.525	4.76	4.4	0.8	★	★		☆					

★ Recommended grade ☆ Available grade

A

Positive insert

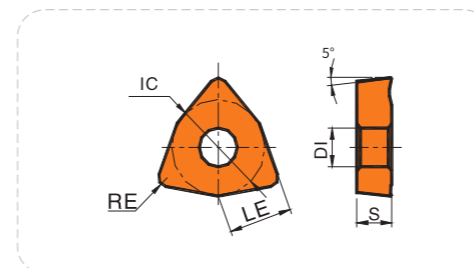

Working condition: ● Stable ● Average ■ Tough

Workpiece material	Stable	Average	Tough
P Steel	●	●	●
M Stainless steel	●	●	●
K Cast iron			
N Non-ferrous metal		●	●
S Heat resistant super alloys Titanium alloy	●	●	

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermets		Applicable tool
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C	
Ultra finishing		WBG060101L-XF	3.3	4	1.59	2.3	0.1	★	★		☆		S-SWUB**--06 Page(A129)
		WBG060102L-XF	3.3	4	1.59	2.3	0.2	★	★		☆		
		WBG060104L-XF	3.3	4	1.59	2.3	0.4	★	★		☆		

★ Recommended grade ☆ Available grade

A


Back turning insert code key



① Insert name		② Insert length (mm)		③ Cutting direction		④ Thickness	
HBS	Back turning inserts	15	15.4	R	Right	4	4.2

⑤ Corner radius (mm)	
005	0.05

Back turning insert

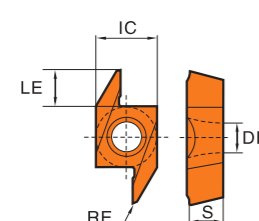

Working condition: ● Stable ● Average ■ Tough

Workpiece material	P Steel	●	●●		●	●
	M Stainless steel	●●	●●			
	K Cast iron					
	N Non-ferrous metal			●●		
	S Heat resistant super alloys Titanium alloy	●	●			

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide	Cermet	
			LE	IC	S	DI	RE	HR1135	HR7125	HRK10	HRC10	HR115C
Back turning		HBS15R4005	4.2	7	3.97	3.4	0.05	★	★		☆	
		HBS15R4015	4.2	7	3.97	3.4	0.15	★	★		☆	

★ Recommended grade ☆ Available grade

Cody key of external turning tools for small components



① Clamping	
A	Backside calmping
C	Pressing calmping
P	Lever calmping
S	Screw calmping

② Insert shape	
C	80° rhombus
D	55° rhombus
S	Square
T	Regular triangle
V	35° rhombus

③ Entering angle			
A	B	D	F
G	J	K	L
N	P	S	T
V			

④ Insert clearance angle	
B	5° Postive
C	7° Postive
N	0° Negative
P	11° Postive

⑤ Hand of tool	
R	Right hand
L	Left hand
N	Left and right hands

⑥ Corner height (mm)	
8	08
10	10
12	12
16	16
20	20
25	25

⑦ Width of tool holder (mm)	
8	08
10	10
12	12
16	16
20	20
25	25

⑧ Tool length (mm)	
F	80
H	100
JX	120
K	125
M	150

Inscribed circle of insert	⑨ Cutting edge length (mm)				
	Square	Regular triangle	80°rhombus	55°rhombus	35°rhombus
6.00	-	-	-	-	-
6.35	-	11	06	07	11
7.94	-	13	-	-	-
8.00	-	-	-	-	-
9.525	09	16	09	11	16
10.00	-	-	-	-	-
12.00	-	-	-	-	-
12.70	12	22	12	15	-

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cody key of internal turning tools for small components




① Tool material		③ Shank length (mm)		⑥ Entering angle			
S	Steel	K	125	F	K	L	Q
		M	150				
		Q	180				
		R	200				
		S	250				
		T	300				
		U	350				
				U			
② Tool diameter (mm)		④ Clamping					
08	08	S	Screw clamping				
10	10						
12	12						
16	16						
20	20						
25	25						
32	32						

⑤ Insert shape		⑦ Insert clearance angle		⑧ Hand of tool	
C	80° Rhombus	C	7°	R	Right hand
D	55° Rhombus	P	11°	L	Left hand
S	Square			N	Left and right hands
T	Regular triangle				
V	35° Rhombus				
⑨ Cutting edge length (mm)					
Inscribed circle IC	Insert shape				
	Square	Regular triangle	80° Rhombus	55° Rhombus	35° Rhombus
5.556	-	09	-	-	-
6.350	-	11	06	07	11
9.525	09	16	09	11	-
12.70	12	-	12	-	-

Turning of small components


STLN
KARP:95°

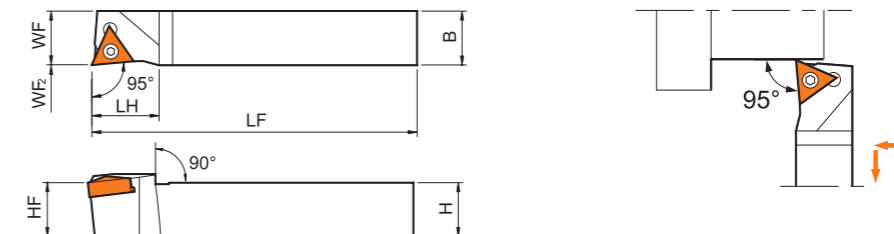

Model	Inventory		Dimension (mm)						Accessories		Matching insert
	R	L	H	HF	B	LF	LH	WF	Insert screw	Wrench	
STLNRL	△	△	16	16	16	120	15	16	M4X10	WR15	TNGG16**
	△	△	20	20	20	120	15	20			

▲ Standing inventory △ Make-to-order

SCLCR/L
KARP:95°

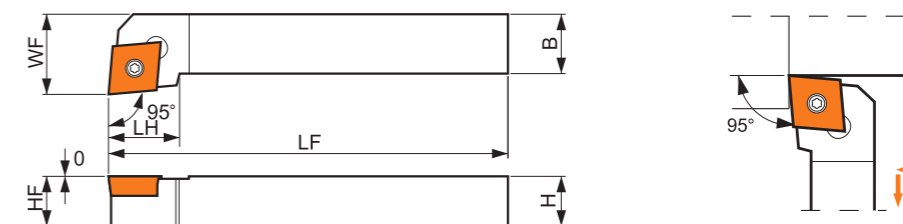

Model	Inventory		Dimension (mm)						Accessories		Matching insert
	R	L	H	HF	B	LF	LH	WF	Insert screw	Wrench	
SCLCR/L	△	△	10	10	10	80	9	12	M2.5X7	WR15	CCGT06**
	△	△	10	10	10	80	14	14			
	▲	▲	12	12	12	100	14	16			
	△	△	16	16	16	100	15	20			
	△	△	20	20	20	125	22	25			
	△	△	25	25	25	150	22	32	M4.0X8.5	WR15	CCGT09**

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

A

Turning of small components


SDJCR/L
KARP:93°

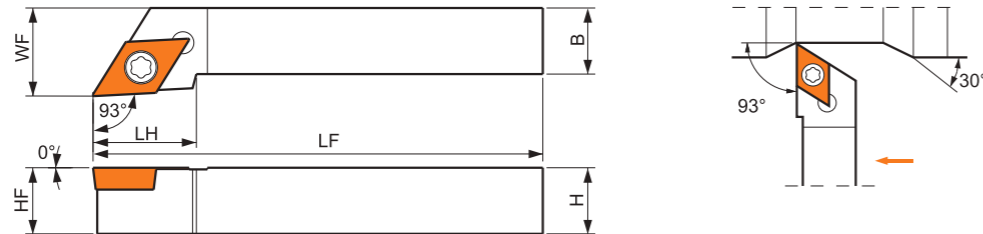

Model	Inventory		Dimension (mm)							Accessories			Matching insert
	R	L	H	HF	B	LF	LH	WF	Insert screw	Wrench	Matching insert		
SDJCR/L	1010F-07	△	△	10	10	10	80	12	12	M2.5X7	WR08	DCGT07**	
	1010F-11	△	△	10	10	10	80	18	12				
	1212H-11	▲	▲	12	12	12	100	18	16				
	1616H-11	△	△	16	16	16	100	18	20				
	2020K-11	△	△	20	20	20	125	18	25				
	2525M-11	△	△	25	25	25	150	23	32				

▲ Standing inventory △ Make-to-order

SDNCN
KARP:62.5°

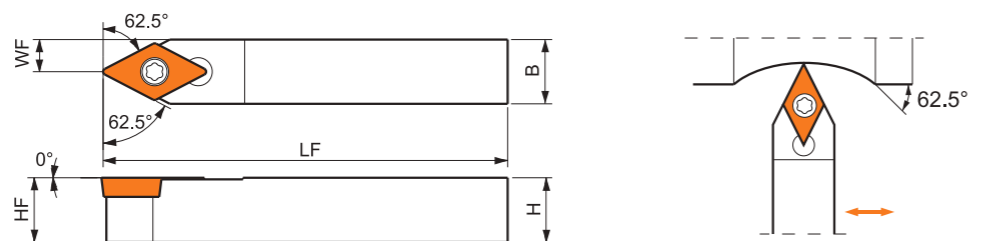


Model	Inventory		Dimension (mm)							Accessories			Matching insert
	R	L	H	HF	B	LF	WF	Insert screw	Wrench	Matching insert			
SDNCN	1010JX-07	△	△	10	10	10	120	5	M2.5X7	WR8	DCGT07**		
	1212JX-07	▲	▲	12	12	12	120	6					
	1010JX-11	△	△	10	10	10	120	5					
	1212JX-11	▲	▲	12	12	12	120	6					
	1616JX-11	△	△	16	16	16	120	8					
	1010F-11	△	△	10	10	10	80	5					
	1212F-11	▲	▲	12	12	12	80	6					
	1616H-11	△	△	16	16	16	100	8					

▲ Standing inventory △ Make-to-order

Turning of small components

STGC(P)
KARP:91°

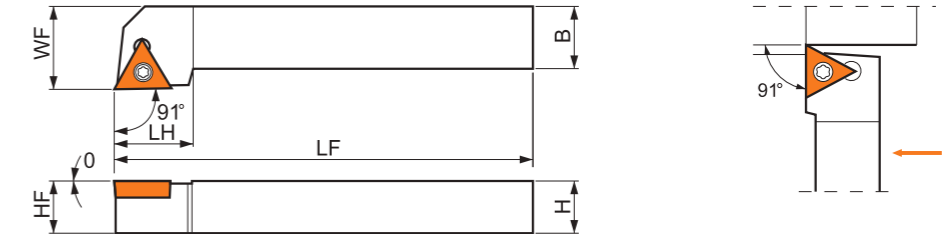

Model	Inventory		Dimension (mm)							Accessories			Matching insert	
	R	L	H	HF	B	LF	LH	WF	Insert screw	Wrench	Matching insert			
STGCR/L	0808E-08	△	△	8	8	8	70	12	10	M2.0X5	WR6	TCGT08**		
	1010F-08	△	△	10	10	10	80	12	12					
	1010F-11	△	△	10	10	10	80	15	14					
	1212H-11	▲	▲	12	12	12	100	15	16					
	1616H-11	△	△	16	16	16	100	15	20					
	2020K-11	△	△	20	20	20	125	15	25					
STGPR/L	0808E-08	△	△	8	8	8	70	12	10	M2.0X5	WR6	TPGT08**		
	1010F-09	△	△	10	10	10	80	12	12				TPGH09**	
	1010F-11	△	△	10	10	10	80	15	14					
	1212H-11	▲	▲	12	12	12	100	15	16			M2.5X7	WR8	TPGT11**
	1616H-11	△	△	16	16	16	100	15	20					

▲ Standing inventory △ Make-to-order

A

General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill


A124

A123

A

Turning of small components


SVJBR/L KARP:93°

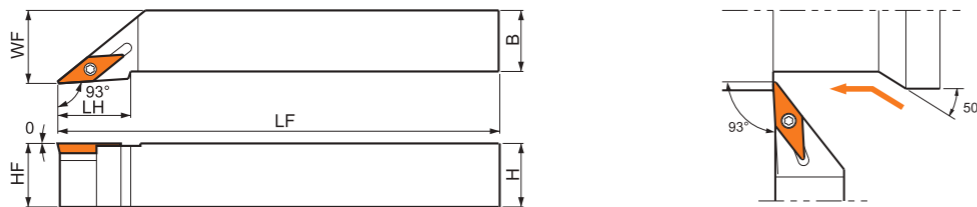

Model	Inventory		Dimension (mm)							Accessories			Matching insert
	R	L	H	HF	B	LF	LH	WF	Insert screw	Wrench			
SVJBR/L	2020K-11	△	△	20	20	20	125	30	10	M2.5X7	WR8	VBGT11**	
	2525M-11	△	△	25	25	25	150	35	12.5				
	2020K-16	△	△	20	20	20	125	30	10				
	2525M-16	△	△	25	25	25	150	30	12.5				

▲Standing inventory △Make-to-order

SVVBR/L KARP:72.5°

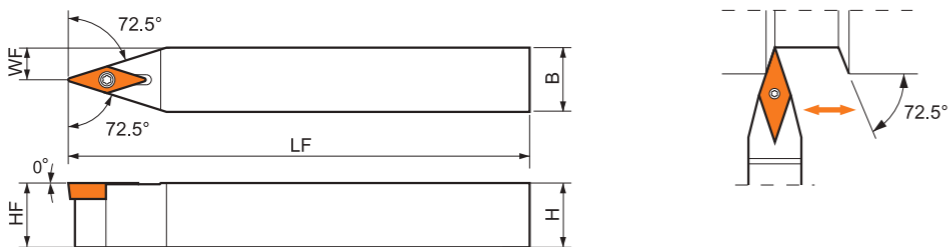


Model	Inventory		Dimension (mm)							Accessories			Matching insert
	R	L	H	HF	B	LF	WF	Insert screw	Wrench				
SVVBNL	1010JX-11	△	△	10	10	10	120	5	M2.5X7	WR8	VBGT11**		
	1212JX-11	△	△	12	12	12	120	6					
	1616JX-11	△	△	16	16	16	120	8					
	1010F-11	△	△	10	10	10	80	5					
	1212F-11	△	△	12	12	12	85	6					
	1616H-11	△	△	16	16	16	100	8					
	2020K-11	△	△	20	20	20	125	10	M4X12.5	WR15	VBGT16**		
	2525M-11	△	△	25	25	25	150	12.5					
	2020K-16	△	△	20	20	20	125	10					
	2525M-16	△	△	25	25	25	150	12.5					

▲Standing inventory △Make-to-order

Turning of small components

S-SCLC KARP:95°

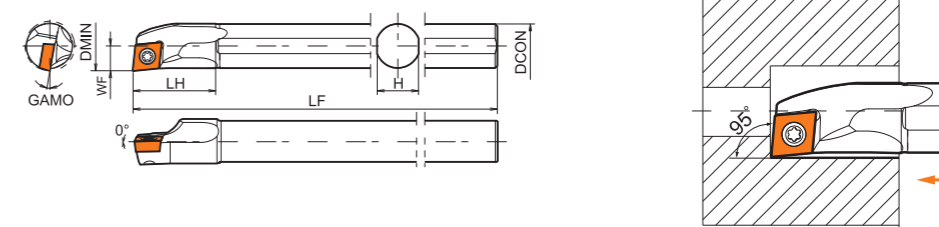

Model	Inventory		Dimension (mm)							Accessories			Matching insert
	R	L	DMIN	DCON	H	LF	LH	WF	Insert screw	Wrench			
S10-SCLCR/L	03-05AE	△	△	5	10	9	100	24	2.5	M1.6X3.5	WR6	CCGT03**	
	03-06AE	△	△	6	10	9	100	28	3				
	04-07AE	△	△	7	10	9	100	32	3.5				
	04-08AE	△	△	8	10	9	100	37	4	M2.0X3.5	WR6	CCGT04**	
	06-10AE	△	△	10	8	7	120	16	5				
	06-12AE	▲	▲	12	10	9	140	20	6	M2.5X4.5	WR8	CCGT06**	
	06-14AE	△	△	14	12	11	150	24	7				
	09-18AE	△	△	18	16	15	180	30	9	M4.0X6.5	WR15	CCGT09**	
	09-22AE	△	△	22	20	19	200	36	11				
	09-27AE	△	△	27	25	24	250	46	13.5				

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

A

Turning of small components

S-SDUC-A KARP:93°

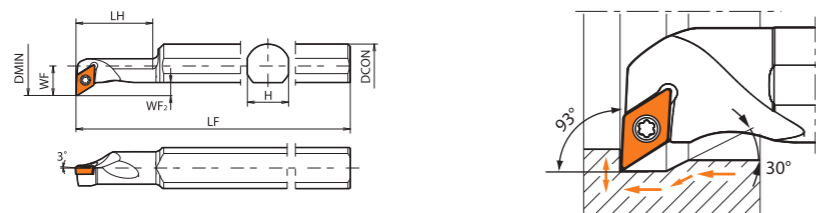


Model		Inventory		Dimension (mm)						Accessories			Matching insert
		R	L	DMIN	DCON	H	LF	LH	WF	Insert screw	Wrench		
S10L-SDUC	07-14A	△	△	14	10	9	140	19	8.7	M2.5X6.0	WR8	DCGT07**	
S16Q-SDUC	07-14A	△	△	14	16	15	180	28	10.8				
S12M-SDUC	07-16A	△	△	16	12	11	150	21	9.7				
S16Q-SDUC	07-20A	△	△	20	16	15	180	21	11.7				
S20R-SDUC	11-20A	△	△	20	20	19	200	48	15.6	M4.0X6.5	WR15	DCGT116**	
S16Q-SDUC	11-23A	▲	▲	23	16	15	180	21	14.5				
S20R-SDUC	11-27A	△	△	27	20	19	200	23	16.5				
S25S-SDUC	11-32A	△	△	32	25	24	250	24	19				

▲Standing inventory △Make-to-order

Turning of small components

S-STLB(P) KARP:95°

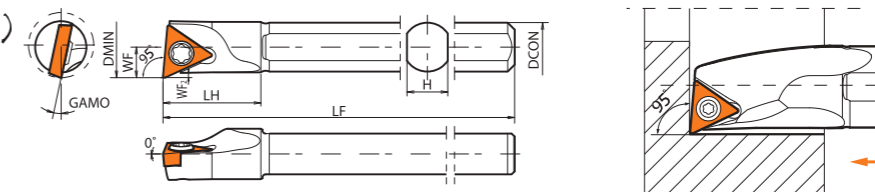

Model		Inventory		Dimension (mm)						Accessories			Matching insert
		R	L	DMIN	DCON	H	LF	LH	WF	Insert screw	Wrench		
S06H-STLB	06-08A	△	△	8	6	5	100	12	3.8	M2.0X3.5	WR6	TBGT06**	
S08X-STLP	08-10A	△	△	10	8	7	120	16	5	M2.0X3.5	WR6	TPGH08**	
	09-10A	△	△	10	8	7	120	16	5	M2.5X4.5	WR8	TPGH09**	
S10L-STLP	09-12A	△	△	12	10	9	140	20	6.2	M2.5X4.5	WR8	TPGH11**	
	11-12A	△	△	12	10	9	140	20	6	M2.5X4.5	WR8	TPGH11**	
S12M-STLP	11-14A	▲	▲	14	12	11	150	24	7.2	M2.5X4.5	WR8	TPGH09**	
S16Q-STLP	09-16A	△	△	16	12	11	150	24	8	M2.5X4.5	WR8	TPGH09**	
S16Q-STLP	11-18A	△	△	18	16	15	180	30	9.2	M2.5X4.5	WR8	TPGH11**	
S20R-STLP	11-22A	△	△	22	20	19	200	36	11.2	M2.5X4.5	WR8	TPGH11**	

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

A

Turning of small components

S-SWUB
KARP:93°

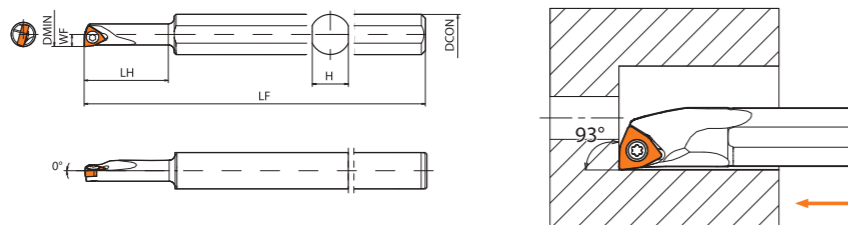

Model	Inventory		Dimension (mm)							Accessories			Matching insert
	R	L	DMIN	DCON	H	LF	LH	WF	Insert screw	Wrench			
S10H-SWUBR/L	06-06A	△	6	10	9	100	21	3	M2.0X5	WR6	WBGT06**		
	06-07A	△	7	10	9	100	25	3.5					

▲Standing inventory △Make-to-order

Shallow groove insert code key

TH **F** **16** **R** **100** - **005** □ □

① ② ③ ④ ⑤ ⑥ ⑦

① T-shape shallow groove insert	③ Inscribed circle diameter(mm) 16 9.525 22 12.7	④ Cutting direction R right L left	⑤ Insert width(mm) 100 1.0	⑦ Chipbreaker Default Straight type R Round type
② Insert type R General (10°rake angle) F Sharp (20°rake angle)	⑥ Corner radius(mm) 005 0.05			

Shallow groove tools code key

TH **R** **25** **25** **R** **22** - **M** **25**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Shallow groove tools	② Applicable insert R General type F Sharp type	③ Corner height(mm) 25 25	④ Cutter width(mm) 25 25	⑤ Hand of tool R right hand L left hand
⑥ Inscribed circle diameter(mm) 16 9.525 22 12.7	⑦ Shank length(mm) F 120 K 125 M 150	⑧ Application(mm) default General 15 Width of cut < 2.5 25 2.5 ≤ Width of cut < 3.5 35 3.5 ≤ Width of cut		

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

THR16 series—General type

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)							PVD		Cemented carbide	Cermet		Applicable tool
			IC	S	DI	CW	CDX	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
shallow groove machining		THR16R050-005	9.525	3.2	4.4	0.50	1.2	0.05	★	★					THR***R16-K THR***R16-M Page (A135)
		THR16R075-005	9.525	3.2	4.4	0.75	2.0	0.05	★	★					
		THR16R100-005	9.525	3.2	4.4	1.00	2.0	0.05	★	★					
		THR16R125-020	9.525	3.2	4.4	1.25	2.0	0.2	★	★					
		THR16R150-020	9.525	3.2	4.4	1.50	2.5	0.2	★	★					
		THR16R175-020	9.525	3.2	4.4	1.75	2.5	0.2	★	★					
		THR16R200-020	9.525	3.2	4.4	2.00	2.5	0.2	★	★					
		THR16R225-020	9.525	3.2	4.4	2.25	2.5	0.2	★	★					
		THR16R250-020	9.525	3.2	4.4	2.50	2.5	0.2	★	★					
		THR16R300-020	9.525	3.2	4.4	3.00	2.5	0.2	★	★					
		THR16L050-005	9.525	3.2	4.4	0.50	1.2	0.05	★	★					THR***L16-K THR***L16-M Page (A135)
		THR16L075-005	9.525	3.2	4.4	0.75	2.0	0.05	★	★					
		THR16L100-005	9.525	3.2	4.4	1.00	2.0	0.05	★	★					
		THR16L125-020	9.525	3.2	4.4	1.25	2.0	0.2	★	★					
		THR16L150-020	9.525	3.2	4.4	1.50	2.5	0.2	★	★					
		THR16L175-020	9.525	3.2	4.4	1.75	2.5	0.2	★	★					
		THR16L200-020	9.525	3.2	4.4	2.00	2.5	0.2	★	★					
		THR16L225-020	9.525	3.2	4.4	2.25	2.5	0.2	★	★					
		THR16L250-020	9.525	3.2	4.4	2.50	2.5	0.2	★	★					
		THR16L300-020	9.525	3.2	4.4	3.00	2.5	0.2	★	★					

Models not listed in the table, able to customize ★ Recommended grade ☆ Available grade

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

THR22 series—General type

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)							PVD		Cemented carbide	Cermet		Applicable tool
			IC	S	DI	CW	CDX	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
shallow groove machining		THR22R125-020	12.7	4.8	5.5	1.25	2.0	0.2	★	★					THR***R22-K15 THR***R22-M15 Page (A135)
		THR22R150-020	12.7	4.8	5.5	1.50	3.5	0.2	★	★					
		THR22R175-020	12.7	4.8	5.5	1.75	3.5	0.2	★	★					
		THR22R200-020	12.7	4.8	5.5	2.00	3.5	0.2	★	★					
		THR22R225-020	12.7	4.8	5.5	2.25	3.5	0.2	★	★					
		THR22R250-030	12.7	4.8	5.5	2.50	5.0	0.3	★	★					
		THR22R300-030	12.7	4.8	5.5	3.00	5.0	0.3	★	★					
		THR22R350-030	12.7	4.8	5.5	3.50	5.0	0.3	★	★					
		THR22R400-040	12.7	4.8	5.5	4.00	5.0	0.4	★	★					
		THR22R450-040	12.7	4.8	5.5	4.50	5.0	0.4	★	★					
		THR22L125-020	12.7	4.8	5.5	1.25	2.0	0.2	★	★					THR***L22-K15 THR***L22-M15 Page (A135)
		THR22L150-020	12.7	4.8	5.5	1.50	3.5	0.2	★	★					
		THR22L175-020	12.7	4.8	5.5	1.75	3.5	0.2	★	★					
		THR22L200-020	12.7	4.8	5.5	2.00	3.5	0.2	★	★					
		THR22L225-020	12.7	4.8	5.5	2.25	3.5	0.2	★	★					
		THR22L250-030	12.7	4.8	5.5	2.50	5.0	0.3	★	★					
		THR22L300-030	12.7	4.8	5.5	3.00	5.0	0.3	★	★					
		THR22L350-030	12.7	4.8	5.5	3.50	5.0	0.3	★	★					
		THR22L400-040	12.7	4.8	5.5	4.00	5.0	0.4	★	★					
		THR22L450-040	12.7	4.8	5.5	4.50	5.0	0.4	★	★					

Models not listed in the table, able to customize ★ Recommended grade ☆ Available grade

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

Profile series

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)						PVD		Cemented carbide		Cermet		Applicable tool
			IC	S	DI	CW	CDX	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
shallow groove machining (profile)		THR16R200-100R	9.525	3.2	4.4	2.00	2.5	1.00	★	★					THR***R16-K THR***R16-M Page (A135)
		THR16R300-150R	9.525	3.2	4.4	3.00	2.5	1.50	★	★					
		THR16L200-100R	9.525	3.2	4.4	2.00	2.5	1.00	★	★					THR***L16-K THR***L16-M Page (A135)
		THR16L300-150R	9.525	3.2	4.4	3.00	2.5	1.50	★	★					
		THR22R100-050R	12.7	4.8	5.5	1.00	2.0	0.50	★	★					
		THR22R150-075R	12.7	4.8	5.5	1.50	3.5	0.75	★	★					
		THR22R200-100R	12.7	4.8	5.5	2.00	3.5	1.00	★	★					
		THR22R250-125R	12.7	4.8	5.5	2.50	4.0	1.25	★	★					
		THR22R300-150R	12.7	4.8	5.5	3.00	4.0	1.50	★	★					
		THR22R400-200R	12.7	4.8	5.5	4.00	5.0	2.00	★	★					
		THR22L100-050R	12.7	4.8	5.5	1.00	2.0	0.50	★	★					
		THR22L150-075R	12.7	4.8	5.5	1.50	3.5	0.75	★	★					
		THR22L200-100R	12.7	4.8	5.5	2.00	3.5	1.00	★	★					
		THR22L250-125R	12.7	4.8	5.5	2.50	4.0	1.25	★	★					
		THR22L300-150R	12.7	4.8	5.5	3.00	4.0	1.50	★	★					
		THR22L400-200R	12.7	4.8	5.5	4.00	5.0	2.00	★	★					

Models not listed in the table, able to customize ★ Recommended grade ☆ Available grade

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

THF16 Series - Sharp type

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Dimension (mm)						PVD		Cemented carbide		Cermet		Applicable tool
			IC	S	DI	CW	CDX	RE	HR1135	HR7125	HRK10	HRC10	HR115C		
shallow groove machining		THF16R025-005	9.525	3.2	4.4	0.25	0.6	0.05	★	★					
		THF16R050-005	9.525	3.2	4.4	0.50	1.2	0.05	★	★					
		THF16R075-005	9.525	3.2	4.4	0.75	2.0	0.05	★	★					
		THF16R100-005	9.525	3.2	4.4	1.00	2.0	0.05	★	★					
		THF16R125-010	9.525	3.2	4.4	1.25	2.0	0.1	★	★					
		THF16R150-010	9.525	3.2	4.4	1.50	2.7	0.1	★	★					
		THF16R175-010	9.525	3.2	4.4	1.75	3.0	0.1	★	★					
		THF16R200-010	9.525	3.2	4.4	2.00	3.0	0.1	★	★					
		THF16R225-010	9.525	3.2	4.4	2.25	3.0	0.1	★	★					
		THF16R250-010	9.525	3.2	4.4	2.50	3.0	0.1	★	★					
		THF16R300-010	9.525	3.2	4.4	3.00	3.0	0.1	★	★					
		THF16L025-005	9.525	3.2	4.4	0.25	0.6	0.05	★	★					
		THF16L050-005	9.525	3.2	4.4	0.50	1.2	0.05	★	★					
		THF16L075-005	9.525	3.2	4.4	0.75	2.0	0.05	★	★					
		THF16L100-005	9.525	3.2	4.4	1.00	2.0	0.05	★	★					
		THF16L125-010	9.525	3.2	4.4	1.25	2.0	0.1	★	★					
		THF16L150-010	9.525	3.2	4.4	1.50	2.7	0.1	★	★					
		THF16L175-010	9.525	3.2	4.4	1.75	3.0	0.1	★	★					
		THF16L200-010	9.525	3.2	4.4	2.00	3.0	0.1	★	★					
		THF16L225-010	9.525	3.2	4.4	2.25	3.0	0.1	★	★					
		THF16L250-010	9.525	3.2	4.4	2.50	3.0	0.1	★	★					
		THF16L300-010	9.525	3.2	4.4	3.00	3.0	0.1	★	★					

Models not listed in the table, able to customize ★ Recommended grade ☆ Available grade

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A


Shallow groove tools

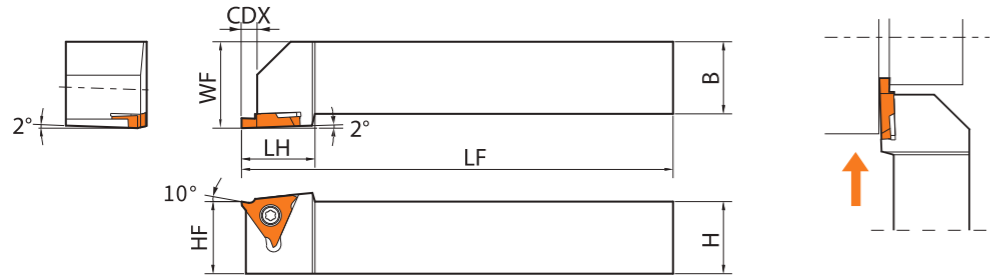

Model	Dimension (mm)									Mounting screw	Wrench	Applicable insert
	Inventory	H	HF	B	LF	LH	WF	CDX				
THR	2020R16-K	▲	20	20	20	125	24	25	2.5	STH□16	WR8	THR16□□
	2020L16-K	△	20	20	20	125	24	25	2.5			
	2525R16-M	▲	25	25	25	150	24	30	2.5			
	2525L16-M	▲	25	25	25	150	24	30	2.5			
	2020R22-K15	▲	20	20	20	125	25.5	25	4			
	2020L22-K15	△	20	20	20	125	25.5	25	4			
	2525R22-M15	▲	25	25	25	150	25.5	30	4	STH□22	WR15	THR22□□
	2525L22-M15	△	25	25	25	150	25.5	30	4			
	2020R22-K25	▲	20	20	20	125	25.5	25	5.5			
	2020L22-K25	△	20	20	20	125	25.5	25	5.5			
	2525R22-M25	▲	25	25	25	150	25.5	30	5.5			
	2525L22-M25	△	25	25	25	150	25.5	30	5.5			
	2020R22-K35	▲	20	20	20	125	25.5	25	5.5			
	2020L22-K35	△	20	20	20	125	25.5	25	5.5			
	2525R22-M35	▲	25	25	25	150	25.5	30	5.5			
	2525L22-M35	△	25	25	25	150	25.5	30	5.5			

▲Standing inventory △Make-to-order

Shallow groove tools

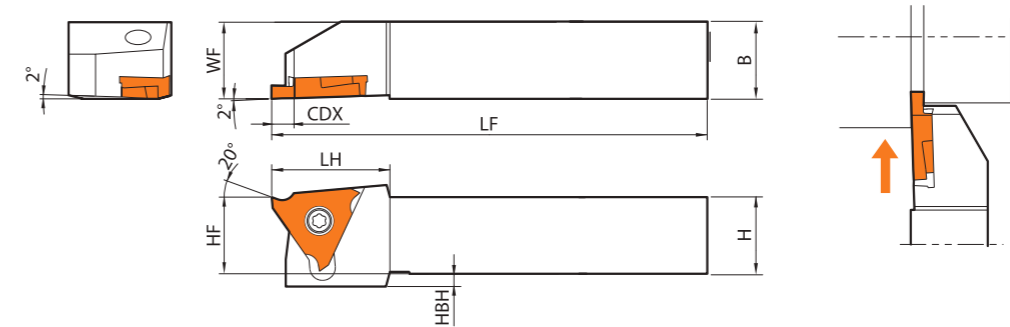

Model	Dimension (mm)										Mounting screw	Wrench	Applicable insert
	Inventory	H	HF	HBH	B	LF	LH	WF	CDX				
THF	1010R16-F	▲	10	10	4	10	120	18.5	10	3	STH□16	WR15	THF16□□
	1010L16-F	▲	10	10	4	10	120	18.5	10	3			
	1212R16-F	▲	12	12	2	12	120	18.5	12	3			
	1212L16-F	▲	12	12	2	12	120	18.5	12	3			
	1616R16-F	▲	16	16	-	16	120	18.5	16	3			
	1616L16-F	▲	16	16	-	16	120	18.5	16	3			
	2020R16-F	▲	20	20	-	20	120	18.5	20	3			
	2020L16-F	▲	20	20	-	20	120	18.5	20	3			

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill


A

Shallow groove insert customization form

STEP 1

Chip breaker type confirmation

Type A

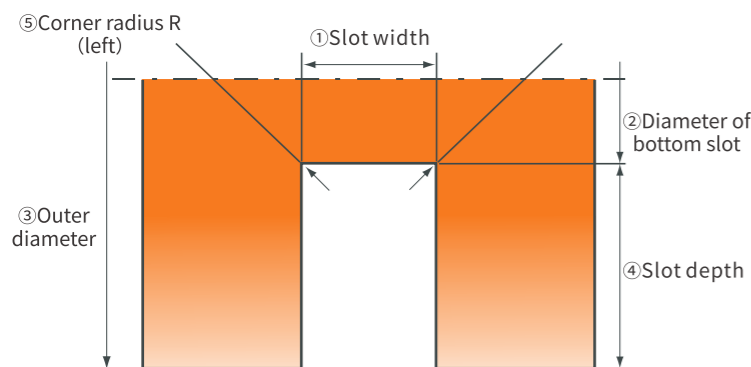


Customization form

Slot width/(mm)	≤0.5	≤1.25
Slot max/(mm)	≤1.2	≤2.0

Slot width/(mm)	≤3	≤4.5
Slot max/(mm)	≤5.0	≤5.0

*Corner radius could be accurate to 0.05mm

Type B

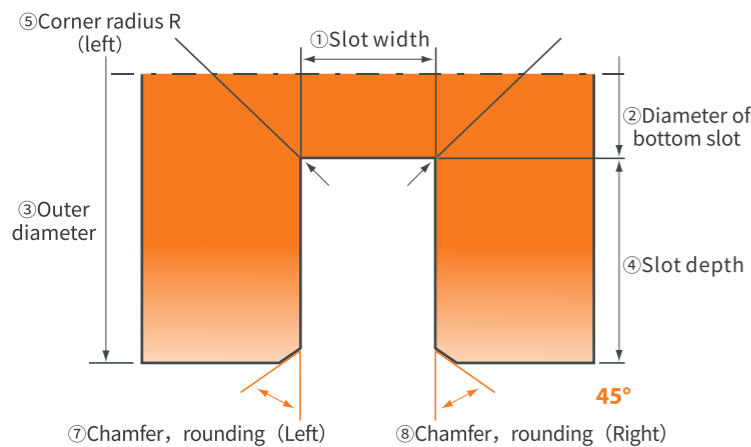

Customization form

Slot width/(mm)	≤0.5	≤1.25
Slot max/(mm)	≤1.2	≤2.0

Slot width/(mm)	≤3	≤4.5
Slot max/(mm)	≤5.0	≤5.0

*Corner radius could be accurate to 0.05mm

A

Shallow groove insert customization form

STEP 2

Fill in the form

1	Slot width	mm (tolerance:)
2	Diameter of bottom slot	mm (tolerance:)
3	Outer diameter	left: (tolerance:)
		right: (tolerance:)
4	Slot depth	left:
		right:
5	Corner radius	left:
		right:
6	Chamfer, rounding	left: mm×45°
		right: mm×45°

STEP 3

Fill in the form

workpiece		cooling type	
cutting parameter			
worn out standard			
tool type	<input type="checkbox"/> THF	<input type="checkbox"/> THR	
tool size		tool direction	

STEP 4

Fill in the form

Company name		Occupation	
Name		Cellphone	
Address			

A

A

A

A

A

A

A

A

A

Recommended cutting parameters for shallow groove insert

Workpieces	Recommended cutting parameters							
	Cutting speed (m/min)				(1)Feed under grooving machining (mm/rev) (2)Feed under plunge turning (mm/rev) (3) Ap under plunge turning (mm)			
	HR1135	HR7125	HRC10	HRK10	TH□□ 025-100	TH□□ 125-200	TH□□ 225-300	TH□□ 350-450
Carbon Steel	80-180	80-180	80-200		(1)0.03-0.08 (2)Not suggest (3)Not suggest	(1)0.04-0.09 (2) 0.04-0.09 (3)max 0.3	(1)0.05-0.12 (2) 0.05-0.09 (3)max 0.5	(1)0.05-0.12 (2) 0.05-0.1 (3)max 0.8
Alloy Steel	60-150	60-150	60-180		(1)0.03-0.07 (2)Not suggest (3)Not suggest	(1)0.04-0.09 (2) 0.04-0.09 (3)max 0.3	(1)0.05-0.1 (2) 0.05-0.09 (3)max 0.5	(1)0.05-0.1 (2) 0.05-0.1 (3)max 0.5
Stainless Steel	50-150	50-130			(1)0.03-0.07 (2)Not suggest (3)Not suggest	(1)0.04-0.08 (2) 0.04-0.08 (3)max 0.3	(1)0.05-0.09 (2) 0.05-0.09 (3)max 0.5	(1)0.05-0.1 (2) 0.05-0.1 (3)max 0.5
Cast iron				60-120	(1)0.03-0.08 (2)Not suggest (3)Not suggest	(1)0.04-0.09 (2) 0.04-0.09 (3)max 0.3	(1)0.05-0.1 (2) 0.05-0.1 (3)max 0.5	(1)0.05-0.12 (2) 0.05-0.1 (3)max 0.8
Aluminum alloy				150-400	(1)0.05-0.12 (2)Not suggest (3)Not suggest	(1)0.05-0.15 (2) 0.05-0.15 (3)max 0.5	(1)0.08-0.15 (2) 0.08-0.15 (3)max 0.8	(1)0.08-0.15 (2) 0.08-0.15 (3)max 0.8
Quenched steel, High hardness		60-120				(1)0.02-0.05 (2)Not suggest (3)Not suggest	(1)0.03-0.07 (2) 0.01-0.04 (3)max 0.1	

Notes: This table is about parameters of the external grooving machining. During internal grooving machining, the cutting speed and feed rate should be lower by about 10%.

Parting & grooving insert code key for small components

PTA 12 R 100 - S - 16 R

① ② ③ ④ ⑤ ⑥ ⑦

①	②	③	④
Insert type	APMX (mm)	Cutting direction	Cutting edge width (mm)
PTA parting & grooving insert	12 12 16 16	R Right L Left	100 1.0

⑤	⑥	⑦
Chipbreaker type	Cutting edge angle	Cutting edge incline direction
S S type	default 0° 16 16°	R Right L Left

Parting & grooving tool code key for small components

HRPTA 12 12 R - 12

① ② ③ ④ ⑤

①	②	③
Tool type	Corner hight (mm)	Cutter width (mm)
HRPTA Grooving and cut-off for small components	12 12	12 12

④	⑤
Hand of tool	Cut off diameter maximum
R Right hand L Left hand	12 12 16 16

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

A

PTA12 Series

Working condition: ● Stable ● Average ■ Tough



Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P Steel	●	●●	●	●	●
M Stainless steel	●●	●●			
K Cast iron					
N Non-ferrous metal				●●	
S Heat resistant super alloys Titanium alloy	●	●			

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide		Cermet		Applicable tool
			CW	θ	RE	DI	T-Max	HR1135	HR7125	HRK10	HFC10	HR115C		
Parting & grooving		PTA12R050-S	0.50	0°	0.05	4.6	2.5	★	★					HRPTA***R/L-12 Page (A143)
		PTA12R070-S	0.70	0°	0.05	4.6	4	★	★					
		PTA12R100-S	1.00	0°	0.05	4.6	6	★	★					
		PTA12R125-S	1.25	0°	0.05	4.6	6	★	★					
		PTA12R150-S	1.50	0°	0.05	4.6	6	★	★					
		PTA12R200-S	2.00	0°	0.05	4.6	6	★	★					
		PTA12L050-S	0.50	0°	0.05	4.6	2.5	★	★					
		PTA12L070-S	0.70	0°	0.05	4.6	4	★	★					
		PTA12L100-S	1.00	0°	0.05	4.6	6	★	★					
		PTA12L125-S	1.25	0°	0.05	4.6	6	★	★					
		PTA12L150-S	1.50	0°	0.05	4.6	6	★	★					
		PTA12L200-S	2.00	0°	0.05	4.6	6	★	★					
		PTA12R050-S-16R	0.50	16°	0.05	4.6	2.5	★	★					HRPTA***R/L-12 Page (A143)
		PTA12R070-S-16R	0.70	16°	0.05	4.6	4	★	★					
		PTA12R100-S-16R	1.00	16°	0.05	4.6	5.5	★	★					
		PTA12R125-S-16R	1.25	16°	0.05	4.6	5.5	★	★					
		PTA12R150-S-16R	1.50	16°	0.05	4.6	5.5	★	★					
		PTA12R200-S-16R	2.00	16°	0.05	4.6	5.5	★	★					
		PTA12L050-S-16R	0.50	16°	0.05	4.6	2.5	★	★					
		PTA12L070-S-16R	0.70	16°	0.05	4.6	4	★	★					
PTA12L100-S-16R	1.00	16°	0.05	4.6	5.5	★	★							
PTA12L125-S-16R	1.25	16°	0.05	4.6	5.5	★	★							
PTA12L150-S-16R	1.50	16°	0.05	4.6	5.5	★	★							
PTA12L200-S-16R	2.00	16°	0.05	4.6	5.5	★	★							

Models not listed in the table, able to customize ★ Recommended grade ☆ Available grade

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

PTA16 Series

Working condition: ● Stable ● Average ■ Tough



Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P Steel	●	●●	●	●	●
M Stainless steel	●●	●●			
K Cast iron					
N Non-ferrous metal				●●	
S Heat resistant super alloys Titanium alloy	●	●			

Processing	Insert shape	Type	Dimension (mm)					PVD		Cemented carbide		Cermet		Applicable tool
			CW	θ	RE	DI	T-Max	HR1135	HR7125	HRK10	HFC10	HR115C		
Parting & grooving		PTA16R150-S	1.50	0°	0.05	4.6	8	★	★					HRPTA***R/L-16 Page (A143)
		PTA16R200-S	2.00	0°	0.05	4.6	8	★	★					
		PTA16R300-S	3.00	0°	0.05	4.6	8	★	★					
		PTA16L150-S	1.50	0°	0.05	4.6	8	★	★					
		PTA16L200-S	2.00	0°	0.05	4.6	8	★	★					
		PTA16L300-S	3.00	0°	0.05	4.6	8	★	★					
		PTA16R150-S-16R	1.50	16°	0.05	4.6	8	★	★					HRPTA***R/L-16 Page (A143)
		PTA16R200-S-16R	2.00	16°	0.05	4.6	8	★	★					
		PTA16R300-S-16R	3.00	16°	0.05	4.6	8	★	★					
		PTA16L150-S-16R	1.50	16°	0.05	4.6	8	★	★					
		PTA16L200-S-16R	2.00	16°	0.05	4.6	8	★	★					
		PTA16L300-S-16R	3.00	16°	0.05	4.6	8	★	★					

Models not listed in the table, able to customize ★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A

Parting & grooving tools for small components

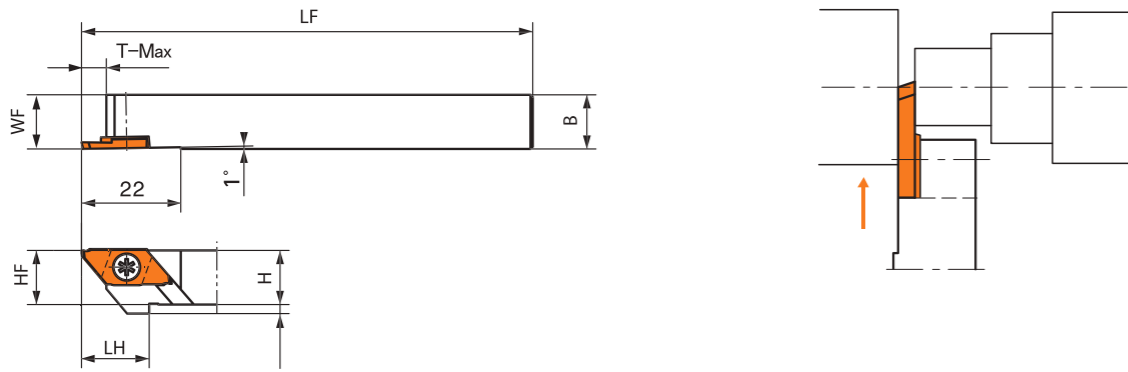


Max grooving diameter $\Phi 12$

Model	Dimension (mm)								Mounting screw	Wrench	Applicable insert	
	Inventory	H	HF	B	LF	LH	WF	T-Max				
HRPTA	1010R-12	▲	10	10	10	120	15	10	6	STH□16	WR8	PTA12□□
	1010L-12	△	10	10	10	120	15	10	6			
	1212R-12	▲	12	12	12	120	15	12	6			
	1212L-12	▲	12	12	12	120	15	12	6			
	1616R-12	▲	16	16	16	120	15	16	6			
	1616L-12	△	16	16	16	120	15	16	6			
	2020R-12	▲	20	20	20	120	15	20	6			
	2020L-12	△	20	20	20	120	15	20	6			

▲ Standing inventory △ Make-to-order

A

Parting & grooving tools for small components

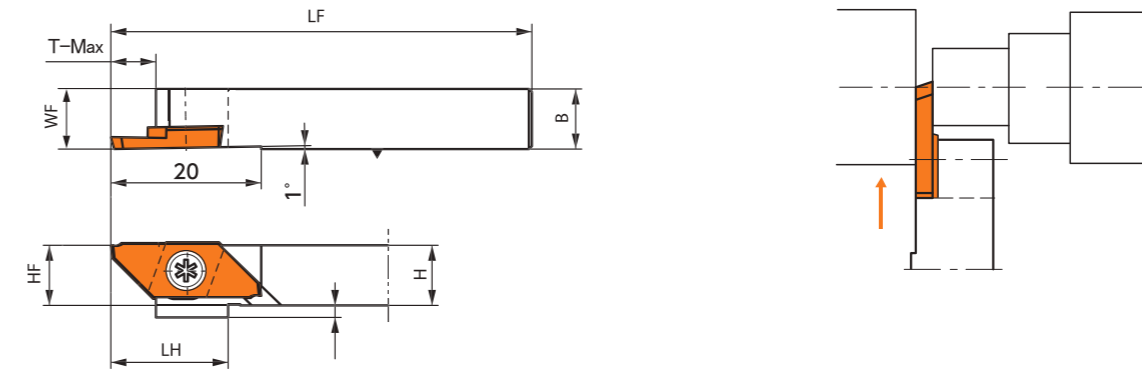

Max grooving diameter $\Phi 16$

Model	Dimension (mm)								Mounting screw	Wrench	Applicable insert	
	Inventory	H	HF	B	LF	LH	WF	T-Max				
HRPTA	1010R-16	▲	10	10	10	120	20	10	8	STH□16	WR8	PTA16□□
	1010L-16	△	10	10	10	120	20	10	8			
	1212R-16	▲	12	12	12	120	20	12	8			
	1212L-16	▲	12	12	12	120	20	12	8			
	1616R-16	▲	16	16	16	120	20	16	8			
	1616L-16	△	16	16	16	120	20	16	8			
	2020R-16	▲	20	20	20	120	20	20	8			
	2020L-16	△	20	20	20	120	20	20	8			

▲ Standing inventory △ Make-to-order

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill


Parting and Grooving



Turning

Parting and grooving

- ◆ Code key of parting and grooving inserts A-147
- ◆ Overview of parting and grooving tools A-148
- ◆ Parting and grooving inserts A-149
- ◆ Parting and grooving tools A-151
- ◆ Technical information for parting and grooving A-155

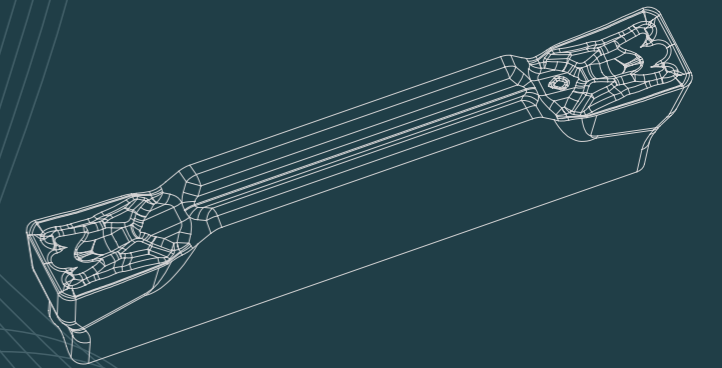

Code key of grooving inserts



① Insert type

Code	Type
QD	Parting insert
QC	Grooving insert
QP	Profile insert

② Tolerance class

Code	Standard
M	M—class tolerance
K	K—class tolerance
E	E—class tolerance

③ Cutting edge count

Code	Number of cutting edges
A	Single insert
B	Double inserts
C	Triple inserts

④ Cutting edge width

Code	Insert width (mm)
25	2.50
30	3.00
40	4.00
50	5.00
60	6.00
124	12.40

⑤ Corner radius

Code	Corner radius (mm)
00	0.00
02	0.20
03	0.30
04	0.40
08	0.80

⑥ Chip breaking geometries

Default	Flat
CT	CT-type
GT	GT-type
RM	RM-type
AK	AK-type

Overview of parting and grooving tools

Machining form	Diagram	Applicable tools	Applicable inserts	Features
External grooving		HREH□□	QCMB□□ QCKB□□ QPMB□□ QPEB□□	<ul style="list-style-type: none"> The multi-purpose cutting tool is compatible with different inserts such as grooving, profile and parting inserts. The insert can produce either pressing groove or grinding groove, which meet different machining requirements. The maximum groove depth is 20mm. With a profiling insert, it can be used to machines a variety of materials.
Parting		HREH□□	QCMB□□ QCKB□□	<ul style="list-style-type: none"> With our parting inserts, it can be used to cut and process various materials. Maximum parting diameter: 60mm.
Face grooving		HRFH□□	QCMB□□ QCKB□□ QPMB□□	<ul style="list-style-type: none"> The multi-purpose cutting tool is compatible with different inserts such as grooving, profiling and parting inserts. Groove depth: 10-20mm.
Internal grooving and turning		HRIV□□	QCMB□□ QCKB□□ QPMB□□	<ul style="list-style-type: none"> The multi-purpose cutting tool is compatible with different inserts such as grooving, profile and parting inserts. Minimum inscribed circle diameter for machining: 25mm. Maximum groove depth: 6mm.
Relief groove machining		HREU□□	QPMB□□	<ul style="list-style-type: none"> The 45° cutting tool structure shall complete a variety of forms of relief groove machining. Maximum vertical depth of the relief groove: 3.3mm.

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A

Parting and grooving insert

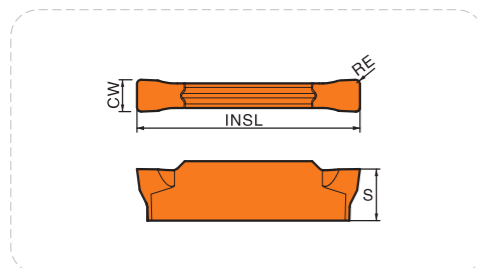


Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P	● ● ■ ■ ■	● ● ■ ■ ■	● ● ■ ■ ■	● ● ■ ■ ■	● ● ■ ■ ■
M		● ● ■ ■ ■		● ● ■ ■ ■	
K			● ● ■ ■ ■		
N				● ● ■ ■ ■	
S					● ● ■ ■ ■

Processing	Insert shape	Type	Dimension (mm)				CVD					PVD					Cemented carbide	Cermets									
			INSL	CW	S	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR9105	HR7115	HR7125	HR7225			HR5125	HR5225	HRK10	HRK20	HR10	HR15C			
Parting and grooving		QCMB1502-GT	16.0	1.5 (+0.03)	3.50	0.2 (± 0.03)	☆	★	☆				☆	★													
		QCMB2002-GT	16.0	2.0 (+0.03)	3.55	0.2 (± 0.03)	☆	★	☆				☆	★													
		QCMB2502-GT	18.5	2.5 (+0.05)	3.90	0.2 (± 0.05)	☆	★	☆				☆	★													
		QCMB3002-GT	21.0	3.0 (+0.05)	4.86	0.2 (± 0.05)	☆	★	☆				☆	★													
		QCMB4002-GT	21.0	4.0 (+0.05)	4.86	0.2 (± 0.05)	☆	★	☆				☆	★													
		QCMB5003-GT	26.0	5.0 (+0.05)	5.80	0.3 (± 0.05)	☆	★	☆				☆	★													
		QCMB6003-GT	26.0	6.0 (+0.05)	5.90	0.3 (± 0.05)	☆	★	☆				☆	★													
Grooving		QCKB2002	16.0	2.0 (± 0.02)	3.55	0.2 (± 0.05)								☆	★												
		QCKB3004	21.0	3.0 (± 0.02)	4.86	0.4 (± 0.05)								☆	★												
		QCKB4004	21.0	4.0 (± 0.02)	4.86	0.4 (± 0.05)								☆	★												
Grooving and plunge turning		QCMB1502-CT	16.0	1.5 (+0.03)	3.50	0.2 (± 0.03)	☆	★	☆				☆	★													
		QCMB2002-CT	16.0	2.0 (+0.03)	3.55	0.2 (± 0.03)	☆	★	☆				☆	★													
		QCMB2502-CT	18.5	2.5 (+0.05)	3.90	0.2 (± 0.05)	☆	★	☆				☆	★													
		QCMB3004-CT	21.0	3.0 (+0.05)	4.86	0.4 (± 0.05)	☆	★	☆				☆	★													
Grooving and plunge turning		QCMB4004-CT	21.0	4.0 (+0.05)	4.86	0.4 (± 0.05)	☆	★	☆				☆	★													
		QCMB5008-CT	26.0	5.0 (+0.05)	5.80	0.8 (± 0.05)	☆	★	☆				☆	★													

★ Recommended grade ☆ Available grade

Profile groove insert

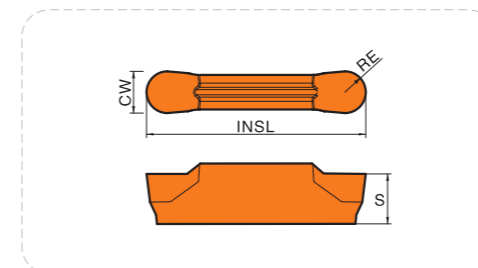

Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy
P	● ● ■ ■ ■	● ● ■ ■ ■	● ● ■ ■ ■	● ● ■ ■ ■	● ● ■ ■ ■
M		● ● ■ ■ ■		● ● ■ ■ ■	
K			● ● ■ ■ ■		
N				● ● ■ ■ ■	
S					● ● ■ ■ ■

Processing	Insert shape	Type	Dimension (mm)				CVD					PVD					Cemented carbide	Cermets								
			INSL	CW	S	RE	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR9105	HR7115	HR7125	HR7225			HR5125	HR5225	HRK10	HRK20	HR10	HR15C		
Profiling		QPMB2010-RM	16.0	2.0 (+0.05)	3.5	1.0 (± 0.05)	☆	★	☆				☆	★												
		QPMB3015-RM	21.0	3.0 (+0.05)	4.8	1.5 (± 0.05)	☆	★	☆				☆	★												
		QPMB4020-RM	21.0	4.0 (+0.05)	4.8	2.0 (± 0.05)	☆	★	☆				☆	★												
		QPMB5025-RM	26.0	5.0 (+0.05)	5.8	2.5 (± 0.05)	☆	★	☆				☆	★												
		QPMB6030-RM	26.0	6.0 (+0.05)	5.9	3.0 (± 0.05)	☆	★	☆				☆	★												
Aluminum hub groove insert		QPEB8040-AK	30.0	8.0 (± 0.02)	8.365	4.0 (± 0.05)																	★	★		

★ Recommended grade ☆ Available grade

A

General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

External grooving, parting and turning tools



90° end face grooving tool



Type	Dimension (mm)								Insert screw	Wrench	Applicable inserts
	Inventory	H=h	W	L	S	H1	T-MAX				
HREHR/L	1616-1.5-T12	△	16	16	100	16.2	/	12	HHA0512	WR40L	QCMB15□□
	2020-1.5-T12	△	20	20	125	20.2	/	12			
	2525-1.5-T12	△	25	25	150	25.2	/	12			
	1212-2-T08	△	12	12	100	12.2	/	8			
	1616-2-T08	△	16	16	100	16.2	/	8			
	2020-2-T08	▲	20	20	125	20.2	/	8			
	2525-2-T08	▲	25	25	150	25.2	/	8			
	1616-2-T12	△	16	16	100	16.2	/	12			
	2020-2-T12	△	20	20	125	20.2	/	12			
	2525-2-T12	▲	25	25	150	25.2	/	12			
	1616-2.5-T17	△	16	16	100	16.3	/	17			
	2020-2.5-T17	△	20	20	125	20.3	/	17			
	2525-2.5-T17	△	25	25	150	25.3	/	17			
	1616-3-T10	△	16	16	100	16.4	/	10			
	2020-3-T10	▲	20	20	125	20.4	/	10			
	2525-3-T10	▲	25	25	150	25.4	/	10			
	1616-3-T13	△	16	16	100	16.4	/	13			
	2020-3-T13	▲	20	20	125	20.4	/	13			
	2525-3-T13	▲	25	25	150	25.4	/	13			
	1616-3-T20	△	16	16	100	16.4	/	20			
	2020-3-T20	△	20	20	125	20.4	/	20			
	2525-3-T20	△	25	25	150	25.4	/	20			
	2020-4-T10	▲	20	20	125	20.4	/	10			
	2525-4-T10	▲	25	25	150	25.4	/	10			
	3232-4-T10	△	32	32	150	32.4	/	10			
	2020-4-T15	△	20	20	125	20.4	/	15			
	2525-4-T15	▲	25	25	150	25.4	/	15			
	2020-4-T20	△	20	20	125	20.4	/	20			
	2525-4-T20	△	25	25	150	25.4	/	20			
	3232-4-T20	△	32	32	170	32.4	/	20			
2020-5-T15	△	20	20	150	20.5	/	15				
2020-5-T23	△	20	20	150	20.5	/	23				
2525-5-T15	▲	25	25	150	25.5	/	15				
2525-5-T23	△	25	25	150	25.5	/	23				
3232-5-T15	△	32	32	170	32.5	/	15				
3232-5-T23	△	32	32	170	32.5	/	23				
2525-6-T15	▲	25	25	150	25.6	/	15				
2525-6-T23	△	25	25	150	25.6	/	23				
3232-6-T15	△	32	32	170	32.6	/	15				
3232-6-T23	△	32	32	170	32.6	/	23				

▲Standing inventory △Make-to-order

Type	Dimension (mm)							ΦD		Insert screw	Wrench	Applicable inserts
	Inventory	H=h	W	L	S	T-MAX	Min	Max				
HRFHR/L	325-34/50-T10	△	25	25	150	25.5	10	34	50	HHA0512	WR40L	QCMB30□□ QCKB30□□ QPMB30□□
	325-44/70-T15	▲	25	25	150	25.5	15	44	70			
	325-64/100-T15	△	25	25	150	25.5	15	64	100			
	425-40/60-T10	△	25	25	150	25.6	10	40	60	HHA0616	WR50L	QCMB40□□ QCKB40□□ QPMB40□□
	425-44/70-T15	▲	25	25	150	25.6	15	44	70			
	425-84/92-T15	△	25	25	150	25.6	15	84	92			
	425-60/120-T15	▲	25	25	150	25.6	15	60	120			
	425-112/200-T15	△	25	25	150	25.6	15	112	200			

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill


Relief groove tool



Type	Dimension (mm)								Insert screw	Wrench	Applicable inserts
	Inventory	H=h	W	L	S	ΦD Max	T-MAX				
HREUR/L	2020-3	△	20	20	125	23	40	2.8	HHA0512	WR40L	QPMB30□□
	2525-3	▲	25	25	150	28	40	2.8			
	3232-3	△	32	32	170	35	40	2.8			
	2020-4	▲	20	20	125	23	40	2.8	HHA0616	WR50L	QPMB40□□
	2525-4	▲	25	25	150	28	40	2.8			
	3232-4	△	32	32	170	35	40	2.8			
	2020-5	▲	20	20	125	23.5	50	3.3	HHA0616	WR50L	QPMB50□□
	3232-5	△	32	32	170	35.5	50	3.3			
	2020-6	△	20	20	125	23.5	50	3.3	HHA0616	WR50L	QPMB60□□
2525-6	▲	25	25	150	28.5	50	3.3				

▲ Standing inventory △ Make-to-order

Internal grooving and turning tools

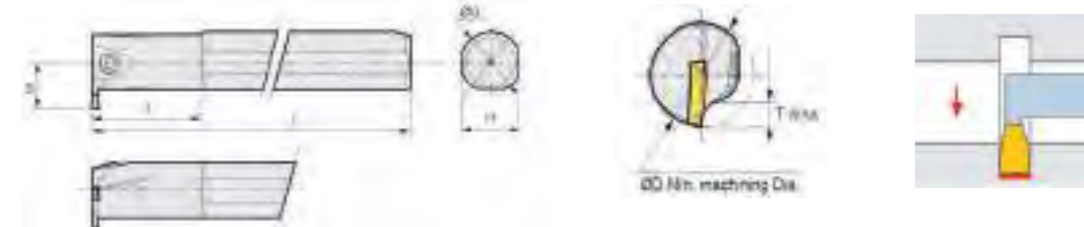

Type	Dimension (mm)									Insert screw	Wrench	Applicable inserts
	Inventory	ΦD	Φd	L	ℓ	T-MAX	H	S				
HRIVR/L	2016-1.5	△	20	16	125	35	3.5	15	11.3	HHA0512	WR40L	QCMB15□□
	2520-1.5	△	25	20	150	45	3.5	18	13.1			
	2925-1.5	△	29	25	200	45	3.5	23	16.2			
	2016-2	△	20	16	125	35	4.5	15	12.4	HHA0512	WR40L	QCMB20□□ QCKB20□□ QPMB20□□
	2520-2	▲	25	20	150	45	4.5	18	14.0			
	2925-2	△	29	25	200	45	4.5	23	17.2			
	2016-2.5	▲	20	16	125	35	4.5	15	12.5	HHA0512	WR40L	QCMB25□□
	2520-2.5	△	25	20	150	45	4.5	18	15.1			
	2925-2.5	△	29	25	200	45	4.5	23	18.2			
	2520-3	▲	25	20	150	45	5	18	15.6	HHA0512	WR40L	QCMB30□□ QCKB30□□ QPMB30□□
	3125-3	△	31	25	200	45	6	23	18.9			
	3732-3	△	37	32	250	65	6	30	21.5			
	2520-4	△	35	20	150	45	6	18	15.6	HHA0512	WR40L	QCMB40□□ QCKB40□□ QPMB40□□
	3125-4	△	31	25	200	45	6	23	18.9			
	3732-4	▲	37	32	250	65	6	30	21.5			
3125-5	△	31	25	200	45	8	23	19.4	BHA0616	WR50L	QCMB50□□ QCKB50□□ QPMB50□□	
3732-5	△	37	32	250	65	8	30	21.5				
3125-6	△	31	25	200	45	8	23	19.4				
3732-6	△	37	32	250	65	8	30	21.5			QCMB60□□ QPMB60□□	

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Cutting speed recommendations for parting and grooving

ISO	Classification of materials		Hardness of Brinell (HB)	Tensile strength (N/mm ²)	Cutting Speed Recommendations (m/min)														
					HR8225			HR7115			HR7125			HR7225			HR6115		
					Feed (mm/rev)														
		0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.3	0.5	0.1	0.3	0.5			
P	Unalloyed steel	C ≤ 0.25%	Annealing	125	428	280	200	130				260	180	120	260	180	120		
		0.25 < C ≤ 0.55%	Annealing	190	639	240	160	115				220	150	105	200	140	105		
		0.25 < C ≤ 0.55%	Quenching and tempering	210	708	130	115	100				120	110	100	120	110	100		
		C > 0.55%	Annealing	190	639	145	130	115				130	120	110	130	120	110		
		C > 0.55%	Quenching and tempering	300	1013	115	100	80				110	95	70	110	95	70		
	Short chip steel	Annealing	220	745	130	115	100				120	105	90	120	105	90			
	Low-alloyed steel	Annealing		175	591	280	200	130				170	135	120	170	135	120		
		Quenching and tempering		300	1013	115	100	80				105	90	70	105	90	70		
		Quenching and tempering		380	1282	170	90	70				160	80	60	160	80	60		
		Quenching and tempering		430	430														
High-alloyed steel and high alloy tool steel	Annealing		200	675															
	Quenching and tempering		300	1013															
	Quenching and tempering		400	1361															
M	Stainless steel	Ferrite/martensite, annealing	200	675				200	150	105	200	150	105						
		Martensite, quenching and tempering	330	1114				150	115	70	150	115	70						
	Stainless steel	Austenite, quenching	200	675				165	135	105	185	155	125						
		Austenite, precipitation hardening stainless steel (PH stainless steel)	300	1013				155	120	80	165	135	95						
	Austenite-ferrite, duplex stainless steel	230	778				135	110	85	145	110	85							
K	Malleable cast iron	Ferrite	200	400										220	160	80			
		Pearlite	260	700										115	90	65			
	Grey cast iron	Low tensile strength	180	200										260	220	150			
		High tensile strength/austenite	245	350										240	200	130			
	Nodular iron	Ferrite	155	400										160	130	80			
		Pearlite	265	700										145	110	80			
	Compacted graphite iron GGV (CGI)	230	400										150	120	90				
S	Iron-based alloy	Iron-based	Annealing	200	680				60	50	40								
			Aged	280	940				60	50	40								
		Nickel-based or Cobalt-based	Annealing	250	840				50	40	30								
			Aged	350	1180				50	40	30								
		Casting	320	1080				50	40	30									
	Cobalt-based	Cobalt-based		200	680				200	160	120								
		α phase & β phase alloy, Aged		375	1260				80	60	40								
		β Phase alloy		410	1400				60	50	40								
Nickel-based alloy	1177	300	1010				40	35	30										
Titanium alloy	1262	300	1010				160	140	100										

Notes: 1. Cutting parameters are suitable for wet cutting.

2. For internal and section machining, it is recommended to reduce the cutting speed by 30%-50% Precautions for Parting and Grooving:

Precautions for parting and grooving:

Parting

- When the insert gets close to the center of the workpiece, the feed rate should be reduced by 30% for longer tool service life and good surface quality.
- If allowed, the overhang should be minimized to ensure good stability.

External grooving and turning, Profiling


- Pass sequence: When cutting depth > 0.5mm, radial feed (the maximum cutting depth can reach 0.75 x insert width S) → radial return about 0.1mm → axial pass → oblique return → axial pass → radial machining to the required depth.

Face grooving and turning

- Finish machining (multi-groove cutting)
Cutting inwards from the largest diameter, and the insert is slightly offset towards the central insert when returning the insert.
- Recess turning
Axial turning depth: $\leq 0.75 \times S$ (insert width)
If the groove width is greater than the depth, recess turning is recommended.
If the groove depth is greater than the width, multi-recess cutting is recommended.
- Finish machining
Machine the bottom and outer diameter edge in a finished way, and then the inner diameter to the required size.

Internal grooving and turning

- Please follow the machining sequence as shown.
In order to facilitate cutting outflow, please always feed outward from the far end face side.







A General turning
 Turning of small components
P Parting and grooving
 Threading
B Indexable milling
 Indexable milling
 Solid carbide end mill
C Short hole drill
 Short hole drill
 Solid carbide drill
 Solid carbide drill

A General turning
 Turning of small components
P Parting and grooving
 Threading
B Indexable milling
 Indexable milling
 Solid carbide end mill
C Short hole drill
 Short hole drill
 Solid carbide drill
 Solid carbide drill

A

Precautions for external parting, grooving and turning

S/N	Machining subjects	Precautions	Diagram
1	Grooving first and then transverse turning	When roughing (groove depth > 0.5mm), please do not adopt transverse feed machining immediately after grooving. Instead, return the insert about 0.1mm before starting transverse feed machining.	
		When finishing (groove depth < 0.5mm), the corner is subjected to small force, and transverse feed machining can be carried out immediately after grooving.	
2	Groove width expanding machining	Please stagger them into step shape for machining.	
	Finishing	(1) When machining towards the center side without using a center fixing, please lower the feeding speed. (2) A cutting depth more than 0.5mm on one side can effectively improve chip disposal.	

General turning




Turning of small components

Parting and grooving

Threading

B

Precautions for face grooving

S/N	Machining subjects	Precautions	Diagram
1	Precautions for cutter bar selection	(1) Choose the model that fits the groove width of the cut material. (2) Check the groove depth. (3) It is recommended to mount the cutter bar facing downwards (reversed).	
		Perform transverse feed machining from the outer section to the inner end face with good chip discharge.	
2	Face turning	When roughing (groove depth > 0.5mm), please do not feed transversely immediately after grooving. Instead, return the insert about 0.1mm before starting transverse feed machining.	
		When finishing (groove depth < 0.5mm), the corner is subjected to small force, and transverse feed machining can be carried out immediately after grooving. (No need to stop the knife)	

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A

Precautions for face grooving

S/N	Machining subjects	Precautions	Diagram
3	End face groove expansion machining	During rough machining, please stagger them into step shape for machining.	
		Finish machining: When the cutting depth is set to 0.5mm or above on one side, the chip disposal performs well.	

General turning


Turning of small components

Parting and grooving

Threading

B

FAQs of parting and grooving

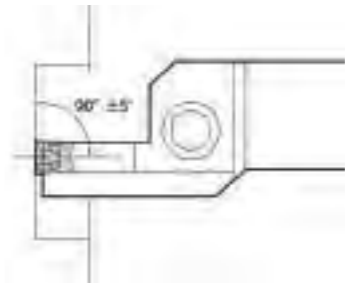Condition	Countermeasures
There is white turbidity at the bottom of the face	(1) Increase the cutting speed only in the finish machining. (2) When method 1 does not work, please readjust the parallelism of the insert and the corner. Correction method: Adjust the cutter bar to within $\pm 5^\circ$ tolerance of the perpendicularity between the cut-in angle and the material to be cut. 
When grooving, the tool gets entangled with chips.	(1) Install the cutter bar facing downwards (reversed). Please spray the coolant from the rear side of the insert to the corner. (2) When expanding the groove, please process it shallowly and extensively as a whole. (Deep recess machining cannot be done at the same time)
The insert collapses during the transverse feed machining.	Please replace the outside-inside machining by the inside-outside machining.
The recesses cannot be accessed vertically.	Please correct the parallelism of the corner Reduce the feeding speed.

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill


Threading

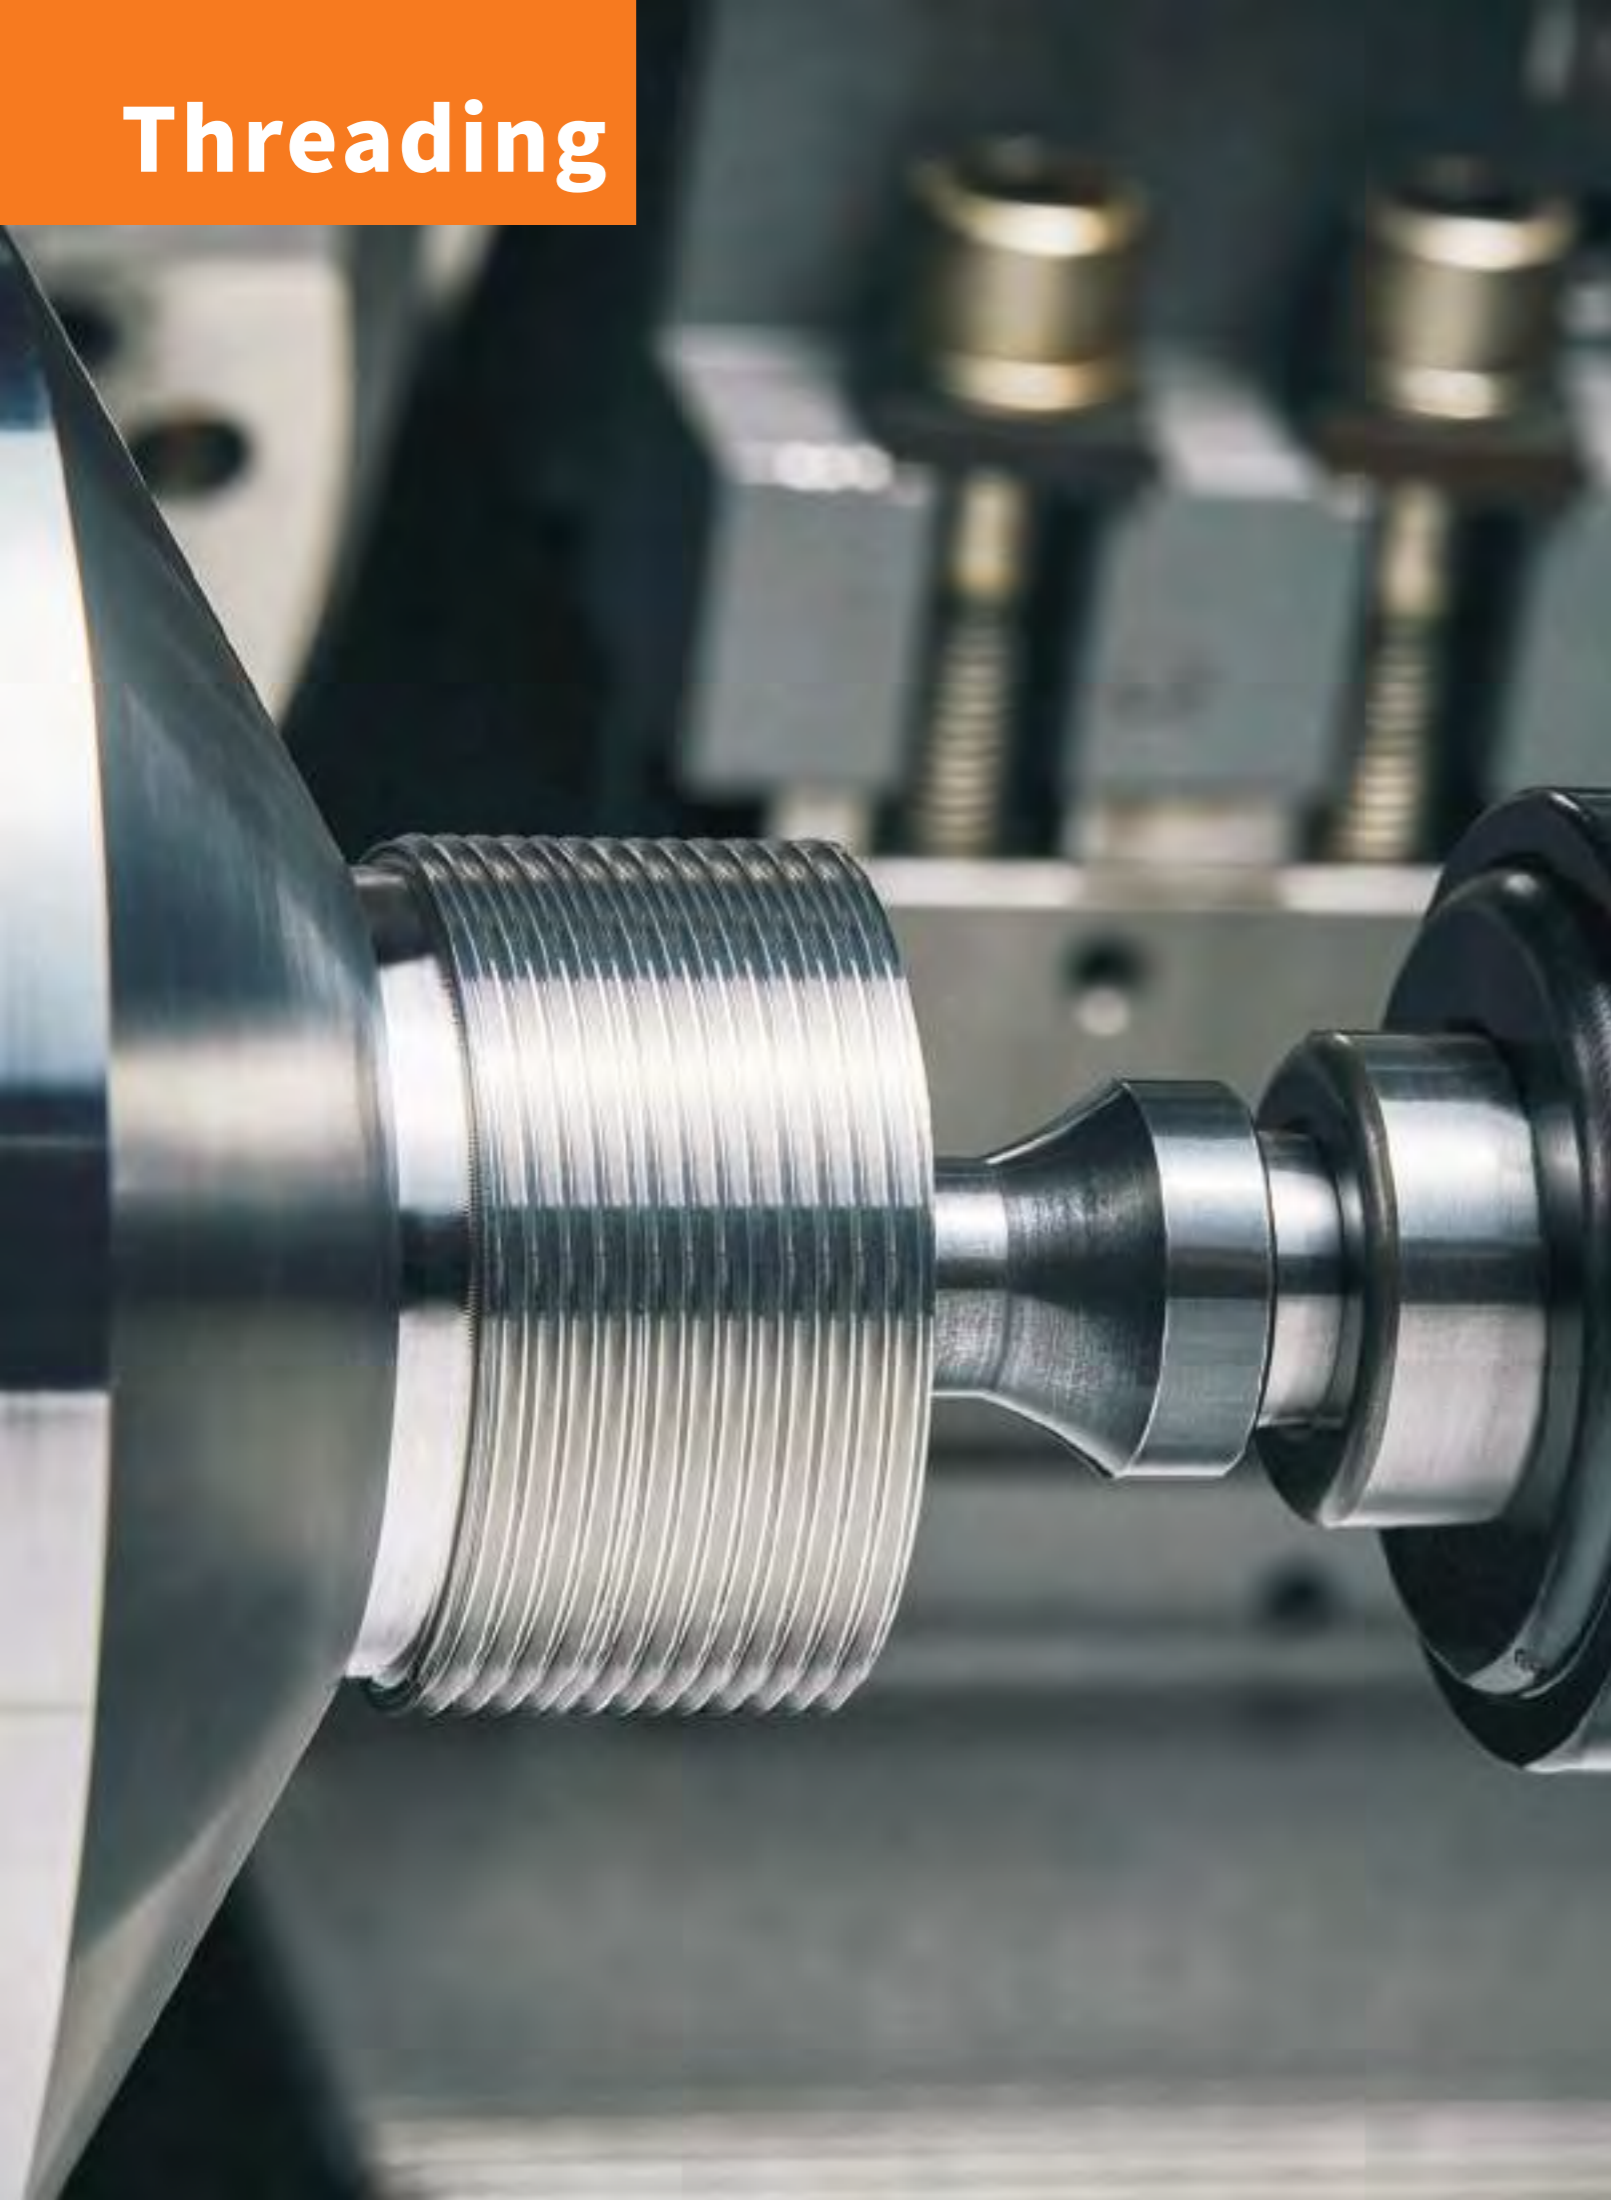


Turning

Thread turning

- ◆ Code key of thread insert A-161
- ◆ Overview of threading A-162
- ◆ Thread insert A-163
- ◆ Thread tools A-182
- ◆ Technical information for threading A-184

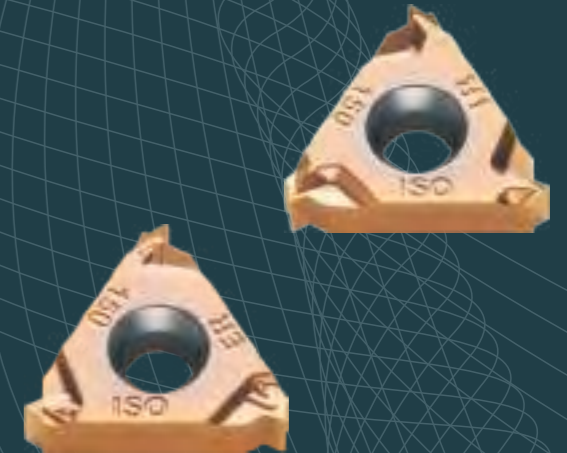

Code key of thread inserts

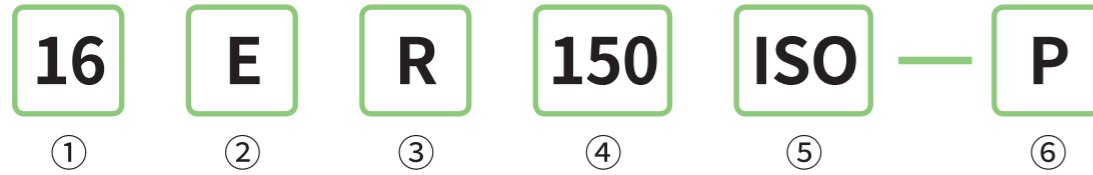

① Insert size (inch)

Code	Inscribed circle diameter
11	Φ6.35
16	Φ9.525
22	Φ12.70

② Cutting type

Code	Type
E	External threading
I	Internal threading

③ Cutting direction

Code	Direction
R	Right
L	Left

④ Thread pitch

Full form (indicated by pitch × 100)		
mm	TPI	
0.35-9.0	72-2	
V-profile (pitch indicated by letters)		
	mm	TPI
A	0.5-1.5	48-16
AG	0.5-3.0	48-8
G	1.75-3.0	14-8
N	3.5-5.0	7-5
Q	5.5-6.0	41/2-4

⑤ Thread type

Code	Type
ISO	ISO metric thread
UN	UN thread
W	Whitworth thread
BSPT	BSPT
NPT	NPT
TR	30° standard trapezoidal thread

⑥ Shaping method

Code	Type
default	Molded groove
P	Grinding groove

Overview of threading

Industry	Diagram	Thread type	Thread profile	Insert shape	pitch	number of teeth
General industry		ISO metric thread	ISO Metric 60° thread		1-6	4-25
General industry		Universal thread	55° universal pitch thread		0.5-5	5-51
			60° universal pitch thread			
General industry		Whitworth thread	W			8-28
Aerospace industry equipment		UN thread	UN			5-28
Pipe thread for gas, heating and tap water		BSPT	BSPT			11-28
For Pipeline connected with gas and tap water faucets		NPT	NPT			8-27
Transmission & Transportation equipment		30° Standard trapezoidal thread	TR		1.5-6.0	

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

ISO metric 60° thread (Molded)

Standard: R262 (DIN 13)
Tolerance class: 6g/6H

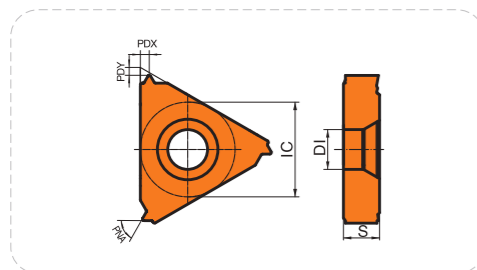

Working condition: ● Stable ● Average ■ Tough


Workpiece material	Stable	Average	Tough
P Steel	● ● ■ ■	● ● ■ ■	● ● ■ ■
M Stainless steel		● ● ■ ■	● ● ■ ■
K Cast iron			● ● ■ ■
N Non-ferrous metal			● ● ■ ■
S Heat resistant super alloys Titanium alloy			● ● ■ ■

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8135 HR8115	HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225	HRK10 HRK20	HRC10 HRT15C		
External threading		16ER100ISO	1.00	9.525	0.7	0.7	3.52	4.0	60°			☆ ★			
		16ER125ISO	1.25	9.525	0.9	0.8	3.52	4.0	60°			☆ ★			
		16ER150ISO	1.50	9.525	1.0	0.8	3.52	4.0	60°			☆ ★			
		16ER175ISO	1.75	9.525	1.2	0.9	3.52	4.0	60°			☆ ★			
		16ER200ISO	2.00	9.525	1.3	1.0	3.52	4.0	60°			☆ ★			
		16ER250ISO	2.50	9.525	1.5	1.2	3.52	4.0	60°			☆ ★			
		16ER300ISO	3.00	9.525	1.6	1.3	3.52	4.0	60°			☆ ★			
		22ER350ISO	3.50	12.700	2.3	1.6	4.65	5.0	60°			☆ ★			
		22ER400ISO	4.00	12.700	2.3	1.6	4.65	5.0	60°			☆ ★			
		22ER450ISO	4.50	12.700	2.4	1.7	4.65	5.0	60°			☆ ★			
		22ER500ISO	5.00	12.700	2.4	1.7	4.65	5.0	60°			☆ ★			
		22ER550ISO	5.50	12.700	2.5	1.6	4.65	5.0	60°			☆ ★			
		22ER600ISO	6.00	12.700	2.7	1.7	4.65	5.0	60°			☆ ★			

★ Recommended grade ☆ Available grade

ISO metric 60° thread (Molded)

Standard: R262 (DIN 13)
Tolerance class: 6g/6H

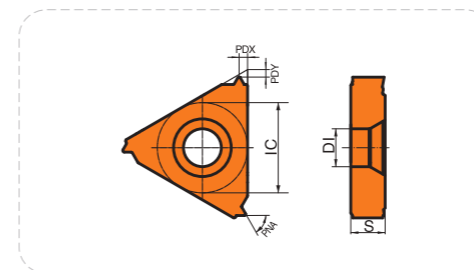

Working condition: ● Stable ● Average ■ Tough

Workpiece material	Stable	Average	Tough
P Steel	● ● ■ ■	● ● ■ ■	● ● ■ ■
M Stainless steel		● ● ■ ■	● ● ■ ■
K Cast iron			● ● ■ ■
N Non-ferrous metal			● ● ■ ■
S Heat resistant super alloys Titanium alloy			● ● ■ ■

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8135 HR8115	HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225	HRK10 HRK20	HRC10 HRT15C		
Internal threading		11IR100ISO	1.00	6.35	0.7	0.7	3.05	3.2	60°			☆ ★			
		11IR125ISO	1.25	6.35	0.9	0.8	3.05	3.2	60°			☆ ★			
		11IR150ISO	1.50	6.35	1.0	0.8	3.05	3.2	60°			☆ ★			
		16IR100ISO	1.00	9.525	0.7	0.7	3.52	4.0	60°			☆ ★			
		16IR125ISO	1.25	9.525	0.9	0.8	3.52	4.0	60°			☆ ★			
		16IR150ISO	1.50	9.525	1.0	0.8	3.52	4.0	60°			☆ ★			
		16IR175ISO	1.75	9.525	1.2	0.9	3.52	4.0	60°			☆ ★			
		16IR200ISO	2.00	9.525	1.3	1.0	3.52	4.0	60°			☆ ★			
		16IR250ISO	5.50	9.525	1.5	1.1	3.52	4.0	60°			☆ ★			
		16IR300ISO	3.00	9.525	1.5	1.1	3.52	4.0	60°			☆ ★			
		22IR350ISO	3.50	12.700	2.3	1.6	4.65	5.0	60°			☆ ★			
		22IR400ISO	4.00	12.700	2.3	1.6	4.65	5.0	60°			☆ ★			
		22IR450ISO	4.50	12.700	2.4	1.6	4.65	5.0	60°			☆ ★			
		22IR500ISO	5.00	12.700	2.4	1.6	4.65	5.0	60°			☆ ★			
		22IR550ISO	5.50	12.700	2.5	1.6	4.65	5.0	60°			☆ ★			
		22IR600ISO	6.00	12.700	2.5	1.8	4.65	5.0	60°			☆ ★			

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Universal thread (Molded)

Standard: B.S.84:1956, DIN 259, ISO228/1:1982
Tolerance class: Medium, A-class

Working condition: ● Stable ● Average ☐ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)							Workpiece material															
				Dimension (mm)							CVD		PVD		Cemented carbide		Cermets									
				IC	PDX	PDY	S	RE	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C
External threading		16ERA55	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	55°																
		16ERG55	1.75-3.0	9.525	1.7	1.2	3.52	0.23	4.0	55°																
		16ERAG55	0.5-3.0	9.525	1.7	1.2	3.52	0.06	4.0	55°																
		22ERN55	3.5-5.0	12.700	2.5	1.7	4.65	0.51	5.0	55°																
		16ERA60	0.5-1.5	9.525	0.9	0.8	3.52	0.06	4.0	60°																
		16ERG60	1.75-3.0	9.525	1.7	1.2	3.52	0.18	4.0	60°																
		16ERAG60	0.5-3.0	9.525	1.7	1.2	3.52	0.07	4.0	60°																
		22ERN60	3.5-5.0	12.700	2.5	1.7	4.65	0.51	5.0	60°																

★ Recommended grade ☆ Available grade

Whitworth thread (Molded)

Standard: B.S.84:1956, DIN 259, ISO228/1:1982
Tolerance class: Medium, A-class

Working condition: ● Stable ● Average ☐ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)							Workpiece material															
				Dimension (mm)							CVD		PVD		Cemented carbide		Cermets									
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C	
External threading		16ER8W	8	9.525	1.5	1.2	3.52	4.0	55°																	
		16ER11W	11	9.525	1.5	1.1	3.52	4.0	55°																	
		16ER12W	12	9.525	1.4	1.1	3.52	4.0	55°																	
		16ER14W	14	9.525	1.2	1.0	3.52	4.0	55°																	
		16ER19W	19	9.525	1.0	0.8	3.52	4.0	55°																	

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)							Workpiece material														
				Dimension (mm)							CVD		PVD		Cemented carbide		Cermets								
				IC	PDX	PDY	S	RE	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10
Internal threading		11IRA55	0.5-1.5	6.350	0.9	0.8	3.05	0.05	3.2	55°															
		16IRA55	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	55°															
		16IRG55	1.75-3.0	9.525	1.7	1.2	3.52	0.21	4.0	55°															
		16IRAG55	0.5-3.0	9.525	1.7	1.2	3.52	0.06	4.0	55°															
		22IRN55	3.5-5.0	12.700	2.5	1.7	4.65	0.26	5.0	55°															
		11IRA60	0.5-1.5	6.350	0.9	0.8	3.05	0.05	3.2	60°															
		16IRA60	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	60°															
		16IRG60	1.75-3.0	9.525	1.7	1.2	3.52	0.10	4.0	60°															
		16IRAG60	0.5-3.0	9.525	1.7	1.2	3.52	0.08	4.0	60°															
		22IRN60	3.5-5.0	12.700	2.5	1.7	4.65	0.26	5.0	60°															

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)							Workpiece material													
				Dimension (mm)							CVD		PVD		Cemented carbide		Cermets							
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10
Internal threading		16IR8W	8	9.525	1.5	1.2	3.52	4.0	55°															
		16IR11W	11	9.525	1.5	1.1	3.52	4.0	55°															
		16IR12W	12	9.525	1.4	1.1	3.52	4.0	55°															
		16IR14W	14	9.525	1.2	1.0	3.52	4.0	55°															
		16IR19W	19	9.525	1.0	0.8	3.52	4.0	55°															

★ Recommended grade ☆ Available grade

A

General turning

Tuning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Tuning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

UN united thread (Molded)

Standard: ANSI B1.1:74
Tolerance class: 2A/2B

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/number of teeth	Dimension (mm)						CVD			PVD		Cemented carbide	Cermet											
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
External threading		16ER8UN	8	9.525	1.7	1.2	3.52	4.0	60°	●	●	■	■	●		●											
		16ER12UN	12	9.525	1.4	1.1	3.52	4.0	60°					●		●											
		16ER14UN	14	9.525	1.2	1.0	3.52	4.0	60°					●		●											
		16ER16UN	16	9.525	1.1	0.9	3.52	4.0	60°					●		●											
		16ER18UN	18	9.525	1.1	0.8	3.52	4.0	60°					●		●											
		16ER20UN	20	9.525	1.1	0.8	3.52	4.0	60°					●		●											

Workpiece material: ● Steel ● Stainless steel ● Cast iron ● Non-ferrous metal ● Heat resistant super alloys Titanium alloy

★ Recommended grade ☆ Available grade

BSPT (Molded)

Standard: B.S.21:1985
Tolerance standard: BSPT

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/number of teeth	Dimension (mm)						CVD			PVD		Cemented carbide	Cermet										
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
External threading		16ER11BSPT	11	9.525	1.5	1.1	3.52	4.0	55°	●	●	■	■	●		●										
		16ER14BSPT	14	9.525	1.2	1.0	3.52	4.0	55°					●		●										
		16ER19BSPT	19	9.525	0.9	0.8	3.52	4.0	55°					●		●										

Workpiece material: ● Steel ● Stainless steel ● Cast iron ● Non-ferrous metal ● Heat resistant super alloys Titanium alloy

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/number of teeth	Dimension (mm)						CVD			PVD		Cemented carbide	Cermet										
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8135	HR8115	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
Internal threading		16IR8UN	8	9.525	1.7	1.2	3.52	4.0	60°	●	●	■	■	●		●										
		16IR12UN	12	9.525	1.4	1.1	3.52	4.0	60°					●		●										
		16IR14UN	14	9.525	1.2	1.0	3.52	4.0	60°					●		●										
		16IR16UN	16	9.525	1.1	0.9	3.52	4.0	60°					●		●										
		16IR18UN	18	9.525	1.1	0.8	3.52	4.0	60°					●		●										
		16IR20UN	20	9.525	1.1	0.8	3.52	4.0	60°					●		●										

Workpiece material: ● Steel ● Stainless steel ● Cast iron ● Non-ferrous metal ● Heat resistant super alloys Titanium alloy

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/number of teeth	Dimension (mm)						CVD			PVD		Cemented carbide	Cermet										
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C			
Internal threading		16IR11BSPT	11	9.525	1.5	1.1	3.52	4.0	55°	●	●	■	■	●		●										
		16IR14BSPT	14	9.525	1.2	1.0	3.52	4.0	55°					●		●										
		16IR19BSPT	19	9.525	0.9	0.8	3.52	4.0	55°					●		●										

Workpiece material: ● Steel ● Stainless steel ● Cast iron ● Non-ferrous metal ● Heat resistant super alloys Titanium alloy

★ Recommended grade ☆ Available grade


A
General turning
Tuning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

A
General turning
Tuning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill


ISO metric 60° thread (Grinding)

Standard: R262 (DIN 13)
Tolerance class: 6g/6H

Working condition: ● Stable ● Average ❏ Tough

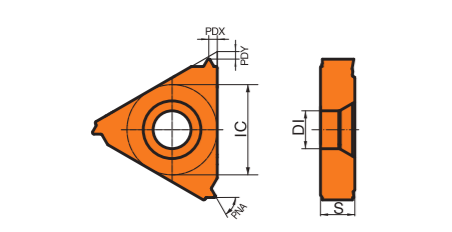

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
● Stable	●	●	●	●	●
● Average	●	●	●	●	●
❏ Tough	●	●	●	●	●


Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermert
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8135 HR8115	HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HRT15C				
Internal threading		11IR100ISO-P	1.00	6.35	0.7	0.7	3.05	3.2	60°				☆★		
		11IL100ISO-P	1.00	6.35	0.7	0.7	3.05	3.2	60°				☆★		
		11IR125ISO-P	1.25	6.35	0.9	0.8	3.05	3.2	60°				☆★		
		11IL125ISO-P	1.25	6.35	0.9	0.8	3.05	3.2	60°				☆★		
		11IR150ISO-P	1.50	6.35	1.0	0.8	3.05	3.2	60°				☆★		
		11IL150ISO-P	1.50	6.35	1.0	0.8	3.05	3.2	60°				☆★		
		11IR175ISO-P	1.75	6.35	1.2	0.9	3.05	3.2	60°				☆★		
		11IL175ISO-P	1.75	6.35	1.2	0.9	3.05	3.2	60°				☆★		
		11IR200ISO-P	2.00	6.35	1.3	0.9	3.05	3.2	60°				☆★		
		11IL200ISO-P	2.00	6.35	1.3	0.9	3.05	3.2	60°				☆★		
		11IR250ISO-P	2.50	6.35	1.5	1.0	3.05	3.2	60°				☆★		
		11IL250ISO-P	2.50	6.35	1.5	1.0	3.05	3.2	60°				☆★		
		16IR100ISO-P	1.00	9.525	0.7	0.7	3.52	4.0	60°				☆★		
		16IL100ISO-P	1.00	9.525	0.7	0.7	3.52	4.0	60°				☆★		
		16IR125ISO-P	1.25	9.525	0.9	0.8	3.52	4.0	60°				☆★		
		16IL125ISO-P	1.25	9.525	0.9	0.8	3.52	4.0	60°				☆★		
		16IR150ISO-P	1.50	9.525	1.0	0.8	3.52	4.0	60°				☆★		
		16IL150ISO-P	1.50	9.525	1.0	0.8	3.52	4.0	60°				☆★		
		16IR175ISO-P	1.75	9.525	1.2	0.9	3.52	4.0	60°				☆★		
		16IL175ISO-P	1.75	9.525	1.2	0.9	3.52	4.0	60°				☆★		
		16IR200ISO-P	2.00	9.525	1.3	1.0	3.52	4.0	60°				☆★		
		16IL200ISO-P	2.00	9.525	1.3	1.0	3.52	4.0	60°				☆★		
		16IR250ISO-P	2.50	9.525	1.5	1.1	3.52	4.0	60°				☆★		
		16IL250ISO-P	2.50	9.525	1.5	1.1	3.52	4.0	60°				☆★		
		16IR300ISO-P	3.00	9.525	1.5	1.1	3.52	4.0	60°				☆★		
		16IL300ISO-P	3.00	9.525	1.5	1.1	3.52	4.0	60°				☆★		

★ Recommended grade ☆ Available grade


ISO metric 60° thread (Grinding)

Standard: R262 (DIN 13)
Tolerance class: 6g/6H

Working condition: ● Stable ● Average ❏ Tough

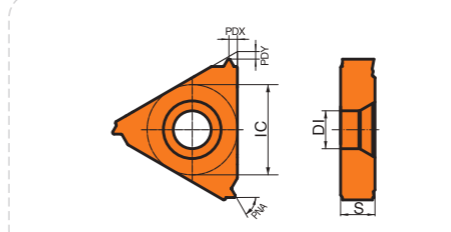

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
● Stable	●	●	●	●	●
● Average	●	●	●	●	●
❏ Tough	●	●	●	●	●


Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermert
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8135 HR8115	HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HRT15C				
Internal threading		22IR350ISO-P	3.50	12.700	2.3	1.6	4.65	5.0	60°				☆★		
		22IL350ISO-P	3.50	12.700	2.3	1.6	4.65	5.0	60°				☆★		
		22IR400ISO-P	4.00	12.700	2.3	1.6	4.65	5.0	60°				☆★		
		22IL400ISO-P	4.00	12.700	2.3	1.6	4.65	5.0	60°				☆★		
		22IR450ISO-P	4.50	12.700	2.4	1.6	4.65	5.0	60°				☆★		
		22IL450ISO-P	4.50	12.700	2.4	1.6	4.65	5.0	60°				☆★		
		22IR500ISO-P	5.00	12.700	2.4	1.6	4.65	5.0	60°				☆★		
		22IL500ISO-P	5.00	12.700	2.4	1.6	4.65	5.0	60°				☆★		
		22IR550ISO-P	5.50	12.700	2.5	1.7	4.65	5.0	60°				☆★		
		22IL550ISO-P	5.50	12.700	2.5	1.7	4.65	5.0	60°				☆★		
		22IR600ISO-P	6.00	12.700	2.5	1.8	4.65	5.0	60°				☆★		
		22IL600ISO-P	6.00	12.700	2.5	1.8	4.65	5.0	60°				☆★		

★ Recommended grade ☆ Available grade

A

Universal thread (Grinding)

Standard: B.S.84:1956, DIN 259, ISO228/1:1982
Tolerance class: Medium, A-class

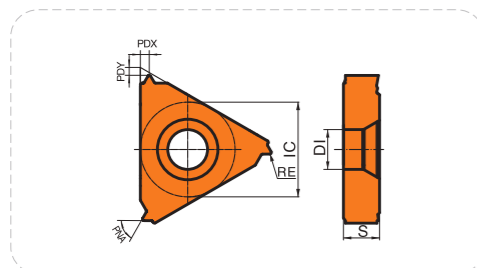

Working condition: ● Stable ● Average ☐ Tough


Workpiece material	●	●	☐	☐	●	●	☐	☐	●	●
P Steel	●	●	☐	☐	●	●	☐	☐	●	●
M Stainless steel					●	●	☐	☐		
K Cast iron					●	●	☐	☐		
N Non-ferrous metal									●	●
S Heat resistant super alloys Titanium alloy					●	●				

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)							CVD	PVD	Cemented carbide	Cermets										
				IC	PDX	PDY	S	RE	DI	PNA														
External threading		16ERA55-P	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	55°														
		16ELA55-P	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	55°														
		16ERG55-P	1.75-3.0	9.525	1.7	1.2	3.52	0.23	4.0	55°														
		16ELG55-P	1.75-3.0	9.525	1.7	1.2	3.52	0.23	4.0	55°														
		16ERAG55-P	1.75-3.0	9.525	1.7	1.2	3.52	0.23	4.0	55°														
		22ERN55-P	3.5-5.0	12.700	2.5	1.7	3.52	0.44	4.0	55°														
		22ELN55-P	3.5-5.0	12.700	2.5	1.7	3.52	0.44	4.0	55°														
		16ERA60-P	0.5-1.5	9.525	0.9	0.8	3.52	0.06	4.0	60°														
		16ELA60-P	0.5-1.5	9.525	0.9	0.8	3.52	0.06	4.0	60°														
		16ERG60-P	1.75-3.0	9.525	1.7	1.2	3.52	0.18	4.0	60°														
		16ELG60-P	1.75-3.0	9.525	1.7	1.2	3.52	0.18	4.0	60°														
		16ERAG60-P	0.5-3.0	9.525	1.7	1.2	3.52	0.07	4.0	60°														
		16ELAG60-P	0.5-3.0	9.525	1.7	1.2	3.52	0.07	4.0	60°														
		22ERN60-P	3.5-5.0	12.700	2.5	1.7	3.52	0.51	4.0	60°														
		22ELN60-P	3.5-5.0	12.700	2.5	1.7	3.52	0.51	4.0	60°														

★ Recommended grade ☆ Available grade

Universal thread (Grinding)

Standard: B.S.84:1956, DIN 259, ISO228/1:1982
Tolerance class: Medium, A-class

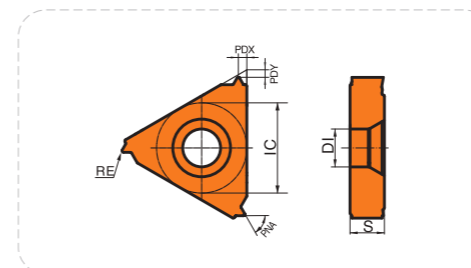

Working condition: ● Stable ● Average ☐ Tough

Workpiece material	●	●	☐	☐	●	●	☐	☐	●	●
P Steel	●	●	☐	☐	●	●	☐	☐	●	●
M Stainless steel					●	●	☐	☐		
K Cast iron					●	●	☐	☐		
N Non-ferrous metal									●	●
S Heat resistant super alloys Titanium alloy					●	●				

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)							CVD	PVD	Cemented carbide	Cermets										
				IC	PDX	PDY	S	RE	DI	PNA														
Internal threading		16IRA55-P	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	55°														
		16ILA55-P	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	55°														
		16IRG55-P	1.75-3.0	9.525	1.7	1.2	3.52	0.21	4.0	55°														
		16ILG55-P	1.75-3.0	9.525	1.7	1.2	3.52	0.21	4.0	55°														
		16IRAG55-P	1.75-3.0	9.525	1.7	1.2	3.52	0.21	4.0	55°														
		16IRN55-P	3.5-5.0	9.525	2.5	1.7	3.52	0.43	4.0	55°														
		16ILN55-P	3.5-5.0	9.525	2.5	1.7	3.52	0.43	4.0	55°														
		16IRA60-P	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	60°														
		16ILA60-P	0.5-1.5	9.525	0.9	0.8	3.52	0.05	4.0	60°														
		16IRG60-P	1.75-3.0	9.525	1.7	1.2	3.52	0.10	4.0	60°														
		16ILG60-P	1.75-3.0	9.525	1.7	1.2	3.52	0.10	4.0	60°														
		16IRAG60-P	0.5-3.0	9.525	1.7	1.2	3.52	0.08	4.0	60°														
		16ILAG60-P	0.5-3.0	9.525	1.7	1.2	3.52	0.08	4.0	60°														
		16IRN60-P	3.5-5.0	9.525	2.5	1.7	3.52	0.26	4.0	60°														
		22ILN60-P	3.5-5.0	9.525	2.5	1.7	3.52	0.26	4.0	60°														

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill


Solid carbide drill

A174

Whitworth thread (Grinding)

Standard: B.S.84:1956, DIN 259, ISO 228/1:1982
Tolerance class: Medium, A-class

Working condition: ● Stable ● Average ■ Tough

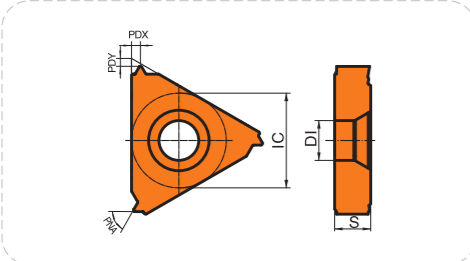

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
● Stable	●	●	●	●	●
● Average	■	■	■	■	■
■ Tough	■	■	■	■	■


Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet													
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C		
External threading		16ER8W-P	8	9.525	1.5	1.2	3.52	4.0	55°											☆ ★								
		16ER9W-P	9	9.525	1.7	1.2	3.52	4.0	55°												☆ ★							
		16ER10W-P	10	9.525	1.5	1.1	3.52	4.0	55°												☆ ★							
		16ER11W-P	11	9.525	1.5	1.1	3.52	4.0	55°												☆ ★							
		16ER12W-P	12	9.525	1.4	1.1	3.52	4.0	55°												☆ ★							
		16ER14W-P	14	9.525	1.2	1.0	3.52	4.0	55°												☆ ★							
		16ER16W-P	16	9.525	1.1	0.9	3.52	4.0	55°												☆ ★							
		16ER18W-P	18	9.525	1.0	0.8	3.52	4.0	55°												☆ ★							
		16ER19W-P	19	9.525	1.0	0.8	3.52	4.0	55°												☆ ★							
		16ER20W-P	20	9.525	0.9	0.8	3.52	4.0	55°												☆ ★							
		16ER26W-P	26	9.525	0.8	0.7	3.52	4.0	55°												☆ ★							
		16ER28W-P	28	9.525	0.7	0.6	3.52	4.0	55°												☆ ★							

★ Recommended grade ☆ Available grade

Whitworth thread (Grinding)

Standard: B.S.84:1956, DIN 259, ISO 228/1:1982
Tolerance class: Medium, A-class

Working condition: ● Stable ● Average ■ Tough

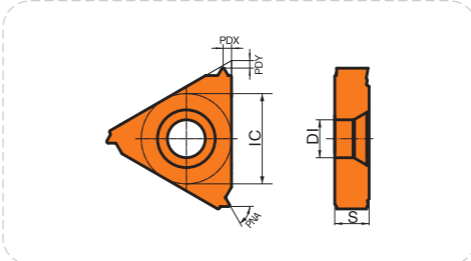

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
● Stable	●	●	●	●	●
● Average	■	■	■	■	■
■ Tough	■	■	■	■	■

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet												
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C	
Internal threading		11IR14W-P	14	6.350	1.0	0.8	3.05	3.2	55°											☆ ★							
		11IR19W-P	19	6.350	1.2	1.0	3.05	3.2	55°											☆ ★							
		16IR8W-P	8	9.525	1.5	1.2	3.52	4.0	55°											☆ ★							
		16IR9W-P	9	9.525	1.7	1.2	3.52	4.0	55°											☆ ★							
		16IR10W-P	10	9.525	1.5	1.1	3.52	4.0	55°											☆ ★							
		16IR11W-P	11	9.525	1.5	1.1	3.52	4.0	55°											☆ ★							
		16IR12W-P	12	9.525	1.4	1.1	3.52	4.0	55°											☆ ★							
		16IR14W-P	14	9.525	1.2	1.0	3.52	4.0	55°											☆ ★							
		16IR16W-P	16	9.525	1.1	0.9	3.52	4.0	55°											☆ ★							
		16IR18W-P	18	9.525	1.0	0.8	3.52	4.0	55°											☆ ★							
		16IR19W-P	19	9.525	1.0	0.8	3.52	4.0	55°											☆ ★							
		16IR20W-P	20	9.525	0.9	0.8	3.52	4.0	55°											☆ ★							
		16IR26W-P	26	9.525	0.8	0.7	3.52	4.0	55°											☆ ★							
		16IR28W-P	28	9.525	0.7	0.6	3.52	4.0	55°											☆ ★							

★ Recommended grade ☆ Available grade

A

UN united thread (Grinding)

Standard: ANSI B1.1:74
Tolerance class: 2A/2B

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet									
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8135	HR6115	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C	
				External threading		16ER8UN-P	8	9.525	1.7	1.2	3.52	4.0	60°									☆	★	
		16ER12UN-P	12	9.525	1.4	1.1	3.52	4.0	60°									☆	★					
		16ER14UN-P	14	9.525	1.2	1.0	3.52	4.0	60°									☆	★					
		16ER16UN-P	16	9.525	1.1	0.9	3.52	4.0	60°									☆	★					
		16ER18UN-P	18	9.525	1.1	0.8	3.52	4.0	60°									☆	★					
		16ER20UN-P	20	9.525	1.1	0.8	3.52	4.0	60°									☆	★					

Workpiece material: ● Steel (P), ● Stainless steel (M), ● Cast iron (K), ● Non-ferrous metal (N), ● Heat resistant super alloys Titanium alloy (S)

★ Recommended grade ☆ Available grade

BSPT (Grinding)

Standard: B.S.21:1985
Tolerance class: BSPT

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet										
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C
				External threading		16ER11BSPT-P	11	9.525	1.5	1.1	3.52	4.0	55°											☆	★
		16ER14BSPT-P	14	9.525	1.2	1.0	3.52	4.0	55°											☆	★				
		16ER19BSPT-P	19	9.525	0.9	0.8	3.52	4.0	55°											☆	★				
		16ER28BSPT-P	28	9.525	0.6	0.6	3.52	4.0	55°											☆	★				

Workpiece material: ● Steel (P), ● Stainless steel (M), ● Cast iron (K), ● Non-ferrous metal (N), ● Heat resistant super alloys Titanium alloy (S)

★ Recommended grade ☆ Available grade

B

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A177

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet										
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C
				Internal threading		11IR14UN-P	14	6.35	1	0.8	3.05	3.2	60°											☆	★
		11IR18UN-P	18	6.35	1	0.8	3.05	3.2	60°											☆	★				
		11IR20UN-P	20	6.35	1	0.8	3.05	3.2	60°											☆	★				
		16IR8UN-P	8	9.525	1.7	1.2	3.52	4.0	60°											☆	★				
		16IR12UN-P	12	9.525	1.4	1.1	3.52	4.0	60°											☆	★				
		16IR14UN-P	14	9.525	1.2	1.0	3.52	4.0	60°											☆	★				
		16IR16UN-P	16	9.525	1.1	0.9	3.52	4.0	60°											☆	★				
		16IR18UN-P	18	9.525	1.1	0.8	3.52	4.0	60°											☆	★				
		16IR20UN-P	20	9.525	1.1	0.8	3.52	4.0	60°											☆	★				

Workpiece material: ● Steel (P), ● Stainless steel (M), ● Cast iron (K), ● Non-ferrous metal (N), ● Heat resistant super alloys Titanium alloy (S)

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A178

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet										
				IC	PDX	PDY	S	DI	PNA	HR8105	HR8115	HR8125	HR8225	HR8135	HR6115	HR1135	HR9105	HR7115	HR7125	HR5125	HR5225	HRK10	HRK20	HRC10	HR115C
				Internal threading		11IR14BSPT-P	14	6.35	1.2	0.8	3.05	3.2	55°											☆	★
		11IR19BSPT-P	19	6.35	1.0	0.8	3.05	3.2	55°											☆	★				
		11IR28BSPT-P	28	6.35	0.8	0.6	3.05	3.2	55°											☆	★				
		16IR11BSPT-P	11	9.525	1.5	1.1	3.52	4.0	55°											☆	★				
		16IR14BSPT-P	14	9.525	1.2	1.0	3.52	4.0	55°											☆	★				
		16IR19BSPT-P	19	9.525	0.9	0.8	3.52	4.0	55°											☆	★				
		16IR28BSPT-P	28	9.525	0.6	0.6	3.52	4.0	55°											☆	★				

Workpiece material: ● Steel (P), ● Stainless steel (M), ● Cast iron (K), ● Non-ferrous metal (N), ● Heat resistant super alloys Titanium alloy (S)

★ Recommended grade ☆ Available grade

NPT (Grinding)

Standard: USAS B2.1:1968
Tolerance class: NPT

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C				
External threading		16ER8NPT-P	8	9.525	1.8	1.3	3.52	4.0	60°						
		16ER115NPT-P	11.5	9.525	1.5	1.1	3.52	4.0	60°						
		16ER14NPT-P	14	9.525	1.2	0.9	3.52	4.0	60°						
		16ER18NPT-P	18	9.525	1.0	0.8	3.52	4.0	60°						
		16ER27NPT-P	27	9.525	0.8	0.7	3.52	4.0	60°						

★ Recommended grade ☆ Available grade

30°Standard trapezoidal thread

Standard: DIN103-2-1977
Tolerance class: 7e7H screw thread

Working condition: ● Stable ● Average ■ Tough

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C				
External threading		16ER150TR-P	1.50	9.53	0.80	0.70	3.52	4.00	30°						
		16EL150TR-P	1.50	9.53	0.80	0.70	3.52	4.00	30°						
		16ER200TR-P	2.00	9.53	1.30	1.10	3.52	4.00	30°						
		16EL200TR-P	2.00	9.53	1.30	1.10	3.52	4.00	30°						
		16ER300TR-P	3.00	9.53	1.30	1.10	3.52	4.00	30°						
		16EL300TR-P	3.00	9.53	1.30	1.10	3.52	4.00	30°						
		22ER400TR-P	4.00	12.70	2.30	1.80	4.65	5.00	30°						
		22EL400TR-P	4.00	12.70	2.30	1.80	4.65	5.00	30°						
		22ER500TR-P	5.00	12.70	2.30	1.80	4.65	5.00	30°						
		22EL500TR-P	5.00	12.70	2.30	1.80	4.65	5.00	30°						
		22ER600TR-P	6.00	12.70	2.30	1.90	4.65	5.00	30°						
		22EL600TR-P	6.00	12.70	2.30	1.90	4.65	5.00	30°						

★ Recommended grade ☆ Available grade

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD		PVD		Cemented carbide	Cermet
				IC	PDX	PDY	S	DI	PNA	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C	HR8105 HR8115 HR8125 HR8225 HR8135 HR6115 HR1135 HR9105 HR7115 HR7125 HR7225 HR5125 HR5225 HRK10 HRK20 HRC10 HR115C				
Internal threading		111R14NPT-P	14	6.35	1.2	0.9	3.05	3.2	60°						
		111R18NPT-P	18	6.35	1.0	0.8	3.05	3.2	60°						
		111R27NPT-P	27	6.35	0.8	0.6	3.05	3.2	60°						
		161R8NPT-P	8	9.525	1.8	1.3	3.52	4.0	60°						
		161R115NPT-P	11.5	9.525	1.5	1.1	3.52	4.0	60°						
		161R14NPT-P	14	9.525	1.2	0.9	3.52	4.0	60°						
		161R18NPT-P	18	9.525	1.0	0.8	3.52	4.0	60°						
		161R27NPT-P	27	9.525	0.8	0.7	3.52	4.0	60°						

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A

30° Standard trapezoidal thread

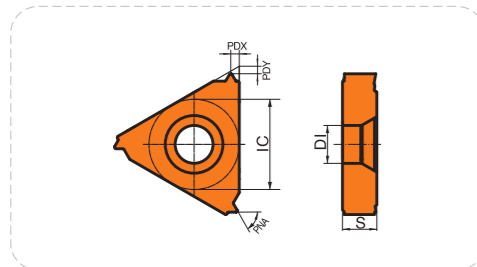


Working condition: ● Stable ● Average ■ Tough

Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy
Steel	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■
Stainless steel	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■
Cast iron	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■
Non-ferrous metal	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■
Heat resistant super alloys Titanium alloy	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■	● ● ● ■ ■ ■ ■ ■

Processing	Insert shape	Type	Pitch/ number of teeth	Dimension (mm)						CVD	PVD	Cemented carbide	Cermet														
				IC	PDX	PDY	S	DI	PNA																		
Internal threading		16IR150TR-P	1.50	9.53	0.80	0.70	3.52	4.00	30°	HR8105	HR8115	HR8125	HR8225	HR8135	HR8115	HR1135	HR9105	HR7115	HR7125	HR7225	HR5125	HR5225	HRK10	HRK20	HRC10	HRT15C	
		16IL150TR-P	1.50	9.53	0.80	0.70	3.52	4.00	30°													☆ ★					
		16IR200TR-P	2.00	9.53	1.30	1.10	3.52	4.00	30°														☆ ★				
		16IL200TR-P	2.00	9.53	1.30	1.10	3.52	4.00	30°														☆ ★				
		16IR300TR-P	3.00	9.53	1.30	1.10	3.52	4.00	30°														☆ ★				
		16IL300TR-P	3.00	9.53	1.30	1.10	3.52	4.00	30°														☆ ★				
		22IR400TR-P	4.00	12.70	2.30	1.80	4.65	5.00	30°														☆ ★				
		22IL400TR-P	4.00	12.70	2.30	1.80	4.65	5.00	30°														☆ ★				
		22IR500TR-P	5.00	12.70	2.30	1.80	4.65	5.00	30°														☆ ★				
		22IL500TR-P	5.00	12.70	2.30	1.80	4.65	5.00	30°														☆ ★				
		22IR600TR-P	6.00	12.70	2.30	1.90	4.65	5.00	30°														☆ ★				
		22IL600TR-P	6.00	12.70	2.30	1.90	4.65	5.00	30°														☆ ★				

★ Recommended grade ☆ Available grade

External threading tools

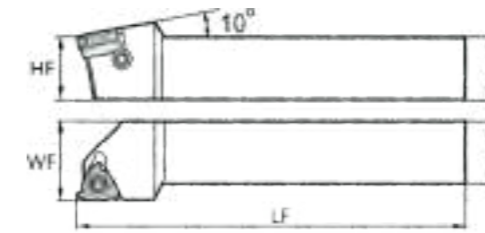

Type	Inventory	Dimension (mm)					Accessories					
		H	HF	B	LF	WF	Insert screw	Shim	Shim screw	Wrench	Matching insert	
SWR	2020K16	△	20	20	20	125	25	M3.5 × 12	HT16-□□M	HM4 × 8C	WR15	16□□
	2525M16	▲	25	25	25	150	32					
	3232P16	△	32	32	32	170	40					
	2525M22	▲	25	25	25	150	32	M5 × 17	HT22-□□M	HM5 × 8.5	WR20	22□□
	3232P22	△	32	32	32	170	40					
SWL	2020K16	△	20	20	20	125	25	M3.5 × 12	HT16-□□M	HM4 × 8C	WR15	16□□
	2525M16	▲	25	25	25	150	32					
	3232P16	△	32	32	32	170	40					
	2525M22	▲	25	25	25	150	32	M5 × 17	HT22-□□M	HM5 × 8.5	WR20	22□□
	3232P22	△	32	32	32	170	40					

★ Recommended grade ☆ Available grade

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

A

Internal threading tools

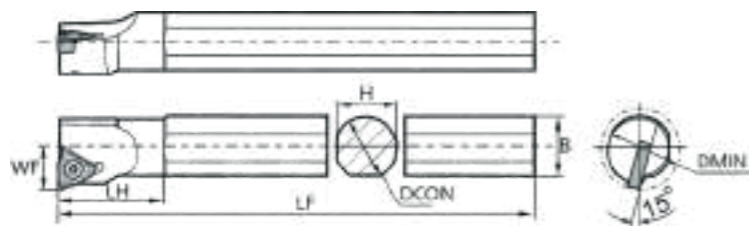

Type	Inventory	Dimension (mm)								Accessories				
		DCON	LF	B	DMIN	WF	H	LH	Insert screw	Shim	Shim screw	Wrench	Matching insert	
SWR	0016K11	△	16	125	16	12	10	15	20.9	M2.5 × 6.5	-	-	WR07	11□□
	0016M11	▲	16	150	15.5	16	10.5	15	25.9					
	0016M16	△	16	150	15.5	20	12	15	27	M3.5 × 8	-	-	WR15	16□□
	0020M16	△	20	150	19	25	14	18	28.7					
	0020Q16	△	20	180	19	25	14	18	34	M3.5 × 12	HT16-□□M	HM4 × 8	WR15	16□□
	0025M16	▲	25	150	24	32	17	23	28.8					
	0032R16	△	32	200	31	40	22	30	30.9	M5 × 10	-	-	WR20	22□□
	0032S16	△	32	250	31	40	22	30	30.9					
	0020Q22	△	20	180	21.5	25	15	18	35	M5 × 17	HT22-□□M	HM4 × 8	WR20	22□□
	0025R22	▲	25	200	24	32	19	23	39					
0032S22	△	32	250	31	40	22	30	36.4						
SWL	0016K11	△	16	125	16	12	10	15	20.9	M2.5 × 6.5	-	-	WR07	11□□
	0016M11	▲	16	150	15.5	16	10.5	15	25.9					
	0016M16	△	16	150	15.5	20	12	15	27	M3.5 × 8	-	-	WR15	16□□
	0020M16	△	20	150	19	25	14	18	28.7					
	0020Q16	△	20	180	19	25	14	18	34	M3.5 × 12	HT16-□□M	HM4 × 8	WR15	16□□
	0025M16	▲	25	150	24	32	17	23	28.8					
	0032R16	△	32	200	31	40	22	30	30.9	M5 × 10	-	-	WR20	22□□
	0032S16	△	32	250	31	40	22	30	30.9					
	0020Q22	△	20	180	21.5	25	15	18	35	M5 × 17	HT22-□□M	HM4 × 8	WR20	22□□
	0025R22	▲	25	200	24	32	19	23	39					
0032S22	△	32	250	31	40	22	30	36.4						


★ Recommended grade ☆ Available grade

Selection of shim and helix angle

The helix angle is dependent on and related to the diameter and pitch of the thread. During thread turning, due to the influence of the helix angle, it will cause the change of the cutting position of base surface, so that the rake angle and clearance shows different cutting factor. The larger the helix angle, the effect much more obvious. Therefore, the influence of helix angle must be considered for better machining outcome.

$$e = \arctan \frac{p}{d_2 \times \pi}$$

e = Helix angle

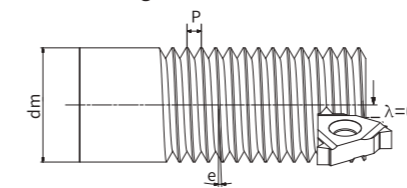

P = pitch

d₂ = diameter of thread

The most common angle of inclination is 1°

Clearance calculation


Clearance calculation formula

$$\beta = \arctan (\tan \theta \times \tan \alpha)$$

2θ = thread tooth angle

α = Rake angle of tool. External thread 10°, Internal thread 15°

λ = inclination angle

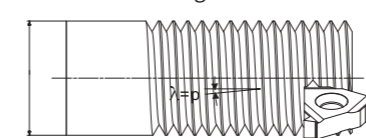

Helix angle < clearance angle of tools. Better switch shim, the different between helix angle and inclination angle of shim adjust to 0°-2°.

Spl: P=1.5, d₂=24mm

Helix angle 1.14° (2°~0°) = inclination angle (-0.86°~1.14°) apply standard 1° shim.

The following table is used for specific values


thread tooth angle 2θ	β	
	internal thread	external thread
60°	5.8°	8.79°
55°	5.24°	7.94°
30°	2.7°	4.1°

Specification table of shim

pitch	insert size	Inclination angle	Shim
0.5-3.0	16	0	HT16-00M
		1	HT16-01M
		2	HT16-02M
		3	HT16-03M
3.5-6.0	22	0	HT22-00M
		1	HT22-01M
		2	HT22-02M
		3	HT22-03M

Note: The standard of shim is 1° for threading tool (MT16-01M or MT22-01M)

Selection of shim

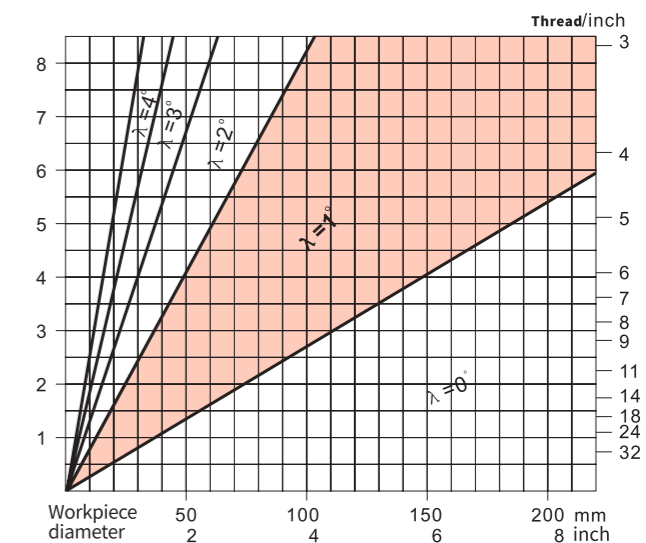

A

General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

Cutting speed recommendations for threading

Workpiece materials					Application scope of Huareal turning grade (HR5225)		
ISO	Classification of materials		Hardness of Brinell (HB)	Tensile strength (N/mm ²)	Cutting speed Vc (m/min)		
					HR5125	HR5225	
P	Unalloyed steel	C ≤ 0.25%	Annealing	125	428	160-180	168-185
		0.25 < C ≤ 0.55%	Annealing	190	639	150-160	155-165
		0.25 < C ≤ 0.55%	Quenching and tempering	210	708	145-155	155-165
		C > 0.55%	Annealing	190	639	135-150	140-155
		C > 0.55%	Quenching and tempering	300	1013	120-140	125-140
	Low-alloyed steel	Annealing		175	591	120-140	130-145
		Quenching and tempering		300	1013	90-110	95-115
		Quenching and tempering		380	1282	80-100	85-100
		Quenching and tempering		430	430	70-95	80-95
	High-alloyed steel	Annealing		200	675	90-120	98-125
Quenching and tempering		300	1013	80-100	85-110		
M	Stainless steel	Austenite		180	675	120-140	120-140
		Martensite/ferrite		200	778	140-180	145-180
K	Malleable cast iron	Ferrite		200	400	120-145	130-145
		Pearlite		260	700	80-115	85-120
	Grey cast iron	Low tensile strength		180	200	115-150	110-160
		High tensile strength/austenite		245	350	90-115	90-125
	Nodular iron	Ferrite		155	400	110-130	110-140
Pearlite		265	700	90-115	95-120		
N	Wrought aluminum alloy	Non-aging		60	—	1000-1400	1100-1500
		Aged		100	340	500-600	550-650
	Foundry aluminum alloy	Non-aging		75	260	450-500	450-550
		Aged		90	310	300-400	320-450
S	Nickel-based alloy	Nickel-based	Annealing	200	680	35-50	35-55
			Aged	280	940	25-35	25-40
		Nickel-based or cobalt-based	Annealing	250	840	20-30	22-35
			Aged	350	1180	10-25	10-30
		Casting	320	1080	10-20	10-25	
	Titanium alloy	1262		300	1010	20-25	20-30
H	Hardened steel	Quenching and tempering		50HRC		60-70	60-75
		Quenching and tempering		55HRC		40-50	45-55
		Quenching and tempering		60HRC		30-40	30-48

Feed rate recommendation table

ISO Metric 60° external thread

Pitch (mm)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
0.50	0.31	0.10	0.08	0.07	0.06										
0.75	0.46	0.16	0.14	0.10	0.06										
1.00	0.61	0.18	0.15	0.12	0.10	0.06									
1.25	0.77	0.19	0.17	0.14	0.11	0.10	0.06								
1.50	0.92	0.22	0.21	0.17	0.14	0.12	0.06								
1.75	1.07	0.22	0.21	0.16	0.13	0.11	0.09	0.09	0.06						
2.00	1.23	0.24	0.23	0.17	0.16	0.14	0.12	0.11	0.06						
2.50	1.53	0.26	0.23	0.19	0.17	0.15	0.13	0.12	0.11	0.06					
3.00	1.84	0.27	0.25	0.20	0.18	0.16	0.14	0.13	0.12	0.12	0.11	0.10	0.06		
3.50	2.15	0.33	0.30	0.24	0.21	0.18	0.17	0.15	0.14	0.14	0.12	0.11	0.06		
4.00	2.45	0.34	0.31	0.24	0.22	0.19	0.17	0.16	0.14	0.14	0.13	0.12	0.12	0.11	0.06
4.50	2.76	0.38	0.34	0.28	0.24	0.22	0.20	0.18	0.16	0.16	0.15	0.14	0.13	0.12	0.06
5.00	3.07	0.42	0.38	0.32	0.27	0.24	0.22	0.20	0.18	0.18	0.17	0.16	0.15	0.12	0.06
5.50	3.35	0.43	0.40	0.38	0.36	0.32	0.28	0.24	0.20	0.16	0.16	0.15	0.14	0.12	0.06
6.00	3.82	0.44	0.42	0.40	0.38	0.34	0.30	0.30	0.28	0.25	0.18	0.17	0.16	0.12	0.06

ISO Metric 60° internal thread

Pitch (mm)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
0.50	0.29	0.09	0.07	0.07	0.06										
0.75	0.43	0.15	0.13	0.09	0.06										
1.00	0.58	0.17	0.15	0.11	0.09	0.06									
1.25	0.72	0.18	0.16	0.12	0.11	0.09	0.06								
1.50	0.87	0.21	0.20	0.16	0.13	0.11	0.06								
1.75	1.01	0.21	0.20	0.15	0.12	0.10	0.09	0.08	0.06						
2.00	1.15	0.24	0.22	0.18	0.14	0.12	0.10	0.09	0.06						
2.50	1.44	0.25	0.24	0.21	0.15	0.13	0.12	0.10	0.09	0.09	0.06				
3.00	1.73	0.26	0.25	0.22	0.17	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.06		
3.50	2.02	0.32	0.30	0.23	0.19	0.17	0.15	0.14	0.13	0.12	0.11	0.10	0.06		
4.00	2.31	0.33	0.31	0.24	0.22	0.18	0.15	0.14	0.13	0.12	0.12	0.11	0.10	0.10	0.06
4.50	2.60	0.36	0.33	0.28	0.24	0.21	0.19	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.06
5.00	2.89	0.41	0.38	0.32	0.27	0.24	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06
5.50	3.15	0.42	0.35	0.3	0.28	0.26	0.24	0.22	0.2	0.2	0.2	0.16	0.14	0.12	0.06
6.00	3.54	0.43	0.38	0.35	0.32	0.3	0.28	0.28	0.26	0.22	0.2	0.18	0.16	0.12	0.06

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Feed rate recommendation table

Whitworth external thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
28	0.58	0.17	0.14	0.11	0.10	0.06									
26	0.63	0.18	0.15	0.13	0.11	0.06									
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06								
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06								
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06								
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06						
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06						
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06						
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06					
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06				
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06			
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06		
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06		
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06

Whitworth internal thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
28	0.58	0.17	0.14	0.11	0.10	0.06									
26	0.63	0.18	0.15	0.13	0.11	0.06									
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06								
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06								
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06								
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06						
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06						
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06						
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06					
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06				
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06			
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06		
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06		
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06

Feed rate recommendation table

UN external thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
28	0.58	0.17	0.14	0.11	0.10	0.06									
26	0.63	0.18	0.15	0.13	0.11	0.06									
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06								
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06								
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06								
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06						
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06						
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06						
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06					
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06				
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06			
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06		
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06		
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06

UN internal thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
28	0.58	0.17	0.14	0.11	0.10	0.06									
26	0.63	0.18	0.15	0.13	0.11	0.06									
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06								
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06								
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06								
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06						
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06						
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06						
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06					
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06				
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06			
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06		
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06		
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06

A
General turning
Turning of small components
Parting and grooving
Threading
B
Indexable milling
Solid carbide end mill
C
Short hole drill
Solid carbide drill

A
General turning
Turning of small components
Parting and grooving
Threading
B
Indexable milling
Solid carbide end mill
C
Short hole drill
Solid carbide drill

A

Feed rate recommendation table

BSPT - external thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
28	0.58	0.17	0.14	0.11	0.10	0.06									
19	0.86	0.22	0.19	0.15	0.12	0.12	0.06								
14	1.16	0.24	0.20	0.17	0.14	0.12	0.12	0.11	0.06						
11	1.48	0.25	0.23	0.21	0.18	0.16	0.14	0.13	0.12	0.06					

BSPT - internal thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
19	0.86	0.22	0.19	0.15	0.12	0.12	0.06								
14	1.16	0.24	0.20	0.17	0.14	0.12	0.12	0.11	0.06						
11	1.48	0.25	0.23	0.21	0.18	0.16	0.14	0.13	0.12	0.06					

NPT - external thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
27	0.66	0.15	0.13	0.12	0.11	0.09	0.06									
18	1.01	0.20	0.16	0.14	0.13	0.12	0.11	0.09	0.06							
14	1.33	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06					
11.5	1.64	0.24	0.19	0.17	0.15	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.06			
8	2.42	0.33	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06

NPT - internal thread

Pitch (number of teeth/inch)	Total cutting depth	Steps of machining														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
27	0.66	0.15	0.13	0.12	0.11	0.09	0.06									
18	1.01	0.20	0.16	0.14	0.13	0.12	0.11	0.09	0.06							
14	1.33	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06					
11.5	1.64	0.24	0.19	0.17	0.15	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.06			
8	2.42	0.33	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06

A

Feed rate recommendation table

ISO 30°trapezoidal- external thread

Pitch (mm)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
1.5	0.91	0.23	0.21	0.17	0.13	0.11	0.06								
2	1.26	0.29	0.25	0.22	0.18	0.14	0.12	0.06							
3	1.77	0.32	0.31	0.25	0.20	0.18	0.17	0.15	0.13	0.06					
4	2.26	0.33	0.32	0.25	0.22	0.21	0.17	0.16	0.15	0.14	0.13	0.12	0.06		
5	2.75	0.35	0.32	0.26	0.24	0.22	0.21	0.19	0.19	0.17	0.15	0.14	0.13	0.12	0.06
6	3.52	0.37	0.35	0.34	0.33	0.32	0.31	0.27	0.26	0.25	0.24	0.16	0.14	0.12	0.06

ISO 30°trapezoidal- internal thread

Pitch (mm)	Total cutting depth	Steps of machining													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
1.5	0.90	0.23	0.20	0.17	0.13	0.11	0.06								
2	1.25	0.29	0.25	0.21	0.18	0.14	0.12	0.06							
3	1.75	0.32	0.30	0.24	0.20	0.18	0.17	0.15	0.13	0.06					
4	2.26	0.33	0.32	0.25	0.22	0.21	0.17	0.16	0.15	0.14	0.13	0.12	0.06		
5	2.75	0.35	0.32	0.26	0.24	0.22	0.21	0.19	0.19	0.17	0.15	0.14	0.13	0.12	0.06
6	3.52	0.37	0.35	0.34	0.33	0.32	0.31	0.27	0.26	0.25	0.24	0.16	0.14	0.12	0.06

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

Features of thread turning insert

- ◆ Precision molded and sophisticated grinded inserts are available.
- ◆ Strict size control ensures a smaller range of size fluctuations from insert to insert and a consistent quality.
- ◆ The unique edge with small arc corners can realize more specialized and rationalized machining.
- ◆ The inserts are equipped with chipbreakers to improve chip handling capability during machining and provide excellent machining stability.
- ◆ HR5225 and HR5125 dedicated for thread turning can ensure that the insert can effectively resist plastic deformation and wear during threading.

Machining type of thread tools

1. External threading with dextral thread	2. External threading with sinistral thread
3. Internal threading with dextral thread	4. Internal threading with sinistral thread

Threading (crosscutting) method

Graph	Machining method	Features	
		Advantage	Disadvantage
	Radial crosscutting (vertical feeding)	<ul style="list-style-type: none"> • Easiest to use (standard procedure for threading) • High versatility (easy to change conditions such as cutting depth) • Average wear on the rear insert face of the left and right cutting edges 	<ul style="list-style-type: none"> • It is difficult to dispose chips. • Vibrations tend to occur in the second half of machining (due to increased cutting edge contact length). • It is not suitable for large pitch machining. • There is a heavy load for the Corner radius (R) (because chips from both left and right sides will gather at the top)
	Tooth side feeding (One-way feeding)	<ul style="list-style-type: none"> • Relatively easy to use (standard procedure for threading) • The cutting forces can be reduced. • It is especially suitable for large pitch or materials prone to squeezing and cracking • Its chip handling performance is excellent. (Because it can control chip discharge direction). 	<ul style="list-style-type: none"> • The right rear insert face is badly worn (because the cutting depth on the right side is always zero). • It is difficult to change the cutting depth (NC program is required).
	Modified crosscutting of tooth side (One-way modified feeding)	<ul style="list-style-type: none"> • Its rear insert face wear can be effectively controlled. • The cutting forces can be reduced. • It is especially suitable for large pitch or materials prone to squeezing and cracking • Its chip handling performance is excellent (because it can control chip discharge direction). 	<ul style="list-style-type: none"> • It is difficult to program the machining (some machines can use standard methods directly) • It is difficult to change the cutting depth (NC program is required).
	Alternating crosscutting (Staggered feeding)	<ul style="list-style-type: none"> • Average wear on the rear insert face of the left and right cutting edges (Due to the staggered use of cutting edge) • The cutting forces can be reduced. • It is especially suitable for large pitch or materials prone to squeezing and cracking 	<ul style="list-style-type: none"> • It is difficult to program the machining (some machines can use standard methods directly) • It is difficult to change the cutting depth (NC program is required). • It is difficult to dispose chips (because they are discharged from both sides and may get tangled sometimes.)

A

General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

A



Cutting depth of threading

General turning

Turning of small components

Parting and grooving

Threading

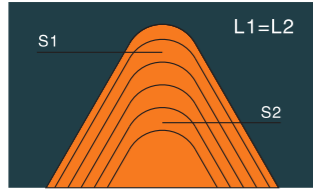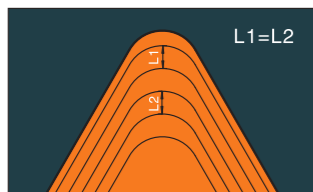Machining method	Features	
	Advantage	Disadvantage
 <p>Fixed cutting area</p>	<ul style="list-style-type: none"> • Easy to use (standard procedure for threading) • It has good vibration resistance (to keep cutting force stable). 	<ul style="list-style-type: none"> • The last chip is resistant to breaking (because the chip thickness becomes very thin). • The calculation of cutting depth when the number of machining steps is changed is slightly complicated.
 <p>Fixed cutting depth</p>	<ul style="list-style-type: none"> • It can reduce the load in the first half of the corner radius R. • It is easy to adjust the performance of chip handling (chip thickness can be set at will). • The calculation of cutting depth when the number of machining steps is changed is easy. • It maintains good chip handling performance through whole machining. 	<ul style="list-style-type: none"> • Vibrations tend to occur in the second half of machining (cutting force rises) • Sometimes it is necessary to change the NC (it is more common for fixed areas).

B

Wiper edge




Indexable milling


Solid carbide end mill

Short hole drill

Short hole drill

Solid carbide drill

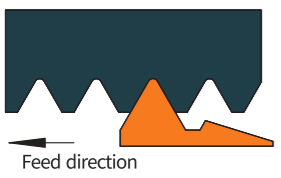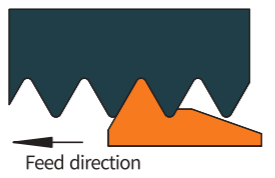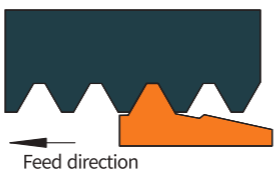Without wiper edge	With wiper edge	With semi-wiper edge (trapezoidal thread only)
<ul style="list-style-type: none"> • One insert can machine different pitches. • The corner radius R is less than that of a wiper edge insert, resulting in a short tool service life. • Additional finishing is required. 	<ul style="list-style-type: none"> • No burrs will appear on the thread teeth. • Different inserts are required for different pitches and shapes. 	<ul style="list-style-type: none"> • No burrs will appear on the thread teeth. • Different inserts are required for different pitches and shapes. • Additional finishing is required.
		

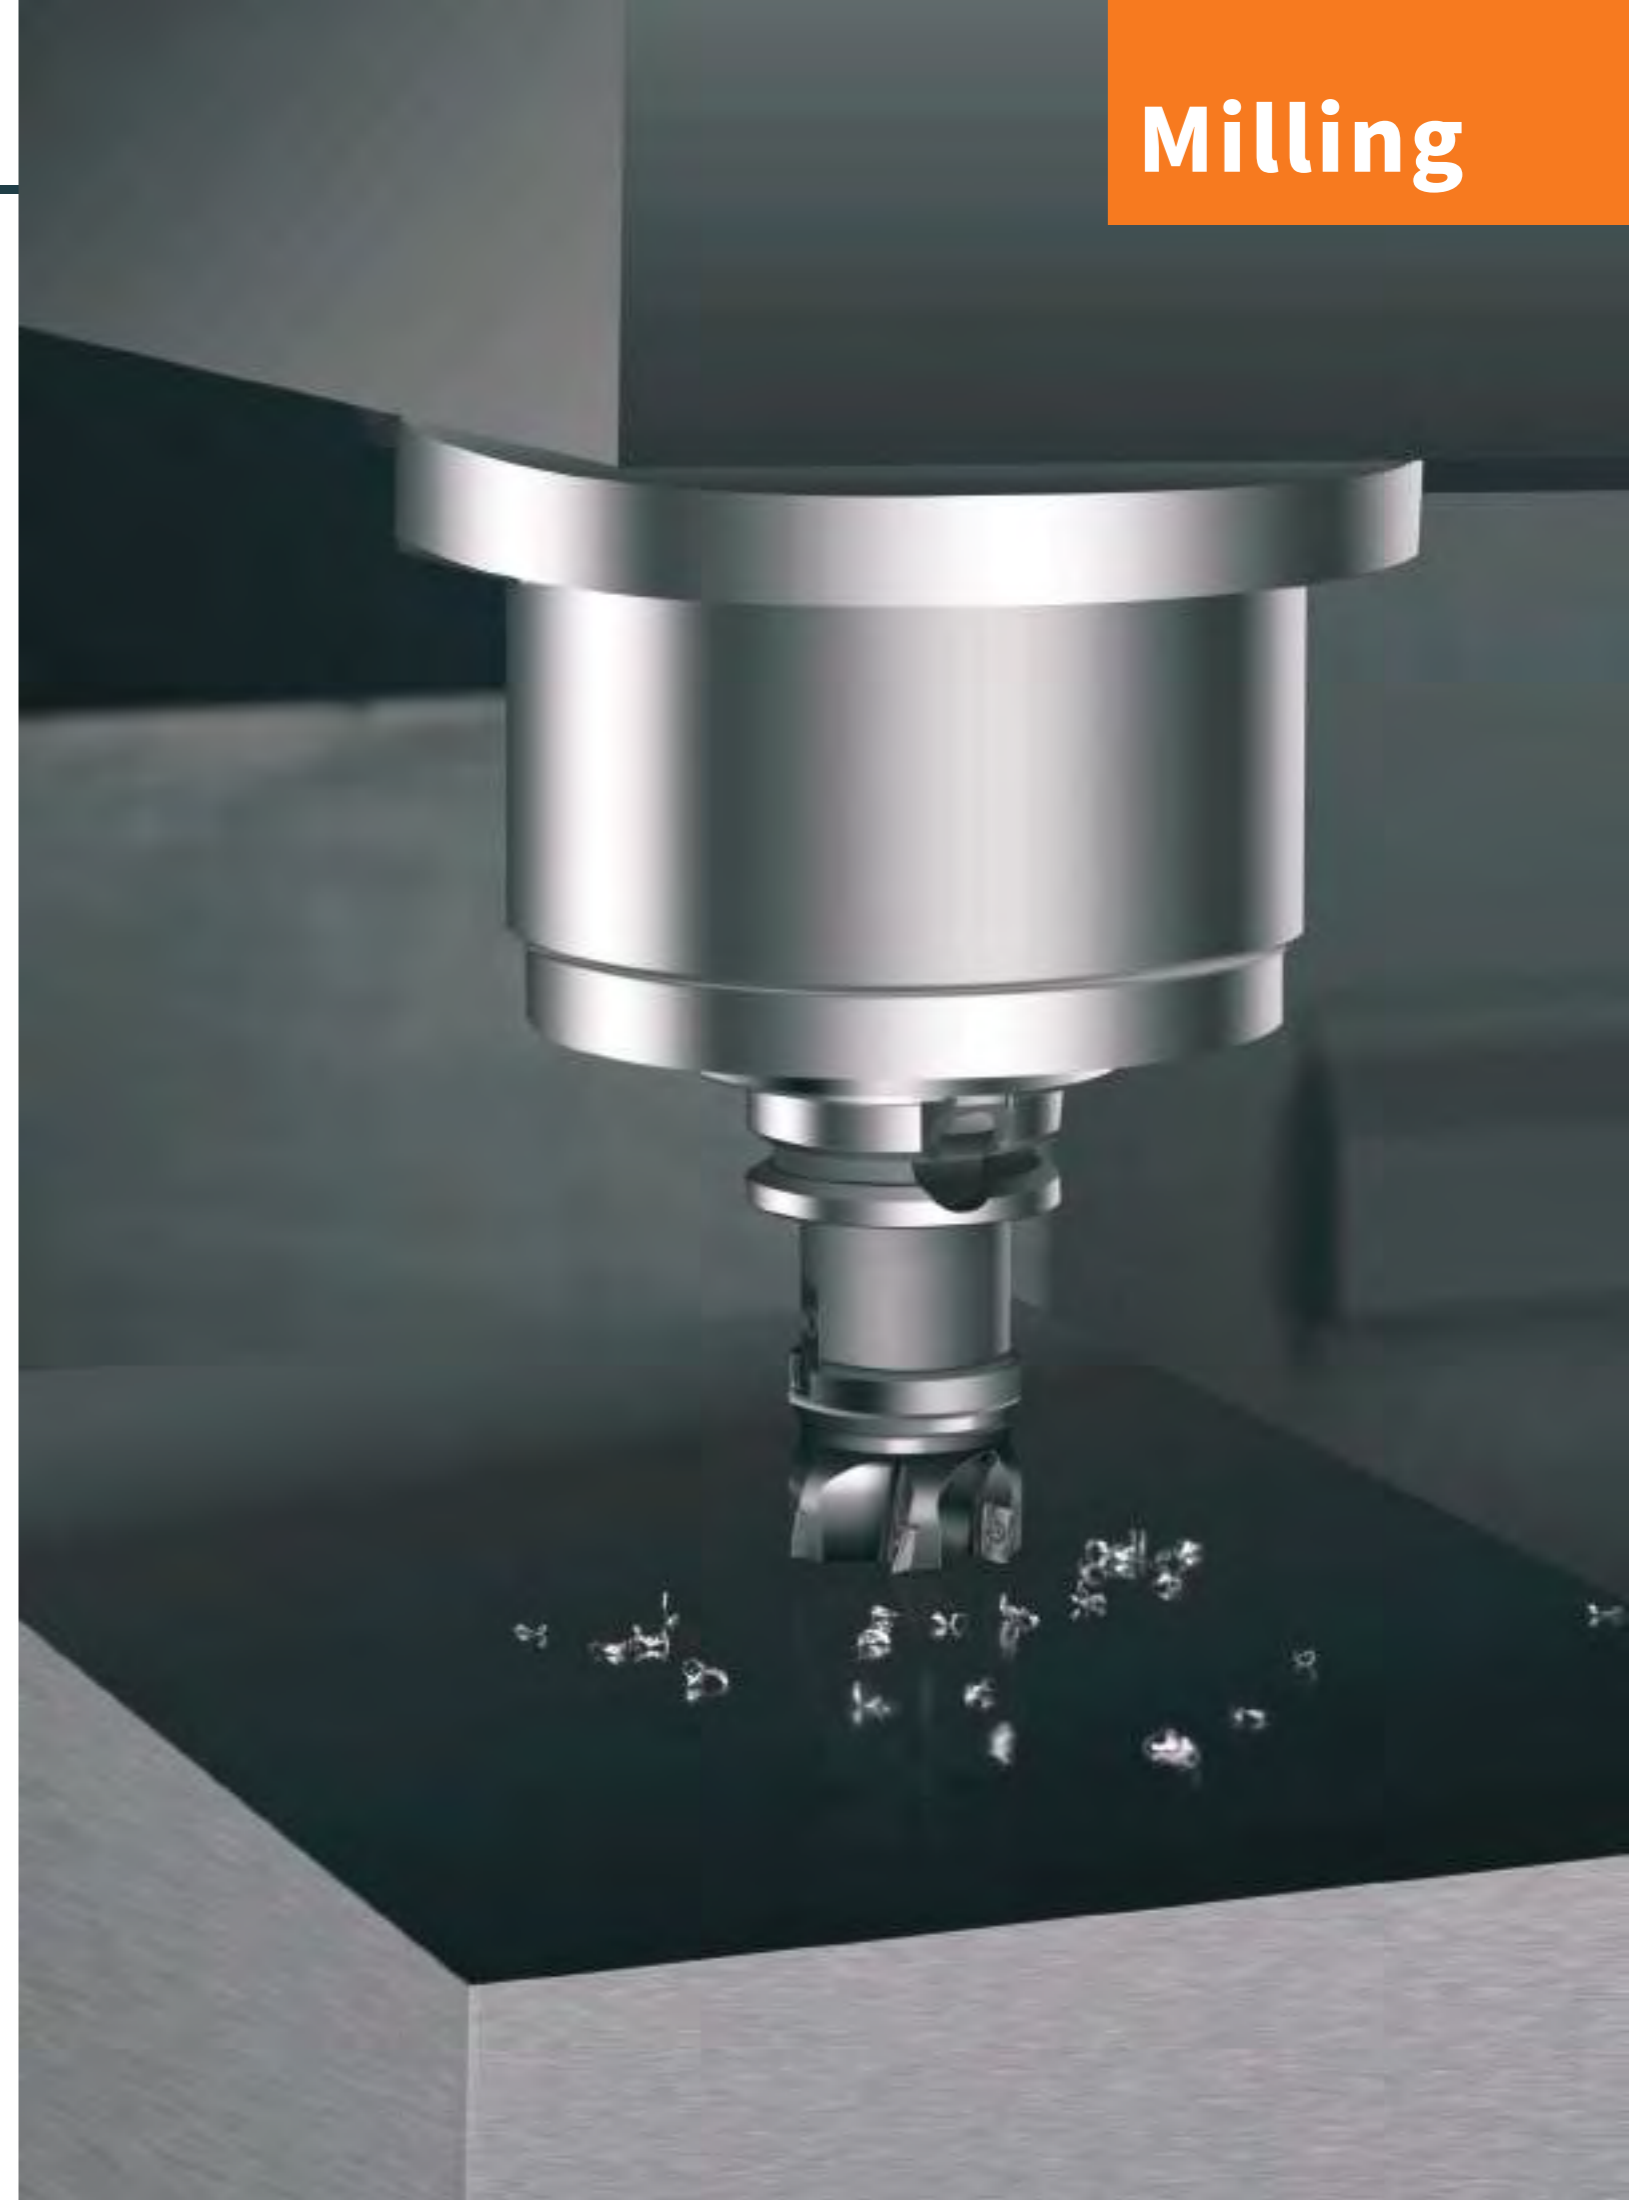

Overview of indexable milling inserts

Type	Material	ISO	CVD coating		PVD coating								Carbide	Cermet	ISO		
			HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140				HR7240	
P	Unalloyed steel/Alloy steel	P01														P01	
		P05															P05
		P10															P10
		P15			HR5110	HR5210											P15
		P20														HRC10	P20
		P25															P25
		P30															P30
		P35			HR8140												P35
		P40															P40
		P45															P45
P50															P50		
M	Stainless steel	M05														M05	
		M10														M10	
		M15			HR5110	HR5210											M15
		M20															M20
		M25															M25
		M30															M30
		M35															M35
		M40															M40
		M45															M45
		K	Cast iron	K01													
K05																K05	
K10																K10	
K15																K15	
K20					HR5110	HR5210											K20
K25																	K25
K30																	K30
K35					HR6130												K35
K40																	K40
K45																	K45
K50															K50		
N	Aluminum/aluminum alloy	N01														N01	
		N05															N05
		N10															N10
		N15															N15
		N20														HRC10	N20
		N25															N25
		N30															N30
S	Heat resistant super alloys Titanium alloy	S01														S01	
		S05															S05
		S10															S10
		S15															S15
		S20															S20
		S25															S25
		S30															S30
		S40															S40



Indexable milling

- ◆ Code key of indexable milling inserts B-01
- ◆ Code key of indexable milling tools B-03
- ◆ Indexable milling inserts overview B-05
- ◆ Overview of indexable milling tools B-07
- ◆ Overview of indexable milling inserts B-11
- ◆ Details of indexable milling tools B-13
 - Face milling tool series B-13
 - Square shoulder milling tool series B-27
 - Profile milling tool series B-46
 - High feed milling tool series B-57
 - Helical end milling cutter series B-62
 - Heavy milling inserts B-79

Solid carbide end mills

- ◆ Selection guidance of solid carbide end mills B-83
- ◆ Code key of solid carbide end mills B-85
- ◆ Overview of solid carbide end mills B-86
- ◆ Details and parameters recommendation B-88
 - Of solid carbide end mills
 - Series M - Micro end mills B-88
 - Series B - basic end mills B-100
 - Series P - high performance end mills B-146
 - Series X - special end mills B-188
- ◆ Non-standard customization of solid carbide end mills B-196

- A General turning
- Turning of small components
- Parting and grooving
- Threading
- B Indexable milling
- Solid carbide end mill
- C Short hole drill
- Solid carbide drill

Code key of indexable milling inserts

C **FM** **1** **45** **L** - **063** **A**

① ② ③ ④ ⑤ ⑥ ⑦

22 **I** **05** **L** - **S** **N** **10**

⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

① Tool type		③ Type		⑥ Outside diameter		⑦ Interface type	
C	Disc-type tools	1	Type 1	016	Ø 16mm	A	A-type interface
S	Rod-type tools	2	Type 2	020	Ø 20mm	B	B-type interface
		025	Ø 25mm	C	C-type interface
				032	Ø 32mm	D	D-type interface
				040	Ø 40mm	G	Straight shank
				050	Ø 50mm	X	Flat shank
				063	Ø 63mm	BT	BT taper shank
				080	Ø 80mm	JT	JT taper shank
				100	Ø 100mm	MT	Morse taper shank
				125	Ø 125mm	XPX	Compound shank
						HSK	Short taper shank

② Usage		④ Entering angle		⑤ Cutting direction	
FM	Face milling	45	45°	R	Default
TM	Groove milling	60	60°	L	Left
SM	Square shoulder milling	75	75°		
PM	Profile milling	90	90°		
CM	Chamfer milling	00	Exception		
EM	High feed				
HM	Helical end milling				

⑧ Sizes of tool installation parts	
16	Ø 16mm
22	Ø 22mm
27	Ø 27mm
32	Ø 32mm
40	Ø 40mm
60	Ø 60mm

⑨ Unit	
Inch	I
Metric	Default



⑩ Number of tooth	
02	Two teeth
03	Three teeth
04	Four teeth
...	...

⑪ Length type	
Cutterhead style	Omit
Shank style	Omit
S	Short
L	Long
XL	Lengthened

⑫ Insert shape	
A	
H	
L	
O	
R	
S	
T	
W	
Others	

⑬ Insert clearance angle	
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
O	Others

⑭ Cutting edge length	
09	9mm
10	10mm
12	12mm
15	15mm
19	19mm
Others	

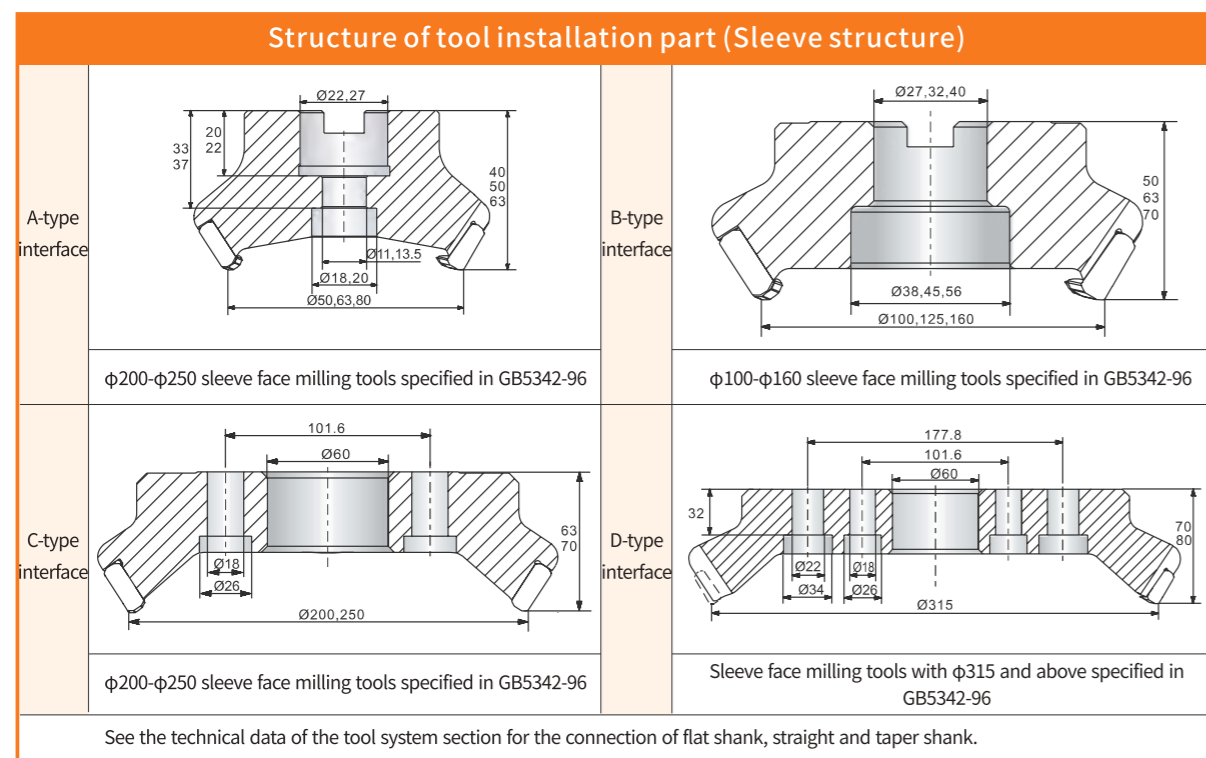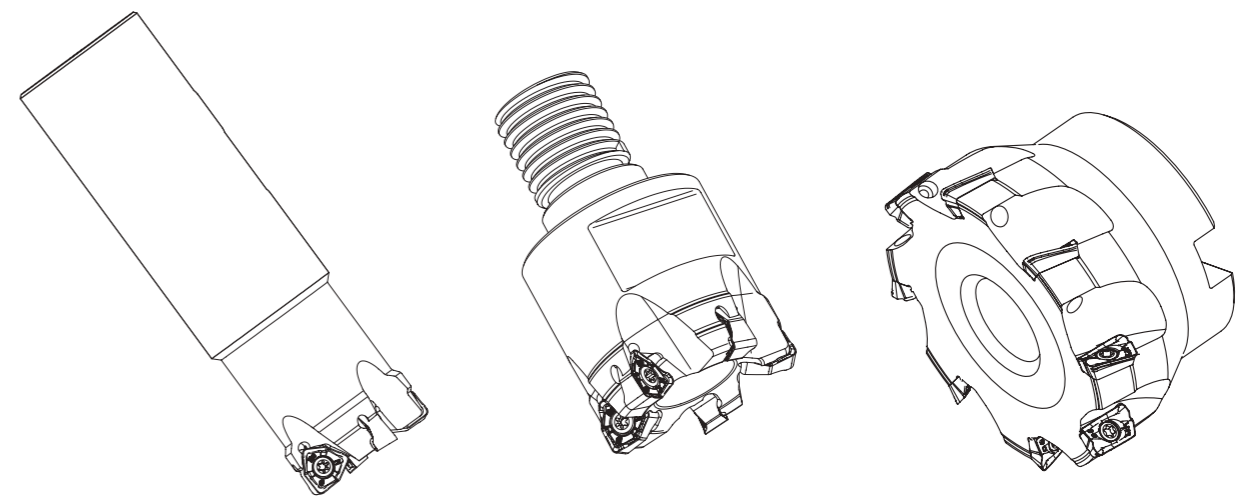

A General turning
 B Indexable milling
 C Short hole drill

A General turning
 B Indexable milling
 C Short hole drill

Code key of indexable milling inserts

A **P** **M** **T**

① ② ③ ④

16 **05** **PD** **E** **R** - **FM**

⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Shape code

		Others Z

③ Tolerance (mm)

Class	Corner height (m)	Inscribed circle (φD)	Thickness (S)	M-class tolerance requirements (distinguished by shape and inscribed circle size)						
				Inscribed circle	Regular triangle	Square	80° Rhombus	55° Rhombus	35° Rhombus	Circular
A	±0.005	±0.025	±0.025	6.35	±0.08	±0.08	±0.08	±0.11	±0.16	---
F	±0.005	±0.013	±0.025	9.525	±0.08	±0.08	±0.08	±0.11	±0.16	---
C	±0.013	±0.025	±0.025	12.7	±0.13	±0.13	±0.13	±0.15	---	---
H	±0.013	±0.013	±0.025	15.875	±0.15	±0.15	±0.15	±0.18	---	---
E	±0.025	±0.025	±0.025	19.05	±0.15	±0.15	±0.15	±0.18	---	---
G	±0.025	±0.025	±0.13	25.4	---	±0.18	---	---	---	---
J	±0.005	±0.05±0.13	±0.025	Inscribed circle (φD) tolerance						
K	±0.013	±0.05±0.13	±0.025	Inscribed circle	Regular triangle	Square	80° Rhombus	55° Rhombus	35° Rhombus	Circular
				6.35	±0.05	±0.05	±0.05	±0.05	±0.05	---
L	±0.025	±0.05±0.13	±0.025	9.525	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
				12.7	±0.08	±0.08	±0.08	±0.08	---	±0.08
M	±0.08±0.18	±0.05±0.13	±0.13	15.875	±0.10	±0.10	±0.10	±0.10	---	±0.10
				19.05	±0.10	±0.10	±0.10	±0.10	---	±0.10
N	±0.08±0.18	±0.05±0.13	±0.025	19.05	±0.10	±0.10	±0.10	±0.10	---	±0.10
				25.4	---	±0.13	---	---	---	±0.13
U	±0.13±0.38	±0.08±0.25	±0.13	25.4	---	±0.13	---	---	---	±0.13

② Cutting edge clearance angle major

Code	Clearance angle	Code	Clearance angle
A		B	
C		D	
E		F	
G		N	
P		O	Others

④ Chipbreaker and clamping form

Code	Hole	Chipbreaker	Sectional view	Code	Hole	Chipbreaker	Sectional view
B	Y	N/A		N	N/A	N/A	
H	Y	Single-sided		R	N/A	Single-sided	
C	Y	N/A		F	N/A	Double-sided	
J	Y	Double-sided		A	Y	N/A	
W	Y	N/A		M	Y	Single-sided	
T	Y	Single-sided		G	Y	Double-sided	
Q	Y	N/A		X	---	---	Exception
U	Y	Double-sided					

⑤ Cutting edge length

Inscribed circle diameter (mm)	Insert shape							
	C	D	R	S	T	V	W	K
32.00			32					
31.75			31					
25.40			25	25				
25.00	25	25	25					
20.00			20					
19.05	19		19	19	33			
16.00		19	16					
15.875	16		15	15	27			
12.70	12	15	12	15	22	22	08	
12.00			12					
10.00			10					
9.525	09	11	09	19	16	16	06	16
8.00			08					
6.35	06	07			11	11		
6.00			06					
5.56					09			
5.50			05					
3.97					06			

⑥ Insert thickness

Code	Thickness(mm)
12	12.70
10	11.11
T9	9.72
09	9.52
07	7.94
T6	6.75
06	6.35
T5	5.95
05	5.56
T4	4.96
04	4.76
T3	3.97
03	3.18
T2	2.58
02	2.38
T1	1.98
01	1.59
T0	0.99
00	0.79

⑦ Wiper edge

Code	Angle	Code	Angle
A	45°	A	3°
D	60°	B	5°
E	75°	C	7°
F	85°	D	15°
P	90°	E	20°
Z	Others	F	25°
		G	30°
		N	0°
		P	11°
		Z	Others

⑧ Cutting edge form

Code	Angle	Code	Angle
F	0-5°	0-0.10	K (or not marked)
E	1-10°	1-0.15	P
T	2-15°	2-0.20	
S	3-20°	3-0.25	W
	4-25°	4-0.30	
	5-30°	5-0.35	Q
	1-10°	6-0.40	
	1-10°	7-0.45	

⑨ Cutting direction

Code	Direction
R	Right
L	Left
N	Two-way

⑩ Chipbreaker code

A General turning
B Indexable milling
C Solid carbide end mill

A General turning
B Indexable milling
C Solid carbide end mill

Indexable milling insert overview

Grade type	Grade	ISO	Color	Coating type	Coating Composition	Characteristics
Coated Carbide	HR6130	ISO P ISO K	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	Suitable for rough and semi-finishing milling of ISO P and ISO K. The use of high strength composite coating, taking into account the requirements of wear resistance and strength for milling machining. At the mean time, the new post-treatment process effectively improves the toughness of the insert.
	HR8140	ISO P	Black & Yellow	CVD	TiN+MT-TiCN+Al ₂ O ₃	Most apply for heavy milling of ISO P material The use of CVD thin coating design, taking into account the requirements of wear resistance and strength for milling machining. At the mean time, with excellent resistance to high temperature plastic deformation of the matrix, both high hardness and stable performance characteristics.
	HR5110	ISO P ISO H	Bronze	PVD	TiAlN+CrAlN +TiSiN	Suitable for milling of ISO H material (45-55HRC) Fine-grain cemented carbide matrix with a new nano gradient composite structure coating, the product surface is smooth, with small friction coefficient, the nano hardness is high, and the oxidation resistance is excellent.
	HR5210	ISO P ISO H	Rainbow color	PVD	AlTiN+TiSiN	Suitable for milling of ISO H materials (50-65HRC) The uniformly distributed ultrafine nanoparticles matrix combined with a wear-resistant coating, shows accountable thermal stability and oxidation resistance, greatly improve the red hardness of the coating, with the ability to withstand high cutting temperatures, and adapt to machining of high hardness materials.
	HR5120	ISO P ISO M ISO K	Bronze	PVD	TiAlN+CrAlN +TiSiN	Suitable for milling of ISO P, M, K materials, especially for machining of materials with hardness of 35-50 HRC: With excellent wear resistance and toughness and the latest multi-component nano coating, shows excellent high temperature hardness.
	HR5220	ISO P ISO M ISO K	Bronze	PVD	AlTiN+TiSiN	Suitable for milling of ISO P, M, K materials, especially for machining of materials with hardness of 40-45 HRC: Apply for AlTiN and TiSiN double-layer coating structure has good strength, toughness and wear resistance, reduces the extension of longitudinal cracks, and effectively improves the chipping resistance of the coating.

Grade type	Grade	ISO	Color	Coating type	Coating Composition	Characteristics
Coated Carbide	HR5130	ISO P ISO M ISO K	Gray	PVD	AlTiN	Suitable for milling of ISO P, M, materials, especially for machining of materials with hardness below 30 HRC: The special proportion of the matrix effectively improves the wear resistance and toughness and reduces the risk of breakage. Combined with the latest nano coatings, the overall performance is excellent in high feed milling.
	HR530	ISO P ISO M	Gray	PVD	AlTiN/AlCrN	Aiming for milling of mild steel and stainless steel. The new nano-multilayer composite coating technology greatly improves wear resistance. The toughness matrix with a new coating process, allowing higher cutting speed and feed, excellent film-matrix adhesion strength, effectively reduce the risk of insert breakage.
	HR7130	ISO P	Purple Gray	PVD	TiAlN	Generally used for heavy milling of ISO P material Adopting thick PVD coating design, with good wear resistance and impact resistance; high temperature resistance, high hardness and high stability.
	HR7140	ISO M ISO S	Gray	PVD	AlCrN	Suitable for milling of stainless steel, titanium alloy and high temperature alloy. Special microelement matrix, with good toughness and high temperature performance.
	HR7240	ISO M ISO S	Bronze	PVD	AlCrN	Suitable for milling of stainless steel, titanium alloy and high-temp alloy. The new composition and matrix structure design, high temperature resistance and toughness are taken into account, and its wear resistance is further improved.
Cermet	HRC10	ISO P	Bronze	PVD	TiAlSiN	Suitable for finishing and semi-finishing milling of ISO P material. With high thermal stability and wear resistance, excellent thermal shock resistance, the new high tungsten, high nitrogen fine particle matrix supplemented by high tantalum and niobium content, great high temperature resistance and collapse resistance performance.

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B5

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B6

Overview of indexable milling tools

Machining form	Series/shape	Cutting edge angle	Applicable inserts	Insert shape	Usage and features	Page
Face milling tool	CFM143 	KAPR=43°	OD□□0605		<ul style="list-style-type: none"> Light and fast in cutting, it is cost-effective with unilateral octagonal inserts; It is suitable for face milling P, M, K and other materials. 	B13–B14
	CFM145 	KAPR=45°	SNGX1005ANR–GM SNGX1005ANR–GE		<ul style="list-style-type: none"> Supported by grinding level/precision molded level quadrilateral negative angle inserts, cutting can be finished in a light and fast manner; Tools with either sparse or dense tooth structure are suitable for different working conditions and machining efficiency requirements. It is suitable for face milling P, M, K and other materials and the first choice of general machining. 	B15–B16
	CFM245 	KAPR=45°	SEET13T3–GM SEMT13T3AGTN–FM		<ul style="list-style-type: none"> Supported by grinding level/precision molded level quadrilateral 20° clearance angle inserts, the cutting force is decreased; They are convenient to clamp with screwing down construction, thus suitable for light cutting. 	B17–B18
	CFM345 	KAPR=45°	SZMX1206ANR–GM		<ul style="list-style-type: none"> It is equipped with self-developed new structured groove inserts, ensuring both high machining efficiency and long service life. It is suitable for machining P, M, K and other materials and the first choice for roughing. 	B19–B20
	CFM445 	KAPR=45°	SEEN1203AFTN SEKR1203AFTN SEMR1203AFTN	 	<ul style="list-style-type: none"> With 20° clearance angle cutting inserts, the milling tool is for multiple purposes and can finish cutting in a light and fast manner. It is suitable for face milling of P, M, K and other materials. 	B21–B22
	CFM645 	KAPR=45°	HNMX0906ANSN–M		<ul style="list-style-type: none"> Cost-effective face milling tool series It has double-sided high strength hexagonal insert with 12 cutting edges. 	B23–B24
	CFM745 	KAPR=45°	XN□□0705 XN□□0906		<ul style="list-style-type: none"> Cost-effective face milling tools series It has double-sided heptagon insert with 14 cutting edges. 	B25–B26

Overview of indexable milling tools

Machining form	Series/shape	Cutting edge angle	Applicable inserts	Insert shape	Usage and features	Page
Square shoulder milling tool	CSM188 	KAPR=88°	SNGX1005ZNN–GM		<ul style="list-style-type: none"> Supported by grinding level/precision molded level quadrilateral negative angle inserts, the cutting process proceeds stably. It is suitable for general face milling of P, M, K and other materials, being both cost-effective and multi-functional. 	B27–B29
	SSM188 		SNMX100512–GM			
	CSM190 	KAPR=90°	AOKT06□□		<ul style="list-style-type: none"> High-precision shoulder milling tool series It is a 90° shoulder milling tool with a helical edge design providing low cutting forces. The tool is available in diameters φ11-φ80. It is suitable for side milling, groove milling, Ramp Milling and other multifunctional machining of P-, M-, K- and S-type materials, and it is a preferred tool for shoulder milling. 	B30–B34
	SSM190 		AOKT11□□			
	KH 		AOKT16□□			
	CSM290 	KAPR=90°	APKT11□□		<ul style="list-style-type: none"> Square shoulder milling tool series with high performance. It is suitable for milling mild steel, stainless steel, titanium alloy, high-temp alloy, etc. The tool is available in diameters φ16-φ80, with a 90° cutting edge angle structure. It is suitable for shoulder milling, groove milling, Ramp Milling, face milling and other machining. 	B35–B37
	SSM290 		APKT16□□			
	CSM390 	KAPR=90°	ZNMU0403□□		<ul style="list-style-type: none"> Cost-effective shoulder milling cutter series. It has 6 edges on both sides. The tool's locating is stable. As a result, the cutting process is reliable. There are rod-shaped, sleeve-type cutterhead and replaceable tools for option. 	B38–B42
	SSM390 		ZNMU0806□□			
	KH 					

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B7

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B8

Overview of indexable milling tools

Machining form	Series/shape	Cutting edge angle	Applicable inserts	Insert shape	Usage and features	Page
Square shoulder milling tool	CSM590 	KAPR=90°	APMT11□□ APGT11□□ APMT16□□ APGT16□□		<ul style="list-style-type: none"> ○ Universal shoulder milling tool series ○ It is suitable for shoulder milling, groove milling, Ramp Milling and face milling of P, K and N materials. 	B43–B45
	SSM590 					
Profile milling tool	CPM100 	/	RC□□		<ul style="list-style-type: none"> ○ It is suitable for machining P, M, K and other materials. ○ It is of different diameters and can be used for machining planes, curved surfaces and cavities. 	B46–B47
	SPM100 					
Profile milling tool	CPM200 	/	RP□□		<ul style="list-style-type: none"> ○ It is suitable for machining P, M, K and other materials. ○ It is of different diameters and can be used for machining planes, curved surfaces and cavities. 	B48–B50
	SPM200 					

Overview of indexable milling tools

Machining form	Series/shape	Cutting edge angle	Applicable inserts	Insert shape	Usage and features	Page
Profile milling tool	CPM300 	/	RD□□		<ul style="list-style-type: none"> ○ It is suitable for the machining of P, K materials and hardened materials. It is of different diameters and can be used for machining flat, curved surfaces and cavities. 	B51–B54
	SPM300 					
High-feed milling tool	CEM100 	/	SD□□		<ul style="list-style-type: none"> ○ It is suitable for cavity milling and face milling of P, K and other materials, which can realize high Feed rate, and can also be used for insert milling. ○ The tool is available in diameters Φ20-Φ160mm. 	B57–B59
	SEM100 					
Helical end mill	CHM190 	KAPR=90°	SP12□□ AP15□□		<ul style="list-style-type: none"> ○ Large cutting depth milling tools are made of steel, alloy steel and cast iron. ○ The tool is available in diameters φ 63 mm and φ 80 mm with BT and JT interface. 	B62–B63

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B9

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B10

Overview of indexable milling inserts

Insert shape	Insert model	Page
	APMT1135PDER-HM APMT1605PDER-HM	B45
	APGT1135PDFR-AK APGT1604PDFR-AK	B45
	APKT113604PEER-FM APKT1136PEER-FM APKT113612PEER-FM APKT113620PEER-FM APKT1605PDER-FM APKT160512PDER-FM APKT160520PDER-FM	B37
	SPMT120408-MM APMT150412-MM SPHX120408T21 APHX1504	B63
	AOKT060202PEER-VM AOKT060204PEER-VM AOKT060208PEER-VM AOKT113504PEER-VM AOKT113508PEER-VM AOKT113512PEER-VM AOKT113516PEER-VM AOKT160408PEER-VM AOKT160412PEER-VM AOKT160416PEER-VM	B33

Insert shape	Insert model	Page
	HNMX0906ANSN-M	B24
	LNKU0303ZNR-MH LNKU0303ZNR-LH	B71
	ODKT0605ADN ODMT060508-R	B14
	RCKT10T3MO-FM RCKT1204MO-FM RCKT1606MO-FM RCKT2006MO-FM	B47
	RDMW0602MO RDMW0802MO RDMW10T3MO RDMW1204MO RDMW1605MO	B53
	RDKW10T3MO RDKW1204MO RDKW1604MO	B53
	RPMT08T2MO-HM RPMW1003MO RPMT1204MO-HM	B50

Insert shape	Insert model	Page
	RPKT10T3MO-MS RPKT1204MO-MS RPKT1606MO-MS	B50
	RPMT08T2MO-SM RPMT10T3MO-SM RPMT1204MO-SM RPMT1606MO-SM	B50
	SDMT1205ZTN-FM SDMT1505ZTN-FM	B59
	SDMW1205ZTN SDMW1505ZTN	B59
	SEET13T3-GM SEMT13T3AGTN-FM	B18
	SEKR1203AFTN SEMR1203AFTN	B22
	SEEN1203AFTN	B22
	SPKN1504EDTL SPKN1504EDTR	

Insert shape	Insert model	Page
	SNGX1005ANR-GM SNGX1005ANR-GE	B16
	SNGX1005ZNN-GM SNMX100512-GM	B29
	SZMX1206ANR-GM	B20
	XNMX070508-M XNMX0705ANN-M XNGX0705ANN-R XNMX090612-M XNGX0906-W	B26
	ZNMU040308PNR-GM ZNMU080608PNR-GM ZNMU080608PNR-GL ZNMU080608PNR-GR ZNMU080616PNR-GR	B42

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

Face milling

CFM143 series

KAPR=43°

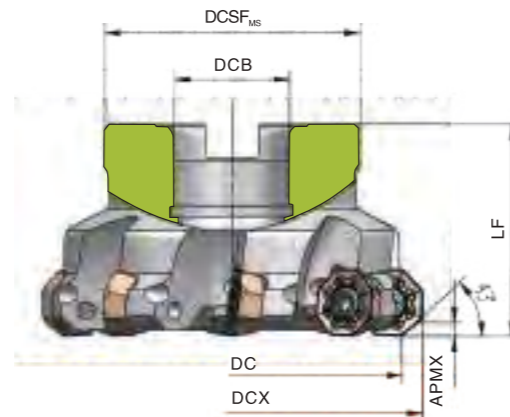


Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{MS}	DCX	LF					
CFM143-040A1603-OD06	3	△	40	16	35	50	40	4	A	OD□□	M50130	HTT20IP
CFM143-050A2204-OD06	4	△	50	22	47	60	40	4				
CFM143-063A2205-OD06	5	△	63	22	47	72	40	4				
CFM143-080A2706-OD06	6	▲	80	27	62	90	50	4				
CFM143-100A3207-OD06	7	▲	100	32	77	110	50	4				
CFM143-125B4008-OD06	8	△	125	40	90	135	63	4				
CFM143-160C4010-OD06	10	△	160	40	92	170	63	4				
CFM143-200C6012-OD06	12	△	200	60	175	210	63	4	C	HAT20IP		

▲Standing inventory △Make-to-order

Applicable inserts

OD□□

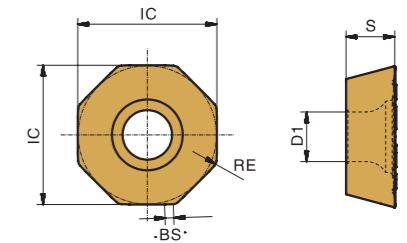

Working condition: ● Stable ● Average ✚ Tough

Applicable inserts	Workpiece material	Working condition													
		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Applicable inserts	P Steel	●	✚	●	●	●	●	●	●	●	●	●	●	●	●
	M Stainless steel			●	●	●	●	●	●	●	●	●	●	●	●
	K Cast iron	●	✚	●	●	●	●	●	●	●	●	●	●	●	●
	N Non-ferrous metal														●
	S Heat resistant super alloys Titanium alloy													✚	●

Type	Dimension (mm)					APMX (mm)	Working condition																	
	IC	S	D1	BS	RE		CVD	PVD																
ODKT0605ADN	15.875	5.56	5.5	1.2	0.8	4	★	☆	☆	★	★	★												
ODMT060508-R	15.875	5.56	5.5	1.2	0.8	4	★	☆	☆	★	★	★												

★ Recommended grade ☆ Available grade


Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Steel	Low-carbon steel, mild steel	HR5120	270(220-350)	0.3(0.1-0.5)
		HR5220	240(200-320)	
		HR5130	220(200-320)	
	High-carbon steel, alloy steel	HR5110	240(200-320)	0.2(0.1-0.4)
		HR5120	200(160-280)	
		HR5220	200(160-280)	
		HR5130	200(160-260)	
	Alloy tool steel	HR5110	220(170-340)	0.15(0.1-0.3)
		HR5210	200(150-280)	
HR5120		180(150-250)		
HR5220		180(150-250)		
M Stainless steel	HR5120	180(120-240)	0.2(0.1-0.3)	
	HR5130	150(120-180)		
K Cast iron	HR6130	280(180-320)	0.2(0.1-0.4)	
	HR5110	200(150-250)		
	HR5120	200(150-250)		

Face milling

CFM145 series

KAPR=45°

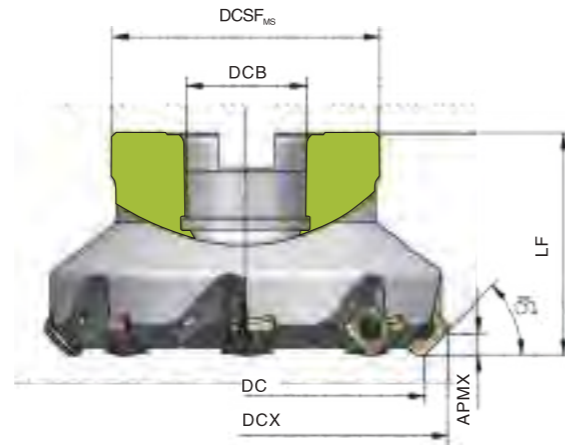


Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{MS}	DCX	LF					
CFM145-050A2204-SN10	4	▲	50	22	47	60.5	40	4.7	A	SNGX□□	M35100	HTT10IP
CFM145-050A2205-SN10	5	△	50	22	47	60.5	40	4.7				
CFM145-063A2205-SN10	5	△	63	22	47	73.5	40	4.7				
CFM145-063A2206-SN10	6	▲	63	22	47	73.5	40	4.7				
CFM145-080A2706-SN10	6	△	80	27	62	90.5	50	4.7				
CFM145-080A2708-SN10	8	▲	80	27	62	90.5	50	4.7				
CFM145-100A3206-SN10	6	△	100	32	77	110.5	50	4.7				
CFM145-100A3208-SN10	8	▲	100	32	77	110.5	50	4.7				
CFM145-100A3210-SN10	10	△	100	32	77	110.5	50	4.7				
CFM145-125B4008-SN10	8	△	125	40	90	135.5	63	4.7				
CFM145-125B4010-SN10	10	△	125	40	90	135.5	63	4.7				
CFM145-125B4012-SN10	12	△	125	40	90	135.5	63	4.7				
CFM145-160C4008-SN10	8	△	160	40	92	170.5	63	4.7	C	SNGX□□	M35100	HAT10IP
CFM145-160C4012-SN10	12	▲	160	40	92	170.5	63	4.7				
CFM145-160C4014-SN10	14	△	160	40	92	170.5	63	4.7				

▲Standing inventory △Make-to-order

Applicable inserts

SN□□

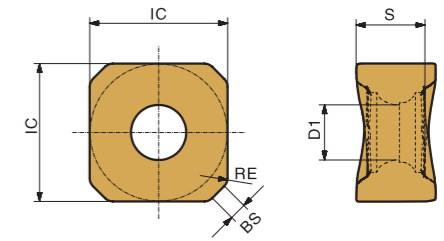

Working condition: ● Stable ● Average ✦ Tough

Applicable inserts	Workpiece material	Dimension (mm)															CVD	PVD				Cemented carbide	Cermet						
		IC					S					D1						BS						RE					
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10															
P	Steel	●	✦	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
M	Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
K	Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
N	Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
S	Heat resistant super alloys Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			


Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P	Low-carbon steel, mild steel	HR5120	270(220-350)	0.3(0.1-0.5)
		HR5220	240(200-320)	
		HR5130	220(200-320)	
	High-carbon steel, alloy steel	HR5110	240(200-320)	0.2(0.1-0.4)
		HR5120	200(160-280)	
		HR5220	200(160-280)	
		HR5130	200(160-260)	
	Alloy tool steel	HR5110	220(170-340)	0.15(0.1-0.3)
		HR5210	200(150-280)	
HR5120		180(150-250)		
M	Stainless steel	HR5220	180(150-250)	0.2(0.1-0.3)
		HR5130	150(120-180)	
		HR5120	180(120-240)	
K	Cast iron	HR6130	280(180-320)	0.2(0.1-0.4)
		HR5110	200(150-250)	
		HR5120	200(150-250)	

Face milling

CFM245series

KAPR=45°

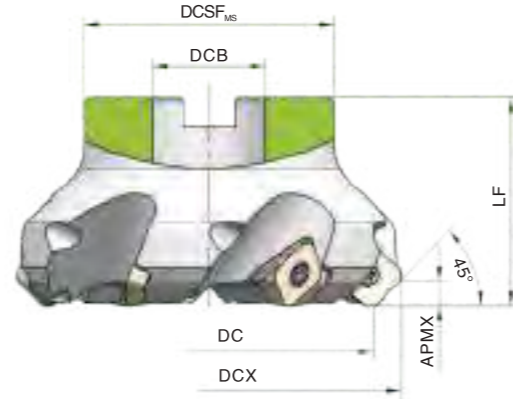


Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{ms}	DCX	LF					
CFM245-050A2203-SE13	3	△	50	22	47	61	40	6	A	M35100	HTT10IP	
CFM245-050A2204-SE13	4	△	50	22	47	61	40	6				
CFM245-063A2204-SE13	4	△	63	22	47	74	40	6				
CFM245-063A2205-SE13	5	▲	63	22	47	74	40	6				
CFM245-080A2704-SE13	4	△	80	27	62	91	50	6				
CFM245-080A2706-SE13	6	▲	80	27	62	91	50	6				
CFM245-100A3205-SE13	5	△	100	32	77	107	50	6				
CFM245-100A3207-SE13	7	△	100	32	77	111	50	6				
CFM245-125B4006-SE13	6	△	125	40	90	136	63	6				B
CFM245-125B4008-SE13	8	△	125	40	90	136	63	6				
CFM245-160C4010-SE13	10	△	160	40	92	171	63	6				
CFM245-160C4012-SE13	12	△	160	40	92	171	63	6	C	M35100	HTT10IP	
CFM245-200C6014-SE13	14	△	200	60	175	211	63	6				
CFM245-200C6018-SE13	18	△	200	60	175	211	63	6				

▲Standing inventory △Make-to-order

Applicable inserts

SE□□

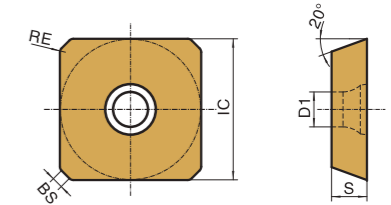

Working condition: ● Stable ● Average ✘ Tough

Type	Dimension (mm)					APMX (mm)	Working condition													
	IC	S	D1	BS	RE		CVD					PVD					Cemented carbide	Cermet		
							HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
SEET13T3-GM	13.4	3.97	4.1	1.4	1.5	6	★	☆	☆	★	★	★								
SEMT13T3AGTN-FM	13.4	3.97	4.1	1.4	1.5	6	★	☆	☆	★	★	★								

★ Recommended grade ☆ Available grade


Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Steel	≤180	HR5120	270(220-350)	0.3(0.1-0.5)
		HR5220	240(200-320)	
		HR5130	220(200-320)	
	180-280	HR5110	240(200-320)	0.2(0.1-0.4)
		HR5120	200(160-280)	
		HR5220	200(160-280)	
	280-350	HR5130	200(160-260)	0.15(0.1-0.3)
		HR5110	220(170-340)	
		HR5210	200(150-280)	
M Stainless steel	≤270	HR5120	180(120-240)	0.2(0.1-0.3)
		HR5130	150(120-180)	
K Cast iron	180-250	HR6130	280(180-320)	0.2(0.1-0.4)
		HR5110	200(150-250)	
		HR5120	200(150-250)	

Face milling

CFM345series


KAPR=45°

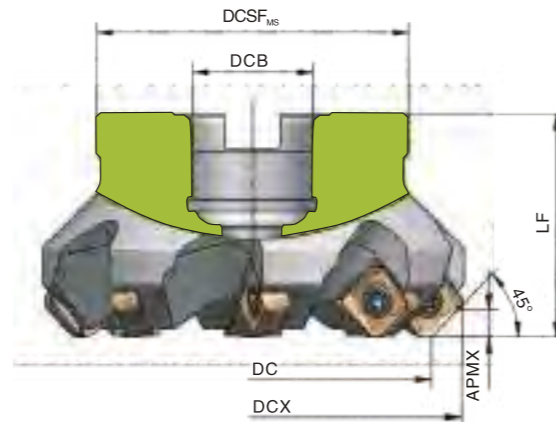

Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{MS}	DCX	LF					
CFM345-050A2204-SZ12	4	▲	50	22	47	63.7	40	6	A	M40100 M40110	HTT15IP	
CFM345-050A2205-SZ12	5	△	50	22	47	63.7	40	6				
CFM345-063A2205-SZ12	5	▲	63	22	47	76.7	40	6				
CFM345-063A2206-SZ12	6	△	63	22	47	76.7	40	6				
CFM345-080A2706-SZ12	6	▲	80	27	62	93.7	50	6				
CFM345-080A2708-SZ12	8	△	80	27	62	93.7	50	6				
CFM345-100A3206-SZ12	6	△	100	32	77	113.7	50	6				
CFM345-100A3208-SZ12	8	△	100	32	77	113.7	50	6				
CFM345-100A3210-SZ12	10	▲	100	32	77	113.7	50	6				
CFM345-125B4008-SZ12	8	△	125	40	90	138.7	63	6				
CFM345-125B4010-SZ12	10	▲	125	40	90	138.7	63	6				
CFM345-125B4012-SZ12	12	△	125	40	90	138.7	63	6				
CFM345-160C4008-SZ12	8	△	160	40	92	173.7	63	6				
CFM345-160C4012-SZ12	12	▲	160	40	92	173.7	63	6				
CFM345-160C4014-SZ12	14	△	160	40	92	173.7	63	6				

▲Standing inventory △Make-to-order

Applicable inserts SZMX □□

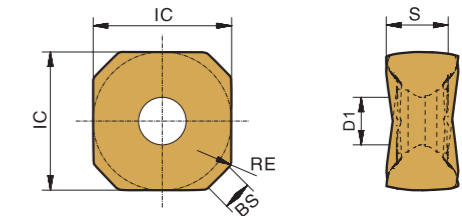

Working condition: ● Stable ● Average ✦ Tough

Applicable inserts	Workpiece material	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal	S Heat resistant super alloys Titanium alloy	Dimension (mm)													
							IC						PVD						CVD	Cermet
							HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10		
SZMX1206ANR-GM		●	●	●	●	●	✦	☆	☆	★	★	★	★							

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data						
			Cutting speed vc (m/min)	Feed rate fz(mm/z)					
P Low-carbon steel, mild steel	≤ 180	HR5120	270(220-350)	0.3(0.1-0.5)					
		HR5220	240(200-320)						
		HR5130	220(200-320)						
		High-carbon steel, alloy steel	180-280	HR5110	240(200-320)	0.2(0.1-0.4)			
				HR5120	200(160-280)				
				HR5220	200(160-280)				
				HR5130	200(160-260)				
				Alloy tool steel	280-350		HR5110	220(170-340)	0.15(0.1-0.3)
							HR5210	200(150-280)	
HR5120	180(150-250)								
HR5220	180(150-250)								
M Stainless steel	≤ 270	HR5120	180(120-240)	0.2(0.1-0.3)					
		HR5130	150(120-180)						
K Cast iron	180-250	HR6130	280(180-320)	0.2(0.1-0.4)					
		HR5110	200(150-250)						
		HR5120	200(150-250)						


A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Face milling

CFM445series

KAPR=45°

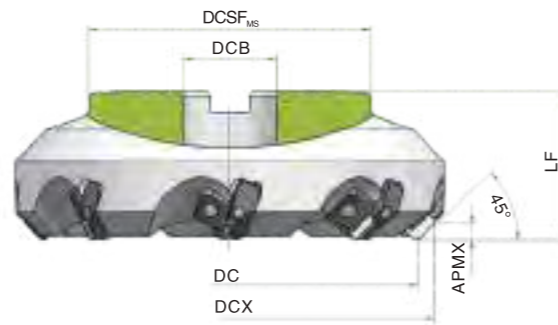


Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts
			DC	DCB	DCSF _{MS}	DCX	LF			
CFM445-080A2704-SE12	4	▲	80	27	62	103	50	5.5	A	SE□R1203□
CFM445-100A3205-SE12	5	▲	100	32	77	122	50	5.5	B	
CFM445-125B4006-SE12	6	△	125	40	90	147	63	5.5	C	
CFM445-160C4008-SE12	8	△	160	40	92	181	63	5.5	D	
CFM445-200C6010-SE12	10	△	200	60	175	221	63	5.5		
CFM445-250C6012-SE12	12	△	250	60	210	270	63	5.5		
CFM445-315D6015-SE12	15	△	315	60	250	353	63	5.5		

▲Standing inventory △Make-to-order

Insert	Toolholder	Brale	Screw	Clamping screw	Wrench
SE□□12	HSERR/L	H05R/L	HM8×21	HOM5×15.4	HT20T HH40T

Applicable inserts

SE□□

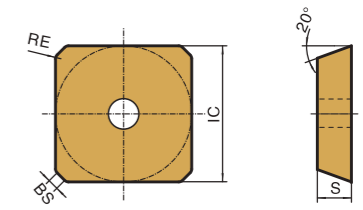

Working condition: ● Stable ● Average ✦ Tough

Applicable inserts	Workpiece material	Working condition																	
		Stable ● Average ● Tough ✦																	
		Steel	Stainless steel	Cast iron	Non-ferrous metal	Heat resistant super alloys Titanium alloy													
Type	Dimension (mm)					APMX (mm)	CVD										Cermet		
	IC	S	D1	BS	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140		HR7240	HRK10
SEEN1203AFTN	12.7	3.18	2.5	1.2	0.8	5.5	●	✦	●	●	●	●	●	●	●	●	●	●	●
SEKR1203AFTN	12.7	3.18	2.5	1.3	1.6	5.5	●	●	●	●	●	●	●	●	●	●	●	●	●
SEMR1203AFTN	12.7	3.18	2.5	1.3	1.6	5.5	●	●	●	●	●	●	●	●	●	●	●	●	●

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Steel	≤ 180	HR5120	270(220-350)	0.3(0.1-0.5)
		HR5220	240(200-320)	
		HR5130	220(200-320)	
	180-280	HR5110	240(200-320)	0.2(0.1-0.4)
		HR5120	200(160-280)	
		HR5220	200(160-280)	
		HR5130	200(160-260)	
	280-350	HR5110	220(170-340)	0.15(0.1-0.3)
		HR5210	200(150-280)	
HR5120		180(150-250)		
M Stainless steel	≤ 270	HR5120	180(120-240)	0.2(0.1-0.3)
		HR5130	150(120-180)	
K Cast iron	180-250	HR6130	280(180-320)	0.2(0.1-0.4)
		HR5110	200(150-250)	
		HR5120	200(150-250)	

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

Face milling

CFM645series


KAPR=45°

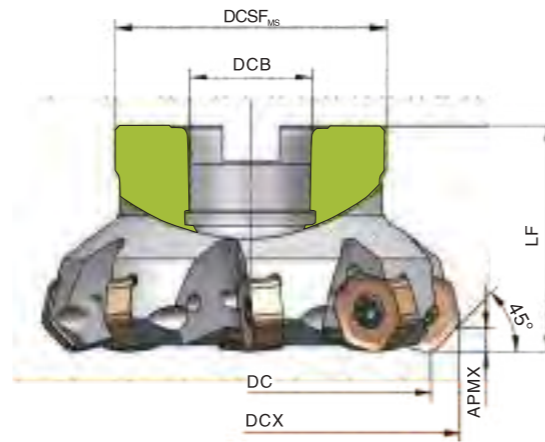

Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench		
			DC	DCB	DCSF _{MS}	DCX	LF							
CFM645-050A2204-HN09	4	△	50	22	47	61.7	40	5	A		HTT15IP			
CFM645-063A2206-HN09	6	△	63	22	47	74.7	40	5						
CFM645-080A2706-HN09	6	△	80	27	62	91.7	50	5						
CFM645-080A2708-HN09	8	▲	80	27	62	91.7	50	5						
CFM645-100A3206-HN09	6	△	100	32	77	111.7	50	5						
CFM645-100A3208-HN09	8	▲	100	32	77	111.7	50	5						
CFM645-100A3210-HN09	10	△	100	32	77	111.7	50	5						
CFM645-125B4006-HN09	6	△	125	40	90	136.7	63	5				B	HNMX0906□□	M45110
CFM645-125B4008-HN09	8	△	125	40	90	136.7	63	5						
CFM645-125B4010-HN09	10	△	125	40	90	136.7	63	5						
CFM645-125B4012-HN09	12	△	125	40	90	136.7	63	5						
CFM645-160C4008-HN09	8	△	160	40	92	171.7	63	5	C		HAT15IP			
CFM645-160C4012-HN09	12	▲	160	40	92	171.7	63	5						
CFM645-160C4014-HN09	14	△	160	40	92	171.7	63	5						
CFM645-200C6010-HN09	10	△	200	60	175	211.7	63	5						
CFM645-250C6014-HN09	14	△	250	60	210	261.7	63	5						
CFM645-315D6016-HN09	16	△	315	60	250	326.7	80	5						

▲Standing inventory △Make-to-order

Applicable inserts HNMX □□



Working condition: ● Stable ● Average ✚ Tough

Applicable inserts	Workpiece material	Working condition													
		Working condition: ● Stable ● Average ✚ Tough													
		●	✚	●	●	●	●	●	●	●	●	●	●	●	●
Applicable inserts	P Steel	●	✚	●	●	●	●	●	●	●	●	●	●	●	●
	M Stainless steel			●	●	●	●	●	●	●	●	●	●	●	●
	K Cast iron	●	✚	●	●	●	●	●	●	●	●	●	●	●	●
	N Non-ferrous metal														●
	S Heat resistant super alloys Titanium alloy													✚	●

Type	Dimension (mm)					APMX (mm)	Working condition												
	IC	S	D1	BS	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10
HNMX0906ANSN-M	16.5	6.34	4.9	1.0	1.2	5	★	☆	☆	★	★	★							
HNMX0906ANSN-R	16.5	6.34	4.9	1.0	1.2	5	★	☆	☆	★	★	★							

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Steel	≤180	HR5120	270(220-350)	0.3(0.1-0.5)
		HR5220	240(200-320)	
		HR5130	220(200-320)	
	180-280	HR5110	240(200-320)	0.2(0.1-0.4)
		HR5120	200(160-280)	
		HR5220	200(160-280)	
280-350	HR5130	200(160-260)	0.15(0.1-0.3)	
	HR5110	220(170-340)		
	HR5210	200(150-280)		
M Stainless steel	≤270	HR5120	180(120-240)	0.2(0.1-0.3)
		HR5130	150(120-180)	
		HR5220	180(150-250)	
K Cast iron	180-250	HR6130	280(180-320)	0.2(0.1-0.4)
		HR5110	200(150-250)	
		HR5120	200(150-250)	


A General turning
 B Indexable milling
 C Solid carbide drill
 Threading
 Parting and grooving
 Turning of small components
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Solid carbide drill
 Threading
 Parting and grooving
 Turning of small components
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Face milling

CFM745series

KAPR=45°

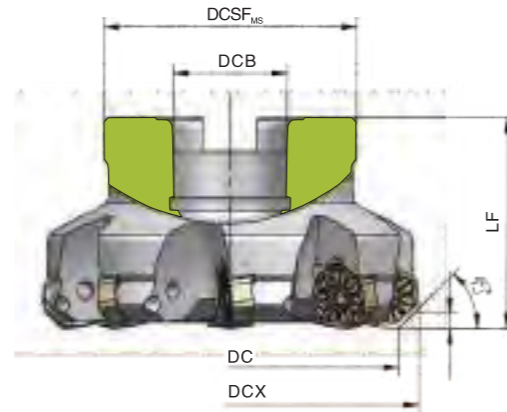


Tool specification	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{MS}	DCX	LF					
CFM745-040A1603-XN07	3	△	40	16	35	49.6	40	4.4	A	M35120	HTT15IP	
CFM745-050A2204-XN07	4	▲	50	22	47	59.6	40	4.4				
CFM745-050A2205-XN07	5	△	50	22	47	59.6	40	4.4				
CFM745-063A2205-XN07	5	▲	63	22	47	72.6	40	4.4				
CFM745-063A2206-XN07	6	△	63	22	47	72.6	40	4.4				
CFM745-080A2706-XN07	6	△	80	27	62	89.6	50	4.4				
CFM745-080A2707-XN07	7	▲	80	27	62	89.6	50	4.4				
CFM745-100A3207-XN07	7	▲	100	32	77	109.6	50	4.4				
CFM745-100A3208-XN07	8	△	100	32	77	109.6	50	4.4				
CFM745-125B4008-XN07	8	△	125	40	90	134.6	63	4.4				
CFM745-125B4010-XN07	10	△	125	40	90	134.6	63	4.4				
CFM745-160C4011-XN07	11	△	160	40	92	169.6	63	4.4				
CFM745-160C4012-XN07	12	△	160	40	92	169.6	63	4.4				
CFM745-063A2205-XN09	5	△	63	22	47	79	50	50	A	M50130	HTT20IP	
CFM745-080A2706-XN09	6	△	80	27	62	93	50	50				
CFM745-100A3207-XN09	7	△	100	32	77	113	50	50				
CFM745-100A3208-XN09	8	△	100	32	77	113	50	50	B	M50130	HTT20IP	
CFM745-125B4008-XN09	8	△	125	40	90	138	63	63				
CFM745-125B4010-XN09	10	△	125	40	90	138	63	63	C	M50130	HAT20IP	
CFM745-160C4009-XN09	9	△	160	40	92	173	63	63				
CFM745-160C4010-XN09	10	△	160	40	92	173	63	63				
CFM745-200C6012-XN09	12	△	200	60	175	213	63	63				

▲Standing inventory △Make-to-order

Applicable inserts

XN □□



Working condition: ● Stable ● Average ✦ Tough

Applicable inserts	Workpiece material	Dimension (mm)						APMX (mm)	Working condition												
		IC	S	D1	BS	RE	CVD		PVD						Cemented carbide	Cermet					
Type								HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
XNMX070508-M	P Steel	14.5	5.02	4.0	1.0	0.8	4.4	★	☆	☆	★	★	★								●
XNMX0705ANN-M	M Stainless steel	14.5	5.02	4.0	1.0	0.8	4.4	★	☆	☆	★	★	★								●
XNGX0705ANN-R	K Cast iron	14.5	5.02	4.0	1.0	0.8	4.4	★	☆	☆	★	★	★								●
XNMX090612-M	N Non-ferrous metal	19.05	6.22	5.5	1.0	1.2	6.0	★	☆	☆	★	★	★								●
XNGX0906-W	S Heat resistant super alloys Titanium alloy	19.05	6.28	2.8	2.0	1.2	6.0	★													●

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data			
			Cutting speed vc (m/min)	Feed rate fz(mm/z)		
P Low-carbon steel, mild steel	≤180	HR5120	270(220-350)	0.3(0.1-0.5)		
		HR5220	240(200-320)			
		HR5130	220(200-320)			
		High-carbon steel, alloy steel	180-280	HR5110	240(200-320)	0.2(0.1-0.4)
				HR5120	200(160-280)	
				HR5220	200(160-280)	
Alloy tool steel	280-350	HR5130	200(160-260)	0.15(0.1-0.3)		
		HR5110	220(170-340)			
		HR5210	200(150-280)			
M Stainless steel	≤270	HR5120	180(120-240)	0.2(0.1-0.3)		
		HR5130	150(120-180)			
K Cast iron	180-250	HR6130	280(180-320)	0.2(0.1-0.4)		
		HR5110	200(150-250)			
		HR5120	200(150-250)			


A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Square shoulder milling

CSM188 series

KAPR=88°

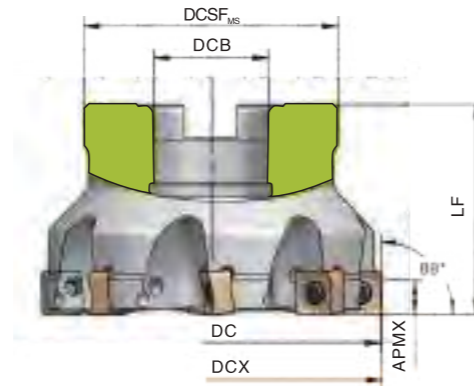


Tool specification and model	Number of edges	Inventory	Dimension (mm)					APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{ms}	DCX	LF					
CSM188-050A2204-SN10	4	▲	50	22	47	50.7	40	8	SN□X1005□	M35100	HTT10IP	
CSM188-050A2205-SN10	5	△	50	22	47	50.7	40	8				
CSM188-063A2205-SN10	5	▲	63	22	47	63.7	40	8				
CSM188-063A2206-SN10	6	△	63	22	47	63.7	40	8				
CSM188-080A2706-SN10	6	▲	80	27	62	80.7	50	8				
CSM188-080A2708-SN10	8	△	80	27	62	80.7	50	8				
CSM188-100A3206-SN10	6	△	100	32	77	100.7	50	8				
CSM188-100A3208-SN10	8	▲	100	32	77	100.7	50	8				
CSM188-100A3211-SN10	11	△	100	32	77	100.7	50	8				
CSM188-125B4008-SN10	8	△	125	40	90	125.7	63	8				
CSM188-125B4010-SN10	10	▲	125	40	90	125.7	63	8				
CSM188-125B4014-SN10	14	△	125	40	90	125.7	63	8				
CSM188-160C4008-SN10	8	△	160	40	92	160.7	63	8				
CSM188-160C4012-SN10	12	△	160	40	92	160.7	63	8				
CSM188-160C4014-SN10	14	△	160	40	92	160.7	63	8				

▲Standing inventory △Make-to-order

Square shoulder milling

SFM188 series

KAPR=88°

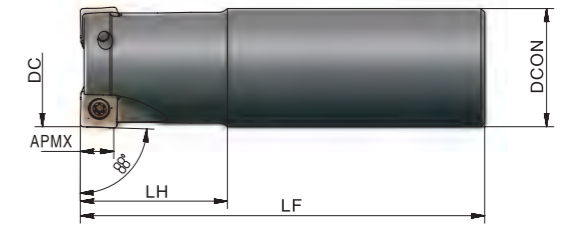

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DC	DCON	LF	LH				
SSM188-032G3202-SN10	2	▲	32	32	110	32.8	8	SN□X1005□	M35100	HTT10IP
SSM188-032G3203-SN10	3	△	32	32	110	32.8	8			
SSM188-040G3203-SN10	3	△	40	32	110	40.8	8			
SSM188-040G3204-SN10	4	△	40	32	110	40.8	8			
SSM188-040G3204-SN10	4	△	40	32	110	40.8	8			


▲Standing inventory △Make-to-order

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Applicable inserts

SN □□

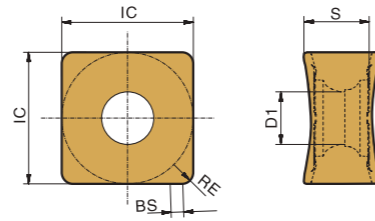

Working condition: ● Stable ● Average ✎ Tough

Type	Dimension (mm)					APMX (mm)	CVD										Cemented carbide	Cermet	
	IC	S	D1	BS	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140			HR7240
SNGX1005ZNN-GM	10.0	5.0	4.0	1.0	0.8	8	★	☆	☆	★	★	★							
SNMX100512-GM	10.0	5.0	4.0	\	1.2	8	★	☆	☆	★	★	★							

★ Recommended grade ☆ Available grade


Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Low-carbon steel, mild steel High-carbon steel, alloy steel Alloy tool steel	≤ 180	HR5120	270(220-350)	0.3(0.1-0.5)
		HR5220	240(200-320)	
		HR5130	220(200-320)	
	180-280	HR5110	240(200-320)	0.2(0.1-0.4)
		HR5120	200(160-280)	
		HR5220	200(160-280)	
	280-350	HR5130	200(160-260)	0.15(0.1-0.3)
		HR5110	220(170-340)	
		HR5210	200(150-280)	
M Stainless steel	≤ 270	HR5120	180(120-240)	0.2(0.1-0.3)
		HR5130	150(120-180)	
K Cast iron	180-250	HR6130	280(180-320)	0.2(0.1-0.4)
		HR5110	200(150-250)	
		HR5120	200(150-250)	

Square shoulder milling

CSM190 series

KAPR=90°

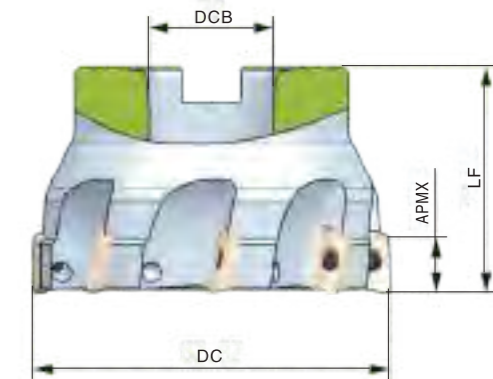

Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	LF					
CSM190-040A1605-AO11	5	△	40	16	40	9.5	A	AOKT11□□	M25065	HFT08IP
CSM190-050A2206-AO11	6	▲	50	22	40	9.5				
CSM190-063A2207-AO11	7	▲	63	22	40	9.5				
CSM190-050A2204-AO16	4	△	50	22	40	14.5		AOKT16□□	M40100	HTT15IP
CSM190-063A2205-AO16	5	▲	63	22	40	14.5				
CSM190-080A2706-AO16	6	▲	80	27	50	14.5				

▲ Standing inventory △ Make-to-order


A General turning
 B Indexable milling
 C Short hole drill

A General turning
 B Indexable milling
 C Short hole drill

Square shoulder milling

SSM190 series

KAPR=90°

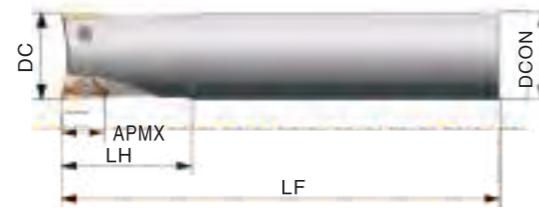


Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DC	DCON	LF	LH				
SSM190-016G1602-AO11	2	▲	16	16	130	40	9.5	AOKT11□□	M25065	HFT08IP
SSM190-016G1602L-AO11	2	△	16	16	160	40	9.5			
SSM190-017G1602-AO11	2	▲	17	16	130	40	9.5			
SSM190-017G1602L-AO11	2	△	17	16	160	40	9.5			
SSM190-020G2002-AO11	2	▲	20	20	130	40	9.5			
SSM190-020G2002L-AO11		△	20	20	160	40	9.5			
SSM190-021G2002L-AO11	2	△	21	20	160	50	9.5			
SSM190-021G2002-AO11	2	▲	21	20	130	50	9.5			
SSM190-025G2503-AO11	3	▲	25	25	120	50	9.5			
SSM190-025G2503L-AO11	3	△	25	25	160	50	9.5			
SSM190-025G2502-AO16	2	▲	25	25	160	50	14.5	AOKT16□□	M40090	HTT15IP
SSM190-025G2502L-AO16	2	△	25	25	200	50	14.5			
SSM190-026G2502-AO16	2	▲	26	25	160	50	14.5			
SSM190-026G2502L-AO16	2	△	26	25	200	50	14.5			
SSM190-032G3202-AO16	2	▲	32	32	160	80	14.5			
SSM190-032G3202L-AO16	2	△	32	32	200	80	14.5			

▲Standing inventory △Make-to-order

Square shoulder milling

KH- series

KAPR=90°

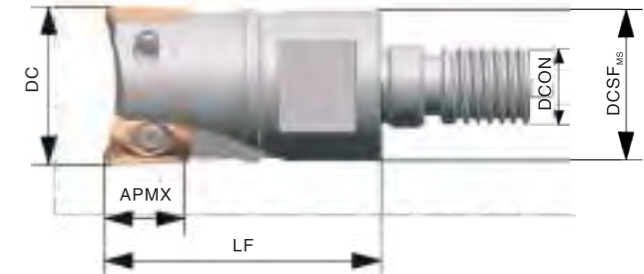

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DC	DCSF _{MS}	LF	DCON				
KH-1102-AOKT06-M05	2	△	11	9	18	5	4.5	AOKT06□□	M18036	HFT05IP
KH-1303-AOKT06-M06	3	△	13	11	18	6	4.5			
KH-1503-AOKT06-M08	3	△	15	14	22	8	4.5			
KH-1704-AOKT06-M08	4	△	17	14	22	8	4.5			
KH-1702-AOKT11-M08	2	△	17	14	25	8	9.5			
KH-2102-AOKT11-M10	2	△	21	18	30	10	9.5			
KH-2603-AOKT11-M12	3	△	26	23	35	12	9.5			
KH-3304-AOKT11-M16	4	△	33	29	40	16	9.5			


▲Standing inventory △Make-to-order

A General turning
 Turning of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Turning of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Applicable inserts

AO □ □

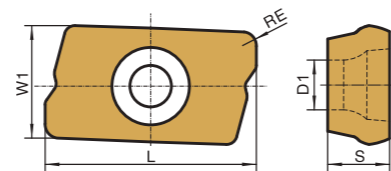

Working condition: ● Stable ◐ Average ✪ Tough

Type	Dimension (mm)					APMX (mm)	CVD PVD											General Carbide	Cermets		
	L	W1	S	D1	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240			HRK10	HRC10
AOKT060202PEER-VM	7.61	4.20	2.38	2.10	0.20	4.5				✪	✪	✪							✪		
AOKT060204PEER-VM	7.61	4.20	2.38	2.10	0.40	4.5				✪	✪	✪							✪		
AOKT060208PEER-VM	7.61	4.20	2.38	2.10	0.80	4.5				✪	✪	✪							✪		
AOKT113504PEER-VM	11.75	6.42	3.50	2.80	0.40	9.5	✪	✪	✪	✪	✪	✪							✪		
AOKT113508PEER-VM	11.75	6.42	3.50	2.80	0.80	9.5	✪	✪	✪	✪	✪	✪							✪		
AOKT113512PEER-VM	11.75	6.42	3.50	2.80	1.20	9.5	✪	✪	✪	✪	✪	✪							✪		
AOKT113516PEER-VM	11.75	6.42	3.50	2.80	1.60	9.5	✪	✪	✪	✪	✪	✪							✪		
AOKT1135120PEER-VM	11.75	6.42	3.50	2.80	2.00	9.5	✪	✪	✪	✪	✪	✪							✪		
AOKT113532PEER-VM	11.75	6.42	3.50	2.80	3.20	9.5	✪	✪	✪	✪	✪	✪							✪		
AOKT160408PEER-VM	17.65	9.64	4.76	4.40	0.80	14.5	✪	✪	✪	✪	✪	✪							✪		
AOKT160412PEER-VM	17.65	9.64	4.76	4.40	1.20	14.5	✪	✪	✪	✪	✪	✪							✪		
AOKT160416PEER-VM	17.65	9.64	4.76	4.40	1.60	14.5	✪	✪	✪	✪	✪	✪							✪		

▲Standing inventory △Make-to-order

Recommended cutting parameters

	Workpiece material	Hardness (HB)	Insert grade	Cutting data	
				Cutting speed vc (m/min)	Feed rate fz(mm/z)
P	Low-carbon steel, mild steel	≤180HB	HR5120	280(220-340)	0.2(0.1-0.3)
			HR5130	180(120-250)	
			HR530	180(120-250)	
	High-carbon steel, alloy steel	180-280HB	HR5110	240(180-300)	0.2(0.1-0.3)
			HR5120	200(140-260)	
			HR5220	200(140-260)	
			HR5130	160(100-220)	
			HR5110	220(140-280)	
	Alloy tool steel	280-350HB	HR5210	160(100-220)	0.15(0.1-0.25)
HR5120			160(100-220)		
HR5220			120(80-180)		
HR5110			160(100-220)		
M	Stainless steel	≤270HB	HR5120	180(100-260)	0.2(0.1-0.3)
			HR5130	140(80-200)	
			HR530	140(80-200)	
K	Cast iron	180-250HB	HR6130	250(150-320)	0.2(0.1-0.3)
			HR5210	180(150-250)	
			HR5220	180(150-250)	
H	Hardened material	45-55HRC	HR5220	150(100-250)	0.2(0.1-0.3)
		≥55HRC	HR5210	120(80-200)	

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

Square shoulder milling

CSM290 series

KAPR=90°

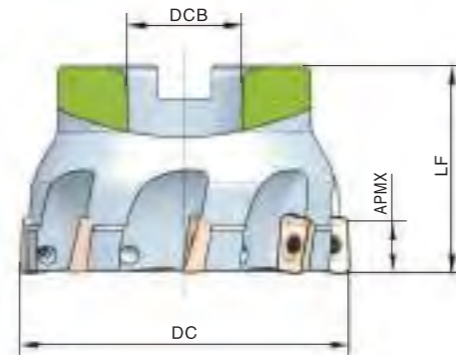


Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	LF					
CSM290-050A2206-AP11	6	△	50	22	40	9.5	A	APKT11	M25065	HAT08IP
CSM290-063A2207-AP11	7	▲	63	22	40	9.5				
CSM290-080A2708-AP11	8	△	80	27	50	9.5				
CSM290-100B3210-AP11	10	△	100	32	50	9.5				
CSM290-050A2204-AP16	4	△	50	22	40	14.5	A	APKT16	M40100	HTT15IP
CSM290-063A2205-AP16	5	▲	63	22	40	14.5				
CSM290-080A2706-AP16	6	▲	80	27	50	14.5	B			
CSM290-100B3208-AP16	8	△	100	32	50	14.5				
CSM290-125B4010-AP16	10	△	125	40	63	14.5				

▲Standing inventory △Make-to-order

Square shoulder milling

SSM290 series

KAPR=90°

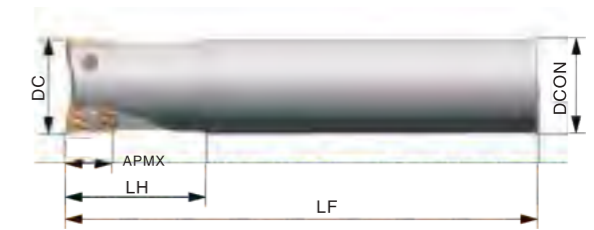

M2.5x6.5 HAT08IP

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench			
			DC	DCON	LF	LH							
SSM290-016G1602-AP11	2	▲	16	16	130	40	9.5	APKT11	M25065	HFT08IP			
SSM290-016G1602L-AP11	2	△	16	16	160	50	9.5						
SSM290-020G2002-AP11	2	▲	20	20	130	40	9.5						
SSM290-020G2002L-AP11	2	△	20	20	160	50	9.5						
SSM290-025G2503-AP11	3	▲	25	25	130	40	9.5						
SSM290-025G2503L-AP11	3	△	25	25	160	50	9.5						
SSM290-032G3204-AP11	4	△	32	32	130	40	9.5						
SSM290-032G3204L-AP11	4	△	32	32	160	50	9.5						
SSM290-025G2502-AP16	2	▲	25	25	160	50	14.5				APKT16	M40090	HTT15IP
SSM290-025G2502L-AP16	2	△	25	25	200	75	14.5						
SSM290-032G3202-AP16	2	△	32	32	160	50	14.5						
SSM290-032G3202L-AP16	2	△	32	32	200	80	14.5						
SSM290-040G3204-AP16	4	△	40	32	160	50	14.5						
SSM290-040G3204L-AP16	4	△	40	32	200	80	14.5						


▲Standing inventory △Make-to-order

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Applicable inserts

AP □□



Working condition: ● Stable ● Average ✱ Tough

Applicable inserts	Workpiece material	Working condition: ● Stable ● Average ✱ Tough											
		P Steel	●	✱	●	●	●	✱	●	✱			
		M Stainless steel			●	●	●	✱	●	●			
	K Cast iron	●	✱	●	●	●	✱						
	N Non-ferrous metal											●	
	S Heat resistant super alloys Titanium alloy								●	●			

Type	Dimension (mm)					APMX (mm)	Working condition: ● Stable ● Average ✱ Tough											
	L	W1	S	D1	RE		CVD					PVD					Cemented carbide	Cermet
						HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10
APKT113604PEER-FM	11.30	6.25	3.60	2.80	0.40	9.5	✱	✱	✱	✱	✱	✱	✱					✱
APKT1136PEER-FM	11.30	6.25	3.60	2.80	0.80	9.5	✱	✱	✱	✱	✱	✱	✱					✱
APKT113612PEER-FM	11.30	6.25	3.60	2.80	1.20	9.5	✱	✱	✱	✱	✱	✱	✱					✱
APKT113620PEER-FM	11.30	6.25	3.60	2.80	2.00	9.5	✱	✱	✱	✱	✱	✱	✱					✱
APKT1605PDER-FM	17.42	9.33	5.20	4.50	0.80	14.5	✱	✱	✱	✱	✱	✱	✱					✱
APKT160512PDER-FM	17.42	9.33	5.20	4.50	1.20	14.5	✱	✱	✱	✱	✱	✱	✱					✱
APKT160520PDER-FM	17.42	9.33	5.20	4.50	2.00	14.5	✱	✱	✱	✱	✱	✱	✱					✱

✱ Recommended grade ✱ Available grade

Recommended cutting parameters


Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P	Low-carbon steel, mild steel ≤180HB	HR5120	280(220–340)	0.2(0.1–0.3)
		HR5130	180(120–250)	
		HR530	180(120–250)	
	High-carbon steel, alloy steel 180–280HB	HR5110	240(180–300)	0.2(0.1–0.3)
		HR5120	200(140–260)	
		HR5220	200(140–260)	
	Alloy tool steel 280–350HB	HR5130	160(100–220)	0.15(0.1–0.25)
		HR5110	220(140–280)	
		HR5210	160(100–220)	
M	Stainless steel ≤270HB	HR5120	180(100–260)	0.2(0.1–0.3)
		HR5130	140(80–200)	
		HR530	140(80–200)	
K	Cast iron 180–250HB	HR6130	250(150–320)	0.2(0.1–0.3)
		HR5210	180(150–250)	
		HR5220	180(150–250)	
H	Hardened material 45–55HRC ≥55HRC	HR5220	150(100–250)	0.2(0.1–0.3)
		HR5210	120(80–200)	

Square shoulder milling

CSM390 series



KAPR=90°

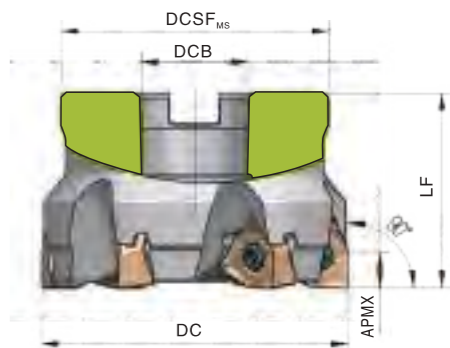

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	DCSF _{MS}	LF					
CSM390-040A1605-ZN04	5	△	40	16	35	40	4.2	ZNMU0403□□	M25065	HAT08IP	
CSM390-040A1607-ZN04	7	△	40	16	35	40	4.2				
CSM390-050A2206-ZN04	6	△	50	22	47	40	4.2				
CSM390-050A2208-ZN04	8	△	50	22	47	40	4.2				
CSM390-063A2207-ZN04	7	△	63	22	47	40	4.2				
CSM390-063A2210-ZN04	10	△	63	22	47	40	4.2				
CSM390-050A2204-ZN08	4	▲	50	22	47	40	7.3				
CSM390-050A2205-ZN08	5	△	50	22	47	40	7.3				
CSM390-063A2205-ZN08	5	▲	63	22	47	40	7.3				
CSM390-063A2206-ZN08	6	△	63	22	47	40	7.3				
CSM390-080A2706-ZN08	6	▲	80	27	62	50	7.3				
CSM390-080A2707-ZN08	7	△	80	27	62	50	7.3				
CSM390-080A2709-ZN08	9	△	80	27	62	50	7.3				
CSM390-100A3207-ZN08	7	▲	100	32	77	50	7.3				
CSM390-100A3208-ZN08	8	△	100	32	77	50	7.3				
CSM390-100A3211-ZN08	11	△	100	32	77	50	7.3				
CSM390-125B4008-ZN08	8	▲	125	40	90	63	7.3				
CSM390-125B4011-ZN08	11	▲	125	40	90	63	7.3				
CSM390-125B4014-ZN08	14	△	125	40	90	63	7.3				
CSM390-160C4010-ZN08	10	△	160	40	92	63	7.3				
CSM390-160C4012-ZN08	12	▲	160	40	92	63	7.3				
CSM390-160C4016-ZN08	16	△	160	40	92	63	7.3				
CSM390-200C6012-ZN08	12	△	200	60	175	63	7.3				
CSM390-200C6016-ZN08	16	△	200	60	175	63	7.3				
CSM390-250C6014-ZN08	14	△	250	60	210	63	7.3				
CSM390-250C6018-ZN08	18	△	250	60	210	63	7.3				

▲Standing inventory △Make-to-order



A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Square shoulder milling

SSM390series

KAPR=90°

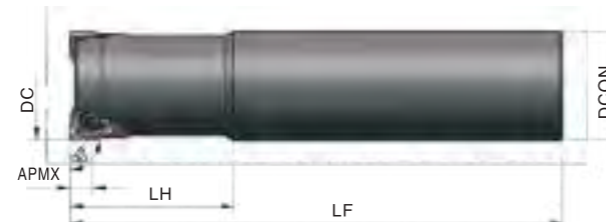


Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DC	DCON	LF	LH				
SSM390-018G1602L-ZN04	2	△	18	16	150	30	4.2	ZNMU0403□□	M25065	HFT08IP
SSM390-020G2002L-ZN04	2	▲	20	20	150	30	4.2			
SSM390-020G2003L-ZN04	3	△	20	20	150	30	4.2			
SSM390-021G2002L-ZN04	2	▲	21	20	150	30	4.2			
SSM390-021G2003L-ZN04	3	△	21	20	150	30	4.2			
SSM390-025G2502L-ZN04	2	▲	25	25	170	30	4.2			
SSM390-025G2503L-ZN04	3	▲	25	25	170	30	4.2			
SSM390-025G2504L-ZN04	4	△	25	25	170	30	4.2			
SSM390-025G2505L-ZN04	5	△	25	25	170	30	4.2			
SSM390-026G2502L-ZN04	2	▲	26	25	170	30	4.2			
SSM390-026G2503L-ZN04	3	△	26	25	170	30	4.2			
SSM390-032G3202L-ZN04	2	▲	32	32	200	30	4.2			
SSM390-032G3203L-ZN04	3	▲	32	32	200	30	4.2			
SSM390-032G3204L-ZN04	4	△	32	32	200	30	4.2			
SSM390-032G3205L-ZN04	5	△	32	32	200	30	4.2			
SSM390-032G3206L-ZN04	6	△	32	32	200	30	4.2			
SSM390-035G3202L-ZN04	2	▲	35	32	200	30	4.2			
SSM390-035G3203L-ZN04	3	▲	35	32	200	30	4.2			
SSM390-035G3204L-ZN04	4	△	35	32	200	30	4.2			
SSM390-040G3204L-ZN04	4	△	40	32	200	30	4.2			
SSM390-040G3205L-ZN04	5	△	40	32	200	30	4.2			
SSM390-040G3206L-ZN04	6	△	40	32	200	30	4.2			

▲Standing inventory △Make-to-order

Square shoulder milling

SSM390series

KAPR=90°



Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DC	DCON	LF	LH				
SSM390-020X2002-ZN04	2	△	20	20	90	30	4.2	ZNMU0403□□	M25065	HFT08IP
SSM390-020X2003-ZN04	3	△	20	20	90	30	4.2			
SSM390-025X2502-ZN04	2	▲	25	25	100	30	4.2			
SSM390-025X2503-ZN04	3	▲	25	25	100	30	4.2			
SSM390-025X2504-ZN04	4	△	25	25	100	30	4.2			
SSM390-025X2505-ZN04	5	△	25	25	100	30	4.2			
SSM390-032X3202-ZN04	2	▲	32	32	110	30	4.2			
SSM390-032X3203-ZN04	3	▲	32	32	110	30	4.2			
SSM390-032X3204-ZN04	4	△	32	32	110	30	4.2			
SSM390-032X3205-ZN04	5	△	32	32	110	30	4.2			
SSM390-032X3206-ZN04	6	△	32	32	110	30	4.2			

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C



Short hole drill

Solid carbide drill

Square shoulder milling

KH-series

KAPR=90°

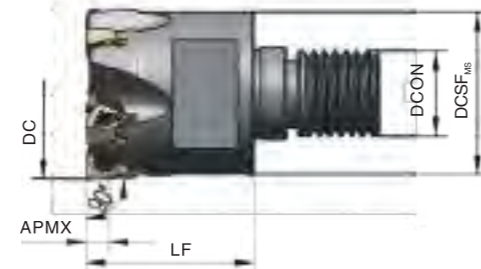


Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DC	DCSF _{ms}	LF	DCON				
KH-2002-ZN04-M10	2	△	20	18	30	10	ZNMU0403□□	M25065	HFT081P	
KH-2003-ZN04-M10	3	△	20	18	30	10				
KH-2502-ZN04-M12	2	△	25	23	30	12				
KH-2503-ZN04-M12	3	△	25	23	30	12				
KH-2504-ZN04-M12	4	△	25	23	30	12				
KH-2505-ZN04-M12	5	△	25	23	30	12				
KH-3202-ZN04-M16	2	△	32	30	40	16				
KH-3203-ZN04-M16	3	△	32	30	40	16				
KH-3204-ZN04-M16	4	△	32	30	40	16				
KH-3205-ZN04-M16	5	△	32	30	40	16				
KH-3206-ZN04-M16	6	△	32	30	40	16				

▲Standing inventory △Make-to-order

Applicable inserts

ZN□□

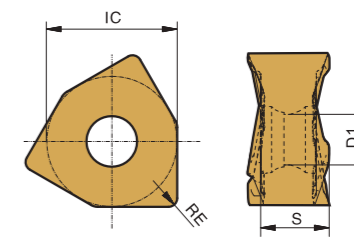

Working condition: ● Stable ● Average □ Tough

Applicable inserts	Workpiece material	Dimension (mm)																		
		IC	S	D1	RE	APMX (mm)	CVD				PVD				Cemented Carbide	Cermet				
Applicable inserts	P Steel	●	□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	M Stainless steel			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	K Cast iron	●	□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	N Non-ferrous metal																			●
	S Heat resistant super alloys Titanium alloy																			●
Type	Dimension (mm)				APMX (mm)	CVD				PVD				Cemented Carbide	Cermet					
	IC	S	D1	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10		
ZNMU040308PNR-GM	7.00	3.65	2.80	0.80	4.2	★	☆	☆	★	★	☆							☆		
ZNMU080608PNR-GM	12.00	6.35	4.60	0.80	7.3	★	☆	☆	★	★	☆							☆		
ZNMU080608PNR-GL	12.00	6.35	4.60	0.80	7.3	★	☆	☆	★	★	☆							☆		
ZNMU080608PNR-GR	12.00	6.35	4.60	0.80	7.3	★	☆	☆	★	★	☆							☆		
ZNMU080616PNR-GR	12.00	6.35	4.60	1.60	7.3	★	☆	☆	★	★	☆							☆		

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Low-carbon steel, mild steel	≤180HB	HR5120	280(220-340)	0.2(0.1-0.3)
		HR5130	180(120-250)	
		HR530	180(120-250)	
	180-280HB	HR5110	240(180-300)	0.2(0.1-0.3)
		HR5120	200(140-260)	
		HR5220	200(140-260)	
280-350HB		HR5130	160(100-220)	0.15(0.1-0.25)
		HR5110	220(140-280)	
		HR5210	160(100-220)	
		HR5120	160(100-220)	
M Stainless steel	≤270HB	HR5120	180(100-260)	0.2(0.1-0.3)
		HR5130	140(80-200)	
		HR530	140(80-200)	
K Cast iron	180-250HB	HR6130	250(150-320)	0.2(0.1-0.3)
		HR5210	180(150-250)	
		HR5220	180(150-250)	
H Hardened material	45-55HRC	HR5220	150(100-250)	0.2(0.1-0.3)
	≥55HRC	HR5210	120(80-200)	

A

General turning

Turning of small components

Parting and grooving

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

Square shoulder milling

CSM590series

KAPR=90°

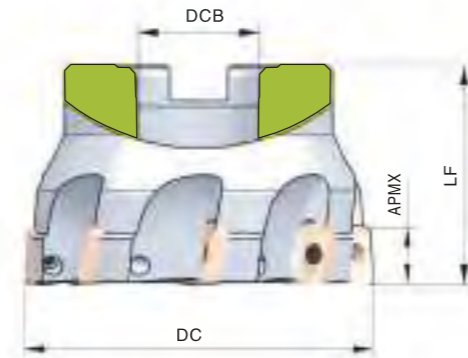


Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DC	DCB	LF					
CSM590-050A2206-AP11	6	△	50	22	40	9.5	A	APMT11□□ APGT11□□	M25065	HAT08IP
CSM590-063A2208-AP11	8	△	63	22	40	9.5				
CSM590-080A2708-AP11	8	▲	80	27	50	9.5				
CSM590-100B3210-AP11	10	△	100	32	50	9.5				
CSM590-050A2205-AP16	5	△	50	22	40	14.5	B	APMT16□□ APGT16□□	M40100	HTT15IP
CSM590-063A2206-AP16	6	△	63	22	40	14.5				
CSM590-080A2707-AP16	7	△	80	27	50	14.5				
CSM590-100B3208-AP16	8	△	100	32	50	14.5				
CSM590-125B4010-AP16	10	△	125	40	63	14.5				

▲Standing inventory △Make-to-order

Square shoulder milling

SSM590series

KAPR=90°

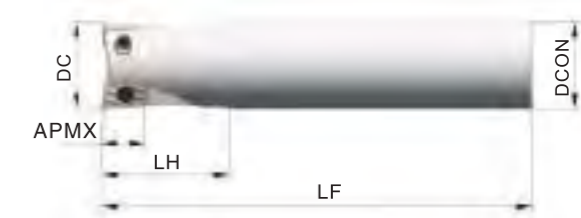

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench			
			DC	DCON	LF	LH							
SSM590-016G1602-AP11	2	△	16	16	130	40	9.5	APMT11□□ APGT11□□	M25065	HFT08IP			
SSM590-016G1602L-AP11	2	△	16	16	160	50	9.5						
SSM590-020G2002-AP11	2	△	20	20	130	40	9.5						
SSM590-020G2002L-AP11	2	△	20	20	160	50	9.5						
SSM590-025G2503-AP11	3	▲	25	25	130	40	9.5						
SSM590-025G2503L-AP11	3	△	25	25	160	50	9.5						
SSM590-032G3204-AP11	4	△	32	32	130	40	9.5						
SSM590-032G3204L-AP11	4	△	32	32	160	50	9.5						
SSM590-025G2502-AP16	2	▲	25	25	160	50	15				APMT16□□ APGT16□□	M40090	HFT15IP
SSM590-025G2502L-AP16	2	△	25	25	200	75	15						
SSM590-032G3202-AP16	2	△	32	32	160	50	15						
SSM590-032G3202L-AP16	2	△	32	32	200	80	15						
SSM590-040G3204-AP16	4	△	40	32	160	50	15						
SSM590-040G3204L-AP16	4	△	40	32	200	80	15						

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Applicable inserts

AP□□

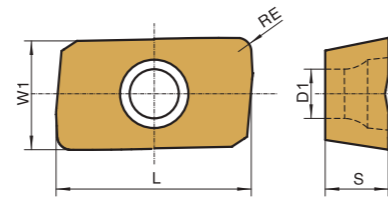

Working condition: ● Stable ● Average □ Tough

Type	Dimension (mm)					APMX (mm)	CVD										Cemented carbide	Cermets	
	L	W1	S	D1	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140			HR7240
APMT1135PDER-HM	11.30	6.25	3.50	2.80	0.80	9.5	★	☆	★	★	★	★	☆						
APMT1605PDER-HM	17.25	9.25	5.22	4.40	0.80	14.5	★	☆	★	★	★	★	☆						
APGT1135PDFR-AK	11.30	6.25	3.50	2.80	0.80	9.5													☆
APGT1604PDFR-AK	17.25	9.25	4.76	4.40	0.80	14.5													☆



★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed vc (m/min)	Feed rate fz(mm/z)
P Low-carbon steel, mild steel	≤ 180HB	HR5120	280(220-340)	0.2(0.1-0.3)
		HR5130	180(120-250)	
		HR530	180(120-250)	
	180-280HB	HR5110	240(180-300)	0.2(0.1-0.3)
		HR5120	200(140-260)	
		HR5220	200(140-260)	
280-350HB	HR5130	160(100-220)	0.15(0.1-0.25)	
	HR5110	220(140-280)		
	HR5210	160(100-220)		
	HR5220	120(80-180)		
M Stainless steel	≤ 270HB	HR5120	180(100-260)	0.2(0.1-0.3)
		HR5130	140(80-200)	
		HR530	140(80-200)	
K Cast iron	180-250HB	HR6130	250(150-320)	0.2(0.1-0.3)
		HR5210	180(150-250)	
		HR5220	180(150-250)	
H Hardened material	45-55HRC	HR5220	150(100-250)	0.2(0.1-0.3)
	≥ 55HRC	HR5210	120(80-200)	

Profile milling

CPM100 series

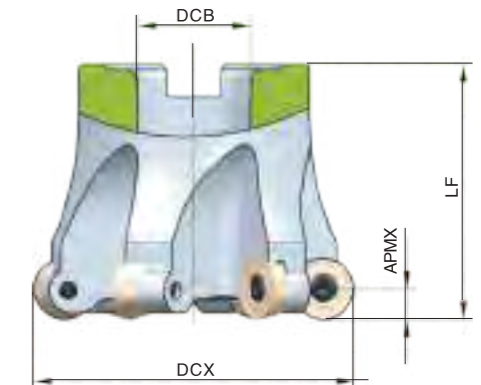

Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DCX	DCB	LF					
CPM100-063A2204-RC12	4	△	63	22	40	6	A	RC□□12	M40100	HTT15IP
CPM100-080B2705-RC16	5	▲	80	27	50	8	B	RC□□16	M50130	HTT20IP
CPM100-100B3206-RC16	6	△	100	32	50	8		RC□□20	M60160	HTT15IP
CPM100-125B4007-RC20	7	△	125	40	63	10				
CPM100-160B4008-RC20	8	△	160	40	63	10				

▲ Standing inventory △ Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

Indexable milling


Solid carbide end mill

Short hole drill

Solid carbide drill

Profile milling

SPM100 series

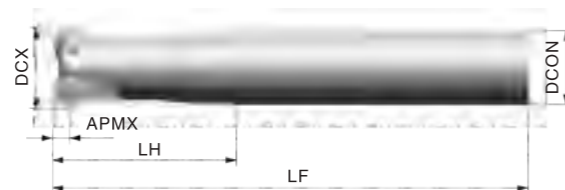


Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DCX	DCON	LF	LH				
SPM100-025G2502-RC10	2	▲	25	25	100	30	5	RC□□10	M40090	HTT15IP
SPM100-032G3203-RC10	3	▲	32	32	120	35	5	RC□□10	M40090	HTT15IP
SPM100-040G4003-RC12	3	△	40	40	120	40	6	RC□□12	M40090	HTT15IP

▲Standing inventory △Make-to-order

Applicable insert

RC□□




Working condition: ● Stable ● Average ■ Tough

Type	Dimension (mm)				APMX (mm)	Working condition														
	IC	S	D1	AN		CVD					PVD					Cemented carbide	Cermat			
						HR6130	HR8140	HR5110	HR6210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140			HR7240	HRK10	HRC10
RCKT10T3MO-FM	10.00	3.97	4.40	7°	5	☆	☆	★	★	★	★	☆								
RCKT1204MO-FM	12.00	4.76	4.40	7°	6	☆	☆	★	★	★	★	☆								
RCKT1606MO-FM	16.00	6.35	5.50	7°	8	☆	☆	★	★	★	★	☆								
RCKT2006MO-FM	20.00	6.35	6.55	7°	10	☆	☆	★	★	★	★	☆								

★ Recommended grade ☆ Available grade

Profile milling

CPM200 series

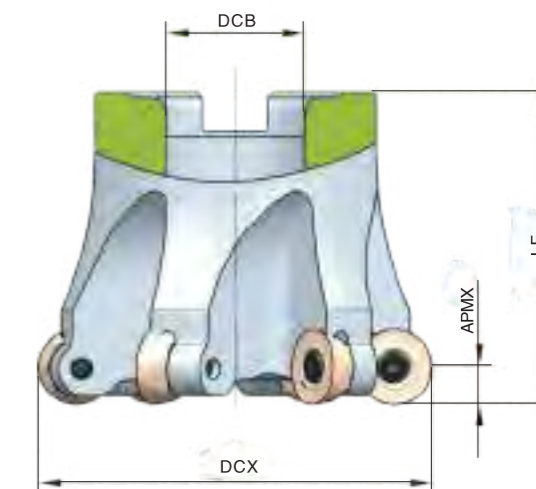

Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DCX	DCB	LF					
CPM200-050A2204-RP12	4	△	50	22	40	6	A			
CPM200-063A2205-RP12	5	▲	63	22	40	6	A	RP□□12	M40100	HTT15IP
CPM200-080B2706-RP12	6	▲	80	27	50	6	B			
CPM200-063A2204-RP16	4	▲	63	22	40	8	A			
CPM200-080B2705-RP16	5	▲	80	27	50	8	B			
CPM200-100B3206-RP16	6	△	100	32	50	8	B	RP□□16	M50130	HTT20IP
CPM200-125B4007-RP16	7	△	125	40	63	8	B			



▲Standing inventory △Make-to-order

A
General turning
Turning of small components
Parting and grooving
Threading
B
Indexable milling
Solid carbide end mill
C
Short hole drill
Solid carbide drill

A
General turning
Turning of small components
Parting and grooving
Threading
B
Indexable milling
Solid carbide end mill
C
Short hole drill
Solid carbide drill

Profile milling


SPM200 series

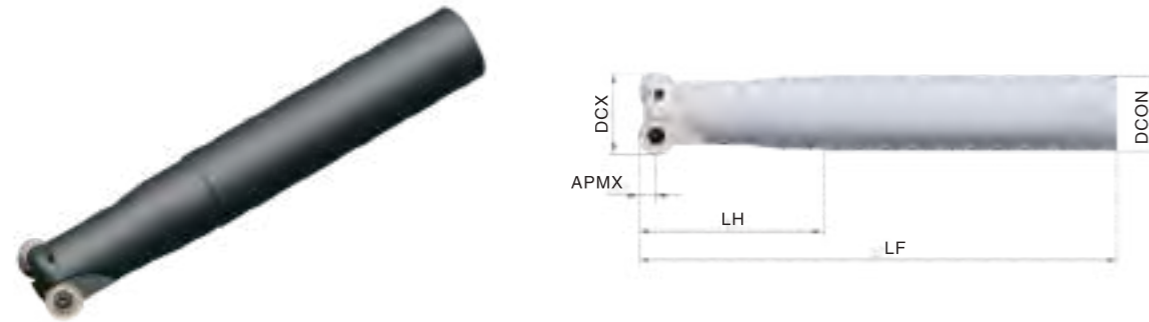

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DCX	DCON	LF	LH				
SPM200-025G2503-RP08	3	▲	25	25	100	30	4	RP□□08	M30075	HFT09IP
SPM200-032G3204-RP08	4	▲	32	32	120	35	4	RP□□08	M30075	HFT09IP
SPM200-025G2502-RP10	2	▲	25	25	100	30	5	RP□□10(SM)	M40090	HTT15IP
SPM200-032G3203-RP10	3	▲	32	32	120	35	5	RP□□10(MS)	M40090	HTT15IP
SPM200-040G3203-RP12	3	△	40	32	120	40	6	RP□□12	M40090	HTT20IP

▲Standing inventory △Make-to-order

Applicable inserts RP□□

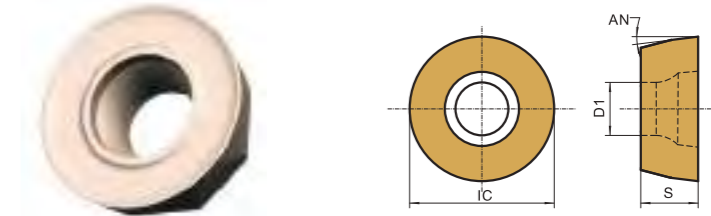

Working condition: ● Stable ● Average ✘ Tough

Type	Dimension (mm)				APMX (mm)	Working condition												
	IC	S	D1	AN		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10
RPMT08T2MO-HM	8.00	2.78	3.40	11°	4	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPMW1003MO	10.00	3.18	4.50	11°	5	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPMT1204MO-HM	12.00	4.76	4.40	11°	6	✘	✘	●	●	●	●	●	●	●	●	●	●	●

▲Standing inventory △Make-to-order

Turbine blade milling

Working condition: ● Stable ● Average ✘ Tough

Type	Dimension (mm)				APMX (mm)	Working condition												
	IC	S	D1	AN		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10
RPKT10T3MO-MS	10.00	3.97	3.40	11°	5	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPKT1204MO-MS	12.00	4.76	4.40	11°	6	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPKT1606MO-MS	16.00	6.35	5.50	11°	8	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPMT08T2MO-SM	8.00	2.78	3.40	11°	4	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPMT10T3MO-SM	10.00	3.97	4.40	11°	5	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPMT1204MO-SM	12.00	4.76	4.40	11°	6	✘	✘	●	●	●	●	●	●	●	●	●	●	●
RPMT1606MO-SM	16.00	6.35	5.50	11°	8	✘	✘	●	●	●	●	●	●	●	●	●	●	●

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill



C

Short hole drill

Solid carbide drill

Profile milling

CPM300 series

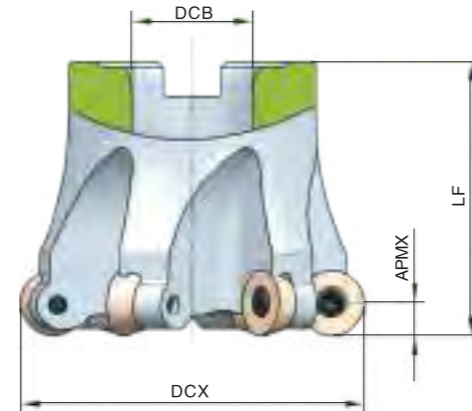



Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DCX	DCB	LF					
CPM300-050A2204-RD12	4	△	50	22	40	6	A	RD□□12	M40100	HTT15IP
CPM300-063A2205-RD12	5	▲	63	22	40	6				
CPM300-080B2705-RD16	5	▲	80	27	50	8	B	RD□□16	M50130	HTT20IP HAT20IP
CPM300-100B3206-RD16	6	△	100	32	50	8				
CPM300-125B4007-RD16	7	△	125	40	63	8				
CPM300-160B4008-RD16	8	△	160	40	63	8				

▲Standing inventory △Make-to-order

Profile milling

SPM300 series

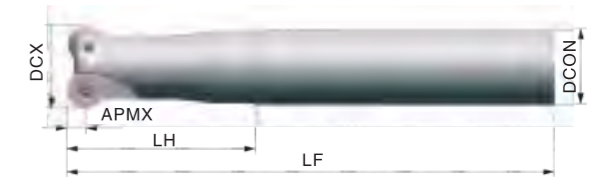

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DCX	DCON	LF	LH				
SPM300-020G2003-RD06	3	△	20	20	100	30	3	RD□□06	M22065	HFT07IP
SPM300-020G2002-RD08	2	△	20	20	100	30	4	RD□□08	M30075	HFT09IP
SPM300-025G2502-RD10	2	▲	25	25	100	30	5	RD□□10	M40084	HFT15IP
SPM300-032G3203-RD10	3	▲	32	32	120	35	5			
SPM300-040G3203-RD12	3	△	40	32	120	40	6	RD□□12	M40090	HTT15IP

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Applicable inserts

RD □□



Working condition: ● Stable ● Average □ Tough

Type	Dimension (mm)				APMX (mm)	CVD												Cemented carbide		Cermet
	IC	S	D1	AN		PVD						CVD						HRK10	HRC10	
						HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240				
RDMW0602MO	6.00	2.38	2.50	15°	3	☆	☆	★	★	★	★	★	★	☆						
RDMW0802MO	8.00	2.38	3.40	15°	4	☆	☆	★	★	★	★	★	★	☆						
RDMW10T3MO	10.00	3.97	4.50	15°	5	☆	☆	★	★	★	★	★	★	☆						
RDMW1204MO	12.00	4.76	5.50	15°	6	☆	☆	★	★	★	★	★	★	☆						
RDMW1605MO	16.00	5.56	5.50	15°	8	☆	☆	★	★	★	★	★	★	☆						
RDKW10T3MO	10.00	3.97	4.50	15°	5	☆	☆	★	★	★	★	★	★	☆						
RDKW1204MO	12.00	4.76	4.40	15°	6	☆	☆	★	★	★	★	★	★	☆						
RDKW1604MO	16.00	4.76	5.50	15°	8	☆	☆	★	★	★	★	★	★	☆						

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	Tool specification		
				Ø20	Ø25	Ø32
Low-carbon steel, mild steel	≤ 180HB	HR5120 HR5220 HR5130 HR530	v_c (m/min)	100–200	100–200	100–200
			f_z (mm/z)	0.2–0.3	0.25–0.35	0.25–0.35
			a_p (mm)	1.25	1.5	2
			a_e (mm)	1.25	1.5	2
High-carbon steel, alloy steel	180–280HB	HR5110 HR5210 HR5120 HR5220	v_c (m/min)	80–180	80–180	80–180
			f_z (mm/z)	0.2–0.3	0.25–0.35	0.25–0.35
			a_p (mm)	1.25	1.5	2
			a_e (mm)	1.25	1.5	2
Alloy tool steel	280–350HB	HR5110 HR5210 HR5120 HR5220	v_c (m/min)	60–150	60–150	60–150
			f_z (mm/z)	0.2–0.3	0.25–0.35	0.25–0.35
			a_p (mm)	1.25	1.5	2
			a_e (mm)	1.25	1.5	2
Stainless steel	≤ 180HB	HR5120 HR5130 HR530	v_c (m/min)	70–150	70–150	70–150
			f_z (mm/z)	0.1–0.25	0.2–0.3	0.2–0.3
			a_p (mm)	1	1.25	1.5
			a_e (mm)	1	1.25	1.5
Cast iron	180–250HB	HR6130 HR5110 HR5120 HR5220	v_c (m/min)	160–300	160–300	160–300
			f_z (mm/z)	0.25–0.35	0.3–0.4	0.3–0.4
			a_p (mm)	1.8	2	2.5
			a_e (mm)	1.8	2	2.5
Heat resistant super alloy titanium alloy	≤ 400HB	HR7140 HR7240	v_c (m/min)	40–120	40–120	40–120
			f_z (mm/z)	0.25–0.35	0.3–0.5	0.3–0.5
			a_e (mm)	1	1.25	1.5
Hardened steel	50–65HRC	HR6130 HR5110 HR5120 HR5220	v_c (m/min)	80–160	80–160	80–160
			f_z (mm/z)	0.2–0.5	0.3–0.6	0.4–0.8
			a_p (mm)	0.2	0.3	0.5
			a_e (mm)	1	1.25	1.5

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

▶ Technical data of application of profile milling tools

◆ Conversion factor for feed rate (based on the benchmark of cutting depth)

Model	Maximum cutting depth ap	Conversion factor for feed rate							
		ap/(mm)							
		0.5	1.0	1.5	2.0	2.5	3.0	4.0	5.0
R□□08□□	4	1.7	1.3	1.1	1(Benchmark)	0.9	0.8	0.7	0.7
R□□10□□	5	1.9	1.4	1.2	1	1(Benchmark)	0.9	0.8	0.7
R□□12□□	6	2.1	1.5	1.3	1.1	1	1(Benchmark)	0.9	0.8
R□□16□□	8	2.4	1.7	1.4	1.3	1.1	1.1	1(Benchmark)	0.9
R□□20□□	10	2.5	1.8	1.5	1.4	1.2	1.1	1	1(Benchmark)

Calculation example:


The recommended feed rate for RCKT10T3MO-FM to process 45# steel is 0.2mm/r. When ap=1mm, the corresponding recommendation for feed rate is:

$$f=1.4 \times 0.2 \text{mm/r} = 0.28 \text{mm/r}$$

◆ Recommended machining parameters for ramp milling, helical milling, drill-milling, etc.

Tool specification			Ramp milling		Helical milling		Drill-milling	
Insert	Tool diameter (mm)	Cutting depth maximum (mm)	Ramping angle maximum	Cutting length (mm)	Machined hole diameter minimum (mm)	Machined hole diameter maximum (mm)	Machining depth maximum (mm)	Machining diameter minimum (mm)
R08	16	4	8°	28	20	30	0.7	9
	20		9°	25	26	38	1.4	13
	25		5°	45	36	48	1.4	18
R10	25	5	5°	28	33	48	0.6	16
	32		6°	47	47	62	1.9	23
	40		4°	71	63	78	1.9	31
R12	63	6	3°	95	109	124	1.9	54
	40		5°	68	59	78	2.4	29
	63		2°	171	105	124	2.4	52
R16	80	8	2°	171	139	158	2.4	69
	100		1°	171	179	198	2.4	89
	63		4°	114	97	124	3.4	48
R16	80	8	3°	152	131	158	3.4	65
	100		2°	229	171	198	3.4	85
	125		1°	458	221	248	3.4	110


◆ Precautions for drill-milling

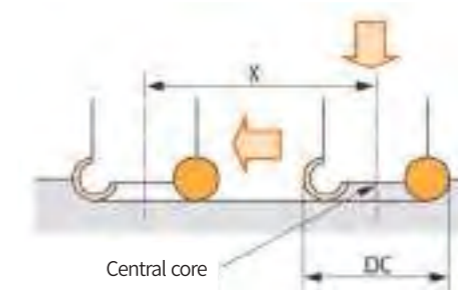

When transverse feed machining after drill-milling:

- ① The feed rate of the table should be reduced to that of half of the general horizontal machining until the central section is completely removed.
- ② The cutting length minimum X for flattening the bottom is shown in the table above.

◆ Precautions for ramp milling

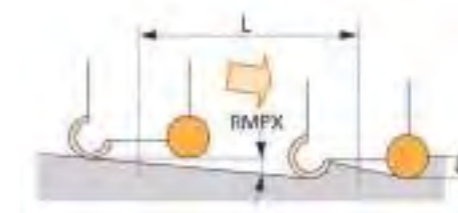

Please set the angle of machining below RMPX.
Set the feed rate below 70% of the standard.

◆ Precautions for helical machining


- ① Please set the feed rate per revolution of the helical machining below the cutting depth ap maximum.
- ② The axial angle created by the trajectory of the tool center should not exceed the inclination angle RMPX maximum for machining.
- ③ Set the feed rate below 70% of the standard.

◆ Recommended maximum cutting depth (ap) and applicable teeth number

Teeth number of cutterhead	R08	R10	R12	R16	R20
≤3	ap=2.0-4.0mm	ap=2.5-5.0 mm	ap=3.0-6.0 mm	ap=4.0-8.0 mm	ap=5.0-10.0 mm
>3	ap<2.0 mm	ap<2.5 mm	ap<6.0 mm	ap<4.0 mm	ap<5.0 mm

Millings with high feed

CEM100 series


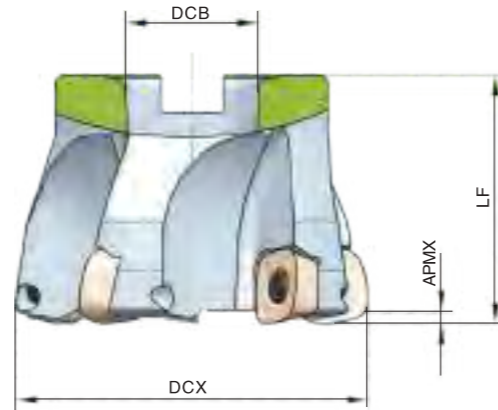


Tool specification	Number of edges	Inventory	Dimension (mm)			APMX (mm)	Interface form	Applicable inserts	Screw	Wrench
			DCX	DCB	LF					
CEM100-050A2204-SD12	4	△	50	22	40	2.3	A	SD□□12	M40100	HTT151P
CEM100-063A2705-SD12	5	▲	63	27	40	2.3				
CEM100-080A2706-SD12	6	△	80	27	50	2.3				
CEM100-063A2704-SD15	4	▲	63	27	40	2.9		SD□□15	M50130	HTT201P
CEM100-080A3205-SD15	5	△	80	32	50	2.9				
CEM100-100A3206-SD15	6	△	100	32	50	2.9				

▲Standing inventory △Make-to-order

Millings with high feed

SEM100 series

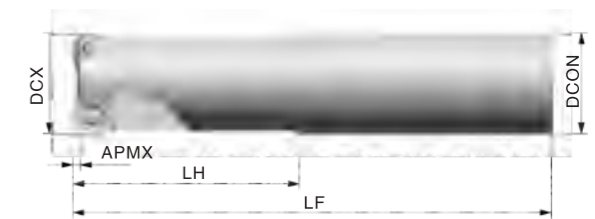

Tool specification	Number of edges	Inventory	Dimension (mm)				APMX (mm)	Applicable inserts	Screw	Wrench
			DCX	DCB	LF	LH				
SEM100-032G3202-SD12	2	▲	32	32	150	70	2.3	SD□□12	M40090	HTT151P
SEM100-040G4003-SD12	3	△	40	40	150	70	2.3			
SEM100-040G4002-SD15	2	▲	40	40	200	70	2.9	SD□□15	M50130	HTT201P

▲Standing inventory △Make-to-order

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Applicable inserts

SD □□



Working condition: ● Stable ● Average ✱ Tough

Type	Dimension (mm)					APMX (mm)	CVD										Cemented carbide	Cermets		
	IC	S	D1	AN	RE		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140			HR7240	HRK10
SDMT1205ZTN-FM	12.700	5.56	4.6	15°	3.00	2.3	✱	✱	✱	✱	✱	✱	✱	✱						
SDMT1505ZTN-FM	15.875	5.56	5.5	15°	0.80	2.9	✱	✱	✱	✱	✱	✱	✱							
SDMW1205ZTN	12.700	5.56	4.6	15°	3.00	2.3	✱	✱	✱	✱	✱	✱	✱							
SDMW1505ZTN	15.875	5.56	5.5	15°	0.80	2.9	✱	✱	✱	✱	✱	✱	✱							

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting speed vc (m/min)	Ø20 / Ø25		Ø30 / Ø35		Ø40	
				Axial cutting depth (mm)	Feed rate per tooth (mm)	Axial cutting depth (mm)	Feed rate per tooth (mm)	Axial cutting depth (mm)	Feed rate per tooth (mm)
P Low-carbon steel, mild steel	≤ 180	HR5120	200(120-220)	0.3-1.5	0.6-1.2	0.3-1.2	0.5-1.4	0.3-1.5	0.8-1.5
		HR5220	200(120-220)	0.3-1.5	0.6-1.2	0.3-1.2	0.5-1.4	0.3-1.5	0.8-1.5
		HR5130	160(80-180)	0.2-1.2	0.6-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.6-1.5
		HR530	160(80-180)	0.2-1.2	0.6-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.6-1.5
P High-carbon steel, alloy steel Alloy tool steel	180-350	HR5110	120(80-220)	0.1-0.5	0.3-0.7	0.1-0.5	0.4-0.8	0.15-0.6	0.5-1.0
		HR5120	120(80-220)	0.1-0.5	0.3-0.7	0.1-0.5	0.4-0.8	0.15-0.6	0.5-1.0
		HR5210	150(100-250)	0.2-0.8	0.3-0.8	0.2-1.0	0.4-1.0	0.2-1.0	0.5-1.0
		HR5220	150(100-250)	0.2-0.8	0.3-0.8	0.2-1.0	0.4-1.0	0.2-1.0	0.5-1.0
M Stainless steel	≤ 180	HR5120	150(80-190)	0.3-1.0	0.6-1.0	0.3-1.2	0.6-1.2	0.3-1.2	0.5-1.6
		HR5130	150(80-190)	0.3-1.0	0.6-1.0	0.3-1.2	0.6-1.2	0.3-1.2	0.5-1.6
		HR530	180(80-190)	0.3-1.0	0.5-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.8-1.6
K Cast iron	180-250	HR6130	250(80-190)	0.3-1.0	0.5-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.8-1.6
		HR5110	180(80-190)	0.3-1.0	0.5-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.8-1.6
		HR5120	180(80-190)	0.3-1.0	0.5-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.8-1.6
		HR5220	180(80-190)	0.3-1.0	0.5-1.2	0.2-1.0	0.5-1.4	0.2-1.2	0.8-1.6

Technical information of application of high feed milling tools (C/SEM100)

Ramp milling angle and cutting length


Type	Tool diameter mm	32	40	50	63	80	100
SD□□12□□	Maximum ramping angle (RMPX)	3.5°	2.8°	2.5°	1.7°	1°	
SD□□15□□	Maximum ramping angle (RMPX)		2.5°	2.2°	1.5°	0.8°	0.5°
	Cutting length (L)	ap / tanRMPX					



Please set the angle of ramping machining below RMPX. Set the feed rate below 70% of the standard.

Figure Illustration of ramp milling

Precautions for drill-milling

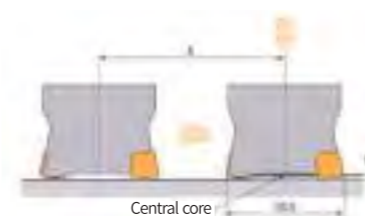


Central core

Tool model	Drilling depth maximum	Cutting length minimum for bottom flattening
C/SEM100**SD12	1.5mm	Tool diameterDc-16
C/SEM100**SD15	2mm	Tool diameterDc-25

Notes: When transverse feed machining after drilling:

- The feed rate should be reduced to that of half of the general horizontal machining until the core is completely removed.
- When drilling holes, set the axial feed rate per revolution below f=0.2 (mm/rev).

Sidewall drill-milling




Notes: The recommended feed of sidewall milling is below 0.2 mm/z.

Insert model	Crosscutting depth maximum (ae)
SD**12	10mm
SD**15	12mm

Precautions for helical machining

Please conduct helical machining within the range of maximum and minimum machining diameters.

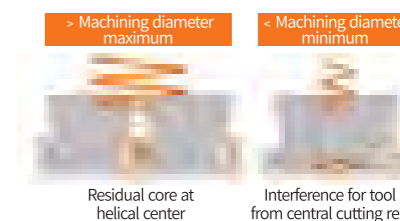

Tool model	Machining diameter minimum	Machining diameter maximum
C/SEM100**12	2*DC-16	2*DC-2
C/SEM100**15	2*DC-26	2*DC-2

Notes: ① The sinking depth (h) per circle is lower than the longitudinal cutting depth maximum (APMX); ② Set the table feed below 50% of the recommended value.


Setting approximate R angle—in writing program

Model	Cutting edge angle	Approximate R angle	Cutting residual amount (K/mm)	Inclination angle maximum during contour machining
C/SEM100**SD12	10°	3.0	0.85	90°
C/SEM100**SD15	10°	3.5	1.37	90°

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading Parting and grooving
 Tiring of small components
 Solid carbide drill
 Solid carbide end mill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading Parting and grooving
 Tiring of small components
 Solid carbide drill
 Solid carbide end mill


▶ Technical information of application of high feed milling tools (C/SEM200)

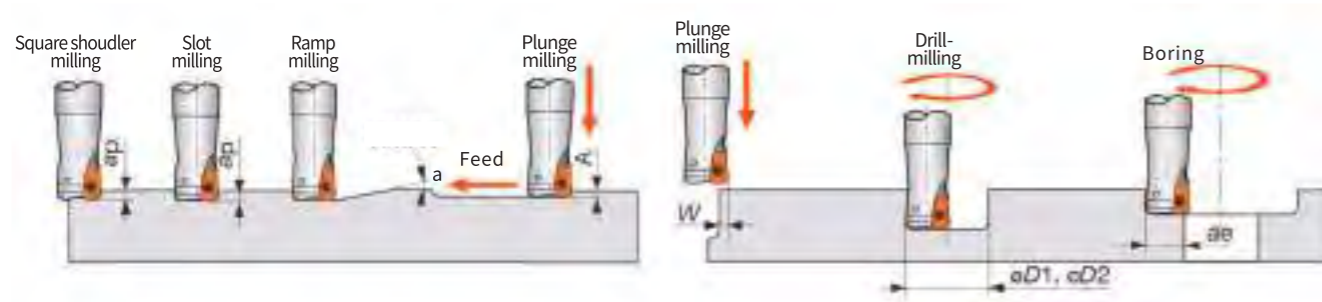

Insert type	Tools diameter	D=16mm	D=20mm	D=25mm	D=32mm	D=40mm	D=50mm	D=63mm
LNKU0303	Max ramping angle a	1.7°	1.3°	0.9°	0.7°	0.5°	0.4°	0.3°
	Max depth of plunge milling A	0.3mm	0.3mm	0.3mm	0.3mm	0.3mm	0.3mm	0.3mm
	Max width of plunge milling W	3mm	3mm	3mm	3mm	3mm	3mm	3mm
	Min diameter of hole D1	23mm	31mm	41mm	54mm	70mm	90mm	105mm
	Max diameter of hole D2	30mm	38mm	48mm	62mm	78mm	98mm	113mm

◆ The formula of cutting length L base on max inclination angle $L = \max.ap / \tan(a)$

◆ Residual of face milling

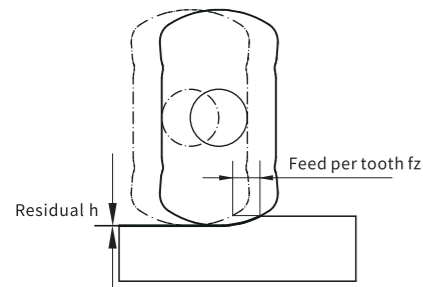


Insert type	Feed per tooth fz (mm/z)	Residual h (mm)
LNU0303□□	0.5	0.014
	0.8	0.035
	1.0	0.055
	1.2	0.08
	1.5	0.125

◆ Tool geometry during programming

When programming, the corner radius should be set to R=1.5mm. If a larger R setting, overcut may occur. The table below shows the residual amount t1 and the overcut amount t2.


APMX	RE	Programming R setting	Residual t1	Overcut t2
1.0mm	1.2mm	1.0	0.045mm	
1.0mm	1.2mm	1.5	0.035	
1.0mm	1.2mm	2.0	0.2mm	0.1mm
1.0mm	1.2mm	2.5	0.08mm	0.29mm

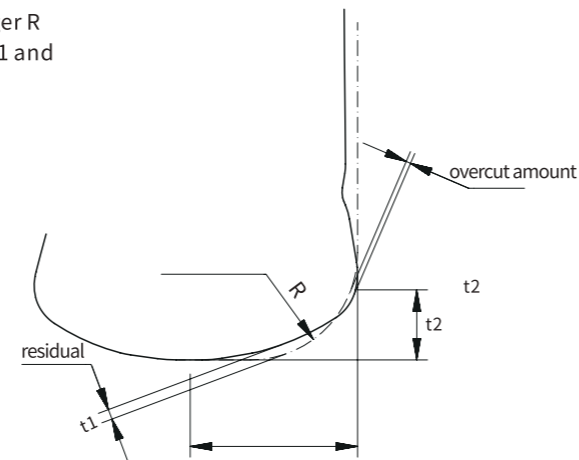

Helical end milling

CHM190 series

KAPR=90°

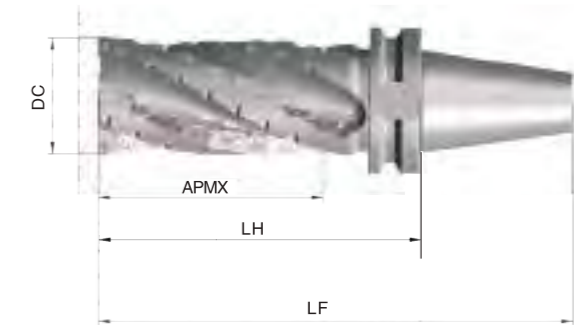

Tool specification	Number of slots	Inventory	Dimension (mm)			APMX (mm)	Applicable inserts	Screw	Wrench
			DC	LH	LF				
CHM190-063JT5004-SP12	4	△	63	165	266.75	104	SP□□12 AP□□15	M50130	HAT20IP
CHM190-063JT50L04-SP12	4	△	63	195	296.75	134			
CHM190-080JT5004-SP12	4	△	80	165	266.75	104			
CHM190-080JT50L04-SP12	4	△	80	205	306.75	144			
CHM190-063BT5004-SP12	4	△	63	165	266.75	104			
CHM190-063BT50L04-SP12	4	△	63	195	296.75	134			
CHM190-080BT5004-SP12	4	△	80	165	266.75	104			
CHM190-080BT50L04-SP12	4	△	80	205	306.75	144			


▲Standing inventory △Make-to-order

A General turning
 Turing of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Turing of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Applicable inserts

SP □ □
AP □ □

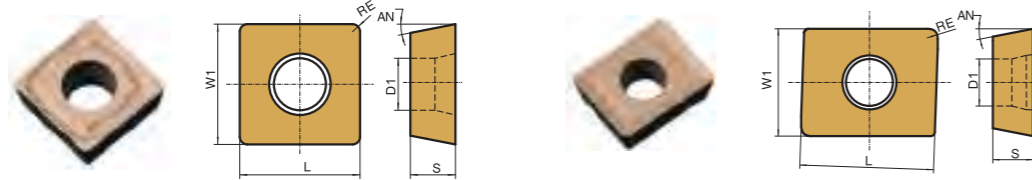

Working condition: ● Stable ● Average □ Tough

Applicable inserts	Workpiece material	Working condition																
		● Stable ● Average □ Tough																
		P	M	K	N	S	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10
Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-ferrous metal	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat resistant super alloys Titanium alloy	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Type	Dimension (mm)					AN	Material													
	L	W1	S	D1	RE		CVD	PVD										Cemented carbide	Cermet	
SPMT120408-MM	12.700	12.70	4.76	5.50	0.80	11°	★			☆	☆	★	★	☆						
APMT150412-MM	15.865	12.69	4.76	5.56	1.20	11°	★			☆	☆	★	★	☆						
SPHX120408T21	12.700	12.70	4.76	5.50	0.80	11°	★			☆	☆	★	★	☆						
APHX1504	15.875	12.70	4.76	5.70	0.40	11°	★			☆	☆	★	★	☆						

★ Recommended grade ☆ Available grade

Recommended cutting parameters

Workpiece material	Hardness (HB)	Insert grade	Cutting data	
			Cutting speed v_c (m/min)	Feed rate f_z (mm/z)
P	≤ 180	HR5110	130(60-150)	0.25(0.1-0.35)
		HR5120	140(70-170)	0.3(0.15-0.4)
		HR5130	140(70-170)	0.3(0.15-0.4)
	180-280	HR5110	120(60-150)	0.2(0.1-0.35)
		HR5120	130(60-170)	0.25(0.15-0.35)
		HR5130	140(70-170)	0.25(0.15-0.35)
280-350	HR5110	100(60-150)	0.15(0.08-0.25)	
	HR5120	110(70-170)	0.2(0.1-0.35)	
	HR5130	120(70-170)	0.2(0.1-0.35)	
M	≤ 270	HR5110	140(110-200)	0.2(0.1-0.3)
		HR5120	120(100-200)	0.2(0.1-0.3)
		HR5130	120(100-200)	0.2(0.1-0.3)
K	180-250	HR5110	170(90-200)	0.2(0.1-0.35)
		HR5120	130(90-200)	0.25(0.15-0.35)
		HR5130	130(100-210)	0.25(0.15-0.35)

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Code key of heavy milling inserts




① Insert shape						
						Others Z
C	F	G	L	S	X	

② Clearance angle major			
			Others O
N	Q	T	O

③ Tolerance class		
C: ± 0.013	E: ± 0.025	R: Blank

④ Clamping form					
					Others (Special requirements such as different clamping forms or hole diameter) X

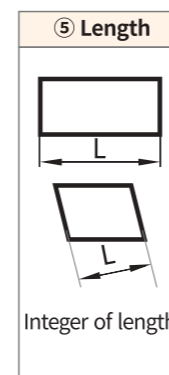

⑥ Width	⑦ Thickness	Corresponding sizes of the size codes of length, width and thickness												
		Code	03	03A	04	05	05A	05B	06	06A	06B	06C	06D	06E
		Size	3.80	3.97	4.76	5.00	5.95	5.80	6.35	6.00	6.94	6.84	6.55	6.70
Integer of width	Integer of thickness	Code	07	07A	07B	07C	07D	07E	07F	07G	08	08A	09	09A
		Size	7.94	7.05	7.15	7.24	7.35	7.60	7.50	7.82	8.50	8.00	9.52	
		Code	09B	10	11	11A	11B	11C	12	12A	12B	12C	13	13A
		Size	9.43	10.00	11.50	11.11	11.90	11.00	12.70	12.00	12.40	12.80	13.50	13.00
		Code	13B	13C	14	14A	14B	14C	15	15A	15B	15C	15D	15E
		Size	13.85	13.75	14.29	14.20	14.50	14.05	15.87	15.00	15.10	15.28	15.50	15.78
		Code	15F	15G	16	16A	16B	16C	17	17A	18	18A	18B	19
		Size	15.68	15.40	16.30	16.00	16.50	16.78	17.50	17.00	18.47	18.00	18.35	19.05
		Code	20	22	23	25	26	28						
		Size	20.00	22.80	23.99	25.00	26.50	28.57						

Notes: Coding principle: Add zero before Single-digit integer and take the two-digit integer as code; for sizes that differ in decimal bits, letters A, B, C, etc. are added to distinguish them.

⑧ Eigenvalue or code		

* "(L)" before the feature codes means that the eigenvalue is on the length side, "(S)" means that the eigenvalue is on the thickness side, and no letter means that the eigenvalue is on the width (W) side.
 * "(R)" after the feature code indicates the right knife, "(L)" indicates the left knife, and no letter indicates that there is no distinction between left and right.
 * Other feature codes may also be compiled according to other features of products.


Groove code


A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

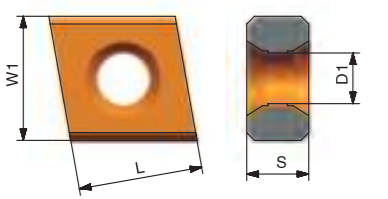



Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	CNEF121206-405	12.7	12.70	6.35	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	CNEF121206-408	12.7	12.70	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐
	CNEL161406-408	16.3	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Heavy milling inserts


Working condition: ● Stable ● Average ☐ Tough

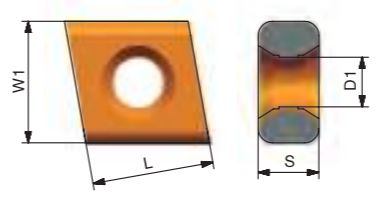


Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	CNEF161406-4R10	16.3	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐
	CNEF161406-4R15	16.3	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐
	CNEF161406-4R30	16.3	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade


Working condition: ● Stable ● Average ☐ Tough

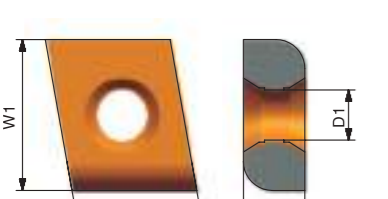


Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	CNEF161406-2R30	16.3	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐
	CNEF161406-2R50	16.3	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

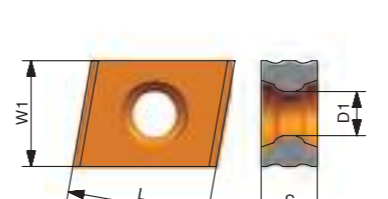

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	CNER16A12A06-L2M	16.00	12.00	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐
	CNEF161406-L2M	16.30	14.29	6.35	5.4	☆			●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

A General turning
 B Indexable milling
 C Short hole drill

A General turning
 B Indexable milling
 C Short hole drill

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	CQEH141406--R02R	14.29	14.29	6.35	5.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐
	CQER11A11A04-R01R	11.10	11.10	4.76	5.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	FQEW221406-R04R	22.8	14.29	6.35	5.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	FQES190906-2R30R	19.05	9.525	6.35	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐
	FQES190906-2R40R	19.05	9.525	6.35	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐
	FQES190906-2R45R	19.05	9.525	6.35	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐
	FQES190906-2R50R	19.05	9.525	6.35	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	FQEP120904-210L	12.70	9.525	4.76	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐
	FQEP120904-210R	12.70	9.525	4.76	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐
	FQEP120904-2R05L	12.70	9.525	4.76	4.4	☐	☐	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

A General turning
 B Indexable milling
 C Short hole drill

A General turning
 B Indexable milling
 C Short hole drill

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				CVD		PVD						Cemented carbide	Cermet				
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	FQES190906-4RXR	19.05	9.525	6.35	4.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				CVD		PVD						Cemented carbide	Cermet				
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	LNED150906-408	15.875	9.525	6.35	4.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-404	15.875	12.70	7.94	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151208B-408	15.875	12.70	7.82	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-400	15.875	12.70	7.94	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-408	15.875	12.70	7.94	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNEF191206-405	19.05	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNEL191207-400	19.05	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNEL191406-402	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-400	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-405	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-408	19.05	14.29	6.35	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-410	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
LNER191407A-406	19.05	14.29	7.05	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	

★ Recommended grade ☆ Available grade

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				CVD		PVD						Cemented carbide	Cermet				
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	LNER151207-DR100	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR115	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR130	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR145	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR160	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR190	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR200	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR250	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-DR400	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
LNER151207-DR800	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				CVD		PVD						Cemented carbide	Cermet				
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	LNER151207-NR100	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR130	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR140	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR150	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR190	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR200	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR800	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-NR3000	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				CVD		PVD						Cemented Carbide	Cermet				
		L	W1	S	D1	HR6130	HR8140	HR5110	HR6210	HR5120	HR6220	HR5130	HR630	HR7130	HR7140	HR7240	HRK10	HRC10	
	LNER151207-2NR100	15.875	12.70	7.94	5.4	☆													
	LNER151207-2NR130	15.875	12.70	7.94	5.4	☆													
	LNER151207-2NR140	15.875	12.70	7.94	5.4	☆													
	LNER151207-2NR190	15.875	12.70	7.94	5.4	☆													

★ Recommended grade ☆ Available grade

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

Insert shape	Type	Dimension (mm)				CVD		PVD						Cemented Carbide	Cermet				
		L	W1	S	D1	HR6130	HR8140	HR5110	HR6210	HR5120	HR6220	HR5130	HR630	HR7130	HR7140	HR7240	HRK10	HRC10	
	LNER151207-2R20	15.875	12.70	7.94	5.4	☆													
	LNER151207-2R30	15.875	12.70	7.94	5.4	☆													
	LNER151207-2R35	15.875	12.70	7.94	5.4	☆													
	LNER151207-2R40	15.875	12.70	7.94	5.4	☆													
	LNER151207-2R45	15.875	12.70	7.94	5.4	☆													
	LNER151207-2R50	15.875	12.70	7.94	5.4	☆													
	LNER151207A-2R50	15.875	12.70	7.05	5.4	☆													
	LNER151207-2R55	15.875	12.70	7.94	5.4	☆													
	LNER15C1207-2R50	15.28	12.70	7.94	5.4	☆													
	LNER15F1207-2R50	15.68	12.70	7.94	5.4	☆													
	LNER191406-2R30	19.05	14.29	6.35	5.4	☆													
	LNER191406-2R35	19.05	14.29	6.35	5.4	☆													
	LNER190906-2R50	19.05	9.525	6.35	5.4	☆													
	LNER191407-2R60	19.05	14.29	7.94	5.4	☆													
	LNER191406-2R30M22	19.05	14.29	6.35	5.4	☆													
	LNER191406-2R46M15	19.05	14.29	6.35	5.4	☆													
	LNER191407-2R60M15	19.05	14.29	7.94	5.4	☆													
	LNER191407-2R70M20	19.05	14.29	7.94	5.4	☆													
LNER191408-2R70M20	19.05	14.29	8.50	5.4	☆														


★ Recommended grade ☆ Available grade

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

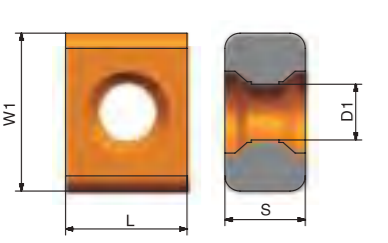


Insert shape	Type	Dimension (mm)				Working condition																	
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet						
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10									
	LNER151206-4R10	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206B-4R20	15.875	12.70	6.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-4R10	15.875	12.70	7.94	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-4R20	15.875	12.70	7.94	5.5	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-4R02	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-4R12	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-4R20	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER191406-4R24	19.05	14.29	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Heavy milling inserts


Working condition: ● Stable ● Average ☐ Tough

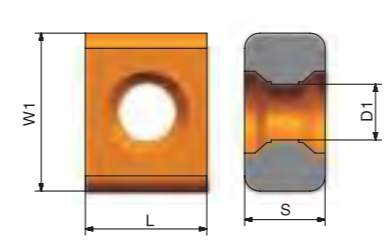

Insert shape	Type	Dimension (mm)				Working condition																	
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet						
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10									
	LNER150904-4R30H	15.875	9.525	4.76	4.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206-4R40H	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206-4R50H	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-4R40H	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-4R50H	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade


Working condition: ● Stable ● Average ☐ Tough

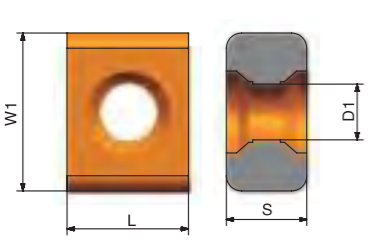

Insert shape	Type	Dimension (mm)				Working condition																	
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet						
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10									
	LNER151206-4R30	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206-4R40	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206-4R50	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206-4R55	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151206-4R65	15.875	12.70	6.35	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-4R40	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	LNER151207-4R50	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

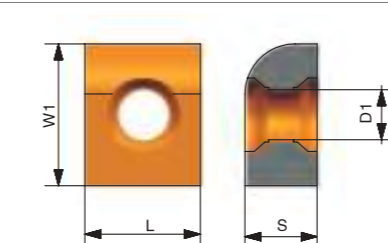

Insert shape	Type	Dimension (mm)				Working condition																	
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet						
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10									
	LNER151207-1R30M20	15.875	12.70	7.94	5.4	☐	☐	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐


★ Recommended grade ☆ Available grade

A General turning
 T Turning of small components
 P Parting and grooving
 Th Threading
 B Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 T Turning of small components
 P Parting and grooving
 Th Threading
 B Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Heavy milling inserts

Working condition: ● Stable ● Average ☒ Tough

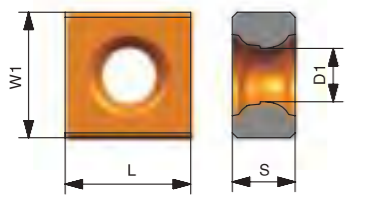


Insert shape	Type	Dimension (mm)				Working condition															
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet				
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10							
	SNED121206-408	12.70	12.70	6.35	5.5	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNEN151507-400	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNEN151507-408	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNER151507-405	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						

★ Recommended grade ☆ Available grade

Heavy milling inserts


Working condition: ● Stable ● Average ☒ Tough

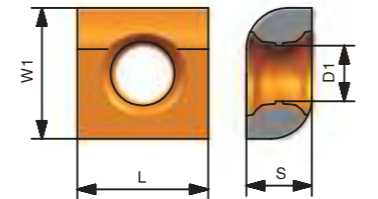

Insert shape	Type	Dimension (mm)				Working condition															
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet				
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10							
	SNEB151507-2R40	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNEH151507-2R20	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNEH151507-2R50	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						

★ Recommended grade ☆ Available grade


Working condition: ● Stable ● Average ☒ Tough

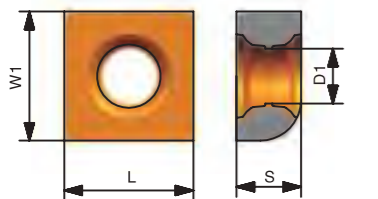

Insert shape	Type	Dimension (mm)				Working condition															
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet				
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10							
	SNER151507-1R70	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☒ Tough

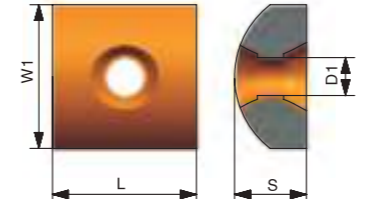

Insert shape	Type	Dimension (mm)				Working condition															
		L	W1	S	D1	CVD					PVD					Cemented carbide	Cermet				
		HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10							
	SNEX121206-DR400	12.70	12.70	6.35	4.4	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNEN151507-DR130	15.875	15.875	7.94	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						
	SNEN151507G-DR140	15.875	15.875	7.82	5.4	☒	☒	●	●	●	●	☒	☒	☒	☒						


★ Recommended grade ☆ Available grade

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Heavy milling inserts

Working condition: ● Stable ● Average ☐ Tough

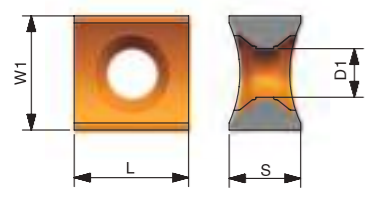


Insert shape	Type	Dimension (mm)				Working condition																	
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10					
	SNER121207-2NR80	12.70	12.70	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐				
						☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐	☐	☐	☐	
						☐	☐	●	●	●	●	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
						☐	☐	●	●	●	●	●	●	●	●	●	●	●	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Heavy milling inserts


Working condition: ● Stable ● Average ☐ Tough

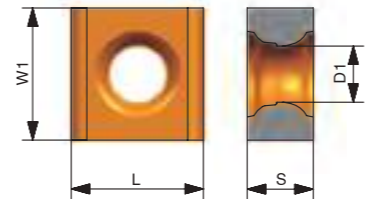

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	SNED121206-4R20	12.70	12.70	6.35	5.5	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEH151507-4R20	15.875	15.875	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNER121206-4R25	12.70	12.70	6.35	4.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEY090904-4R30H	9.525	9.525	4.76	4.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade


Working condition: ● Stable ● Average ☐ Tough

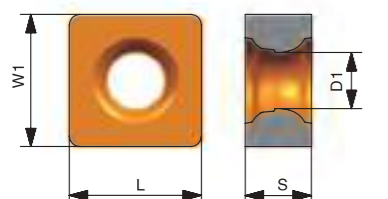

Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	SNED121206-S4R02	12.70	12.70	6.35	5.5	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNED121206-S4R08	12.70	12.70	6.35	5.5	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEY090904-S4R04	9.525	9.525	4.76	4.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

Working condition: ● Stable ● Average ☐ Tough

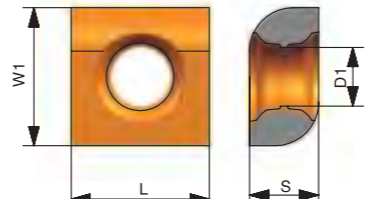


Insert shape	Type	Dimension (mm)				Working condition													
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140	HR7240	HRK10	HRC10	
	SNEN151507-2R20	15.875	15.875	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEN151507-2R30	15.875	15.875	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEN151507-2R40	15.875	15.875	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEN151507-2R50	15.875	15.875	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐
	SNEN151507-2R60	15.875	15.875	7.94	5.4	☐	☐	●	●	●	●	●	●	☐	☐	☐	☐	☐	☐

★ Recommended grade ☆ Available grade

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Heavy milling inserts



Workpiece material

P Steel	✖ ✖ ● ● ◐ ◐ ✖ ✖ ✖ ✖
M Stainless steel	● ● ◐ ◐ ✖ ◐ ✖ ✖ ✖ ✖
K Cast iron	✖ ✖ ● ● ◐ ◐ ✖ ✖ ✖ ✖
N Non-ferrous metal	◐ ◐ ◐ ◐ ✖ ✖ ✖ ✖ ✖ ✖
S Heat resistant super alloys Titanium alloy	●

Working condition: ● Stable ◐ Average ✖ Tough

Insert shape	Type	Dimension (mm)				CVD / PVD										Cemented carbide	Cermet		
		L	W1	S	D1	HR6130	HR8140	HR5110	HR5210	HR5120	HR5220	HR5130	HR530	HR7130	HR7140			HR7240	HRK10
	ZNER12A1106-L2R15	12.00	11.50	6.35	4.4		☆							★					
	ZNER12B11C06-2R30	12.40	11.00	6.35	4.4		☆							★					
	ZNER13C11C06-2R30	13.75	11.00	6.35	4.4		☆							★					
	ZNER14A1206-2R25	14.20	12.70	6.35	4.4		☆							★					
	ZNER191408-2R50	19.05	14.29	8.50	5.4		☆							★					
	ZNEB151207B-2R40	15.875	12.70	7.14	5.4		☆							★					
	ZNEN151207-2R45	15.875	12.70	7.94	5.4		☆							★					
	ZNEN151208B-2R45	15.875	12.70	8.14	5.4		☆							★					
	ZNEN16A1408-2R50	16.00	14.00	8.50	5.4		☆							★					
	ZNEN16A1408-2R55	16.00	14.00	8.50	5.4		☆							★					
ZNEJ151206-2R35	15.875	12.70	6.35	4.4		☆							★						

★ Recommended grade ☆ Available grade

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B81

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

B82

Selection guidance of solid carbide end mills

B Milling

Solid carbide end mills

- ◆ Selection guidance of solid carbide end mills ----- B-83
- ◆ Code key of solid carbide end mills ----- B-85
- ◆ Overview of solid carbide end mills ----- B-86
- ◆ Details and recommended parameters of solid carbide end mills ----- B-88
 - Series M - Micro end mills ----- B-88
 - Series B - basic end mills ----- B-100
 - Series P - high performance end mills ----- B-146
 - Series X - special end mills ----- B-188
- ◆ Non-standard customization of solid carbide end mills ----- B-196



Product type: **Series B - basic end mills**
 Machining form: **Two-flute flat end mill (short flute structure)**
 Product specification drawing: **B2L...LG**

Product outline drawing: Side machining, Bottom machining, Slot milling

Technical specifications: B Series, 30° helical angle, DC ≤ 12 0, -0.02; DC > 12 0, -0.03, 45° chamfer.

Type	Basic dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZFP		
B2L0300LG-4	3.0	4	12	75	2	Figure 1	●
B2L0400LG-4	4.0	4	15	75	2	Figure 2	○
B2L0300LG	3.0	6	12	75	2	Figure 1	○
B2L0400LG	4.0	6	15	75	2	Figure 1	●
B2L0500LG	5.0	6	20	75	2	Figure 1	●
B2L0600LG	6.0	6	20	75	2	Figure 2	●
B2L0800LG	8.0	8	25	100	2	Figure 2	●
B2L1000LG	10.0	10	30	100	2	Figure 2	●
B2L1200LG	12.0	12	35	100	2	Figure 2	●
B2L1400LG	14.0	14	40	100	2	Figure 2	●
B2L1600LG	16.0	16	50	150	2	Figure 2	●
B2L2000LG	20.0	20	55	150	2	Figure 2	●

● Running stock ○ Make-to-order

Product specification: Helical angle, insert diameter tolerance, etc.

P	M	K	N	S	H						
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

Range of workpiece materials

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Code key of solid carbide end mills

B **4** **S** **1000** **R0500** **B** **L** **G** - **4**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Product series

M	Micro mills
B	Basic type
P	High performance type
X	Special type

② Number of edges

2	Two flutes
3	Three flutes
4	Four flutes
...	

③ Length

S	Short
L	Long
E	Extra long
P	Necking

④ Tool diameter

10 00	φ10mm
Default	Ball nose mill

⑤ Corner radius

R05 00	R5.0mm
Default	Flat end mill

⑥ Tool type

default	Flat end
	Radius
B	Ball nose
W	Corrugated edge

⑦ Helical angle

L	Little helical angle
N	Normal helical angle
H	Large helical angle
O	Special helical angle

⑧ Application fields

G	General
M	Stainless steel machining
N	Aluminum alloy machining
S	High-temp alloy and titanium alloy machining
H	High hardness material machining

⑨ Shank diameter

4	shank diameter 4mm
---	--------------------

Overview of solid carbide end mills

Lineup	Shape	Number of Tooth	Model	Size range	Workpiece											page				
					P			M	K	N		S			H					
					Carbon steel	Alloy steel	High-alloyed steel and tool steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	< 54HRC	54-60 HRC		> 60HRC			
Micro mills	flat end	2	M2S...LG	φ 0.3—φ 3	☼	☼	☼	☼	☼	☼								B106		
			M2S...LH	φ 0.3—φ 3	☼	☼	☼	☼	☼										B108	
	Ball nose	2	M2S...BLG	φ 0.3—φ 3	☼	☼	☼	☼	☼										B110	
			M2S...BLH	φ 0.3—φ 3	☼	☼	☼	☼	☼										B112	
	Aluminum alloy mill	2	M2S...LN	φ 0.3—φ 3						☼	☼								B114	
			M2S...BLN	φ 0.3—φ 3						☼	☼								B116	
	Basic mill	Flat	2	B2S...LG	φ 3—φ 20	☼	☼	☼	☼	☼	☼			☼	☼	☼			B118	
				B2L...LG	φ 3—φ 20	☼	☼	☼	☼	☼					☼	☼	☼			B120
				B3S...NG	φ 3—φ 20	☼	☼	☼	☼	☼					☼	☼	☼			B122
				B3L...NG	φ 3—φ 20	☼	☼	☼	☼	☼					☼	☼	☼			B124
				B4S...LG	φ 1—φ 20	☼	☼	☼	☼	☼					☼	☼	☼			B126
				B4L...LG	φ 3—φ 20	☼	☼	☼	☼	☼					☼	☼	☼			B130
4			B4S...HG	φ 1—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼			B132	
			B4L...HG	φ 3—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼			B136	
			B6S...HG	φ 6—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼			B138	
			B6L...HG	φ 6—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼			B140	
			B2S...R...LG	φ 3—φ 12	☼	☼	☼	☼	☼	☼				☼	☼	☼			B142	
			B4S...R...LG	φ 3—φ 12	☼	☼	☼	☼	☼	☼				☼	☼	☼			B144	
Ball nose		2	B2S...BLG	φ 1—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼	☼		B146	
			B2L...BLG	φ 2—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼	☼		B148	
		4	B4S...BLG	φ 3—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼	☼		B150	
			B4L...BLG	φ 3—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼	☼		B152	
			2	B2S...HN	φ 3—φ 20							☼	☼							B154
				B2L...HN	φ 3—φ 20							☼	☼							B156
3	B3S...HN	φ 3—φ 20							☼	☼							B158			
	B3L...HN	φ 3—φ 20							☼	☼							B160			
High performance mill	Flat	4	P4S...LG	φ 1—φ 20	☼	☼	☼	☼	☼				☼	☼	☼			B164		
			P4P...LG	φ 6—φ 20	☼	☼	☼	☼	☼					☼	☼	☼			B166	
			P4S...NG	φ 1—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼			B168	
			P4P...NG	φ 6—φ 20	☼	☼	☼	☼	☼	☼				☼	☼	☼			B170	
			P4S...NS	φ 1—φ 20	☼	☼	☼	☼	☼					☼	☼				B172	
			P4P...NS	φ 6—φ 20	☼	☼	☼	☼	☼					☼	☼				B174	
		4	P4S...HH	φ 1—φ 20	☼	☼	☼	☼												B176
			P4P...HH	φ 6—φ 20	☼	☼	☼													B178

☼ Fit well ☼ Applicable

A General turning
 B Turing of small components
 C Parting and grooving
 D Threading
 E Indexable milling
 F Solid carbide end mill
 G Short hole drill
 H Solid carbide drill

A General turning
 B Turing of small components
 C Parting and grooving
 D Threading
 E Indexable milling
 F Solid carbide end mill
 G Short hole drill
 H Solid carbide drill

Overview of solid carbide end mills



Lineup	Shape	Number of Tooth	Model	Size range	Workpiece											page			
					P			M	K	N		S		H					
					Carbon steel	Alloy steel	High-alloyed steel and tool steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	Hardened steel					
									< 54HRC	54-60 HRC	> 60HRC								
High performance mill	Radius	4	P4S...R...LG	Φ3—Φ20	☀	☀	☀	☀	☀				☀	☀				B180	
			P4P...R...LG	Φ6—Φ20	☀	☀	☀	☀	☀					☀	☀				B182
			P4S...R...NG	Φ3—Φ20	☀	☀	☀	☀	☀					☀	☀				B184
			P4P...R...NG	Φ6—Φ20	☀	☀	☀	☀	☀					☀	☀				B186
			P4S...R...NS	Φ3—Φ20	☀	☀	☀	☀	☀					☀	☀				B188
			P4P...R...NS	Φ6—Φ20	☀	☀	☀	☀	☀					☀	☀				B190
			P4S...R...HH	Φ3—Φ20	☀	☀	☀		☀					☀	☀	☀			B192
	P4P...R...HH	Φ6—Φ20	☀	☀	☀		☀					☀	☀	☀			B194		
	Ball nose	2	P2S...BLG	Φ1—Φ20	☀	☀	☀	☀	☀				☀					B196	
			P2S...BLH	Φ1—Φ20	☀	☀	☀	☀	☀			☀	☀	☀	☀	☀		B198	
P2P...BLG			Φ1—Φ20	☀	☀	☀	☀	☀			☀	☀	☀	☀			B200		
P2P...BLH			Φ1—Φ20	☀	☀	☀		☀			☀	☀	☀	☀			B202		
Special type	Flat	4	P4S...BNS	Φ3—Φ20	☀	☀	☀	☀				☀	☀				B204		
			X3S...WLN	Φ6—Φ20						☀								B206	
			X4S...WNG	Φ6—Φ20	☀	☀	☀	☀	☀				☀	☀				B208	
Special type	Radius	4	X4S...HG	Φ4—Φ20	☀	☀	☀	☀	☀			☀	☀	☀	☀		B210		
			X4S...R...HG	Φ6—Φ20	☀	☀	☀	☀	☀				☀	☀	☀	☀		B212	

☀ Fit well ☀ Applicable

Series M - - Micro end mill

Two-flute flat end mill (General machining)

M2S...LG

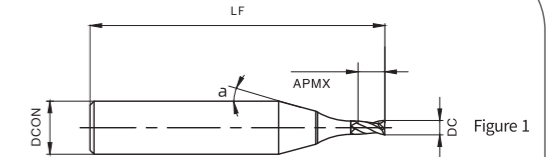

Type	Dimension (mm)				a (°)	ZEFP	Pattern	Inventory
	DC	DCON	APMX	LF				
M2S0030LG	0.3	4	0.6	50	15	2	Figure 1	○
M2S0040LG	0.4	4	0.8	50	15	2	Figure 1	○
M2S0050LG	0.5	4	1.0	50	15	2	Figure 1	○
M2S0060LG	0.6	4	1.2	50	15	2	Figure 1	○
M2S0070LG	0.7	4	1.4	50	15	2	Figure 1	○
M2S0080LG	0.8	4	1.6	50	15	2	Figure 1	○
M2S0090LG	0.9	4	1.8	50	15	2	Figure 1	○
M2S0100LG	1.0	4	2.0	50	15	2	Figure 1	○
M2S0110LG	1.1	4	2.2	50	30	2	Figure 1	○
M2S0120LG	1.2	4	2.4	50	30	2	Figure 1	○
M2S0130LG	1.3	4	2.6	50	30	2	Figure 1	○
M2S0140LG	1.4	4	2.8	50	30	2	Figure 1	○
M2S0150LG	1.5	4	3.0	50	30	2	Figure 1	○
M2S0160LG	1.6	4	3.2	50	30	2	Figure 1	○
M2S0170LG	1.7	4	3.4	50	30	2	Figure 1	○
M2S0180LG	1.8	4	3.6	50	30	2	Figure 1	○
M2S0190LG	1.9	4	3.8	50	30	2	Figure 1	○
M2S0200LG	2.0	4	4.0	50	30	2	Figure 1	○
M2S0210LG	2.1	4	4.2	50	30	2	Figure 1	○
M2S0220LG	2.2	4	4.4	50	30	2	Figure 1	○
M2S0230LG	2.3	4	4.6	50	30	2	Figure 1	○
M2S0240LG	2.4	4	4.8	50	30	2	Figure 1	○
M2S0250LG	2.5	4	5.0	50	10	2	Figure 1	○
M2S0260LG	2.6	4	5.2	50	10	2	Figure 1	○
M2S0270LG	2.7	4	5.4	50	10	2	Figure 1	○
M2S0280LG	2.8	4	5.6	50	10	2	Figure 1	○
M2S0290LG	2.9	4	5.8	50	10	2	Figure 1	○
M2S0300LG	3.0	4	6.0	50	10	2	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—M2S...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	40	60	80
	Alloy steel	< 1200	< 350	30	50	70
	High-alloyed steel and tool steel	< 1400	< 380	30	50	70
M	Austenite and ferrite stainless steel	< 680	<220	30	45	60
	Martensite stainless steel	< 820	< 240	25	40	50
K	Gray cast iron	–	< 280	40	70	100
	Nodular iron	–	< 320	30	60	90
N	Non-ferrous alloy	< 250	< 110	–	–	–
	Aluminum alloy	< 530	< 130	–	–	–
S	Heat resistant super alloys	< 3300	< 350	–	–	–
	Titanium alloy	<2100	< 400	–	–	–
H	Hardened steel	–	< 54HRC	30	60	90
	Hardened steel	–	54–60HRC	20	40	60
	Hardened steel	–	> 60 HRC	–	–	–



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap	ae	f _z (mm/r)	ap	ae	f _z (mm/r)
Diameter (mm)	ap	ae	f _z (mm/r)	ap	ae	f _z (mm/r)
0.3 ≤ Dc < 1	–	–	–	0.05Dc	1Dc	0.002–0.008
1 ≤ Dc ≤ 3	–	–	–	0.15Dc	1Dc	0.006–0.03

- (1) This series of tools is a good solution for slot milling;
- (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.
- (3) Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (5) The tool overhang is as short as possible without affecting the use.

Series M - - Micro end mill

Two-flute flat end mill (high hardness machining)

M2S...LH

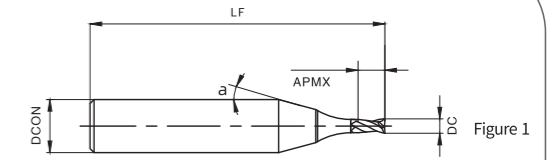

Type	Dimension (mm)				a (°)	ZEFP	Pattern	Inventory
	DC	DCON	APMX	LF				
M2S0030LH	0.3	4	0.6	50	15	2	Figure 1	○
M2S0040LH	0.4	4	0.8	50	15	2	Figure 1	○
M2S0050LH	0.5	4	1.0	50	15	2	Figure 1	○
M2S0060LH	0.6	4	1.2	50	15	2	Figure 1	○
M2S0070LH	0.7	4	1.4	50	15	2	Figure 1	○
M2S0080LH	0.8	4	1.6	50	15	2	Figure 1	○
M2S0090LH	0.9	4	1.8	50	15	2	Figure 1	○
M2S0100LH	1.0	4	2.0	50	15	2	Figure 1	○
M2S0110LH	1.1	4	2.2	50	30	2	Figure 1	○
M2S0120LH	1.2	4	2.4	50	30	2	Figure 1	○
M2S0130LH	1.3	4	2.6	50	30	2	Figure 1	○
M2S0140LH	1.4	4	2.8	50	30	2	Figure 1	○
M2S0150LH	1.5	4	3.0	50	30	2	Figure 1	○
M2S0160LH	1.6	4	3.2	50	30	2	Figure 1	○
M2S0170LH	1.7	4	3.4	50	30	2	Figure 1	○
M2S0180LH	1.8	4	3.6	50	30	2	Figure 1	○
M2S0190LH	1.9	4	3.8	50	30	2	Figure 1	○
M2S0200LH	2.0	4	4.0	50	30	2	Figure 1	○
M2S0210LH	2.1	4	4.2	50	30	2	Figure 1	○
M2S0220LH	2.2	4	4.4	50	30	2	Figure 1	○
M2S0230LH	2.3	4	4.6	50	30	2	Figure 1	○
M2S0240LH	2.4	4	4.8	50	30	2	Figure 1	○
M2S0250LH	2.5	4	5.0	50	10	2	Figure 1	○
M2S0260LH	2.6	4	5.2	50	10	2	Figure 1	○
M2S0270LH	2.7	4	5.4	50	10	2	Figure 1	○
M2S0280LH	2.8	4	5.6	50	10	2	Figure 1	○
M2S0290LH	2.9	4	5.8	50	10	2	Figure 1	○
M2S0300LH	3.0	4	6.0	50	10	2	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
☼	☼	☼		☼					☼	☼	☼

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—M2S...LH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	< 220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	< 2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	40	70	100
	Hardened steel	-	54-60HRC	30	55	80
	Hardened steel	-	> 60 HRC	20	40	60



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap	ae	fz (mm/r)	ap	ae	fz (mm/r)
Diameter (mm)						
0.3 ≤ Dc < 1	-	-	-	0.01Dc	1Dc	0.0015-0.005
1 ≤ Dc ≤ 3	-	-	-	0.02Dc	1Dc	0.004-0.015

(1) The lower of cutting depth, the higher of feed and speed.
 (2) Once the machine rigidity is poor, and with abnormal sound or vibration when processing, decrease the cutting speed and feed as same ration.

Series M - - Micro end mill

Two-flute ball nose end mill (general machining)

M2S...BLG

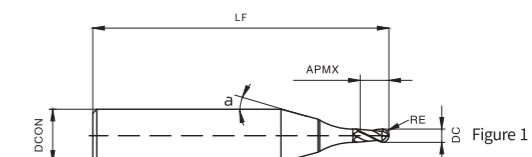

Type	Dimension (mm)					a (°)	ZEFP	Pattern	Inventory
	DC	DCON	APMX	LF	RE				
M2SR0015BLG	0.3	4	0.3	50	0.15	15	2	Figure 1	○
M2SR0020BLG	0.4	4	0.4	50	0.2	15	2	Figure 1	○
M2SR0025BLG	0.5	4	0.5	50	0.25	15	2	Figure 1	○
M2SR0030BLG	0.6	4	0.6	50	0.3	15	2	Figure 1	○
M2SR0035BLG	0.7	4	0.7	50	0.35	15	2	Figure 1	○
M2SR0040BLG	0.8	4	0.8	50	0.4	15	2	Figure 1	○
M2SR0045BLG	0.9	4	0.9	50	0.45	15	2	Figure 1	○
M2SR0050BLG	1.0	4	1.0	50	0.5	15	2	Figure 1	○
M2SR0060BLG	1.2	4	1.2	50	0.6	30	2	Figure 1	○
M2SR0070BLG	1.4	4	1.4	50	0.7	30	2	Figure 1	○
M2SR0075BLG	1.5	4	1.5	50	0.75	30	2	Figure 1	○
M2SR0080BLG	1.6	4	1.6	50	0.8	30	2	Figure 1	○
M2SR0090BLG	1.8	4	1.8	50	0.9	30	2	Figure 1	○
M2SR0100BLG	2.0	4	2.0	50	1.0	30	2	Figure 1	○
M2SR0125BLG	2.5	4	2.5	50	1.25	10	2	Figure 1	○
M2SR0150BLG	3.0	4	3.0	50	1.5	10	2	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

Recommended cutting conditions—M2S...BLG

Recommended Cutting Speed						
Workpiece material		Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)		
				Minimum	Recommendation	Maximum
P	Carbon steel	< 600	< 230	40	100	180
	Alloy steel	< 1200	< 350	30	90	160
	High-alloyed steel and tool steel	< 1400	< 380	30	80	120
M	Austenite and ferrite stainless steel	< 680	< 220	50	75	100
	Martensite stainless steel	< 820	< 240	40	60	80
K	Gray cast iron	-	< 280	50	110	180
	Nodular iron	-	< 320	40	90	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	< 2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	40	60	80
	Hardened steel	-	54-60HRC	20	40	60
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters						
Machining method	Profile milling					
Diameter (mm)	a_p	a_e	f_z			
$D_c < 1$	$0.025D_c$	$0.1D_c$	$0.015-0.025$			
$1 \leq D_c \leq 3$	$0.025D_c$	$0.1D_c$	$0.02-0.05$			

- (1) Air cooling or spray cooling is recommended.
- (2) Once the machine rigidity is poor, and with abnormal sound or vibration when processing. Decrease the cutting speed and feed as same ration.
- (3) Ensure the tool is as short as possible without interference.

Series M - - Micro end mill

Two-flute ball nose end mill (High hardness machining)

M2S...BLH



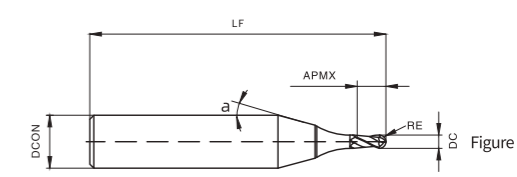





Figure 1



Profile milling



Cavity machining



slot machining

M Series

30°

$DC \leq 1, 0, -0.01$
 $1 < DC \leq 3, 0, -0.015$

$R \pm 0.005$

Type	Dimension (mm)					a (°)	ZEFP	Pattern	Inventory
	DC	DCON	APMX	LF	RE				
M2SR0015BLH	0.3	4	0.2	50	0.15	15	2	Figure 1	○
M2SR0020BLH	0.4	4	0.3	50	0.2	15	2	Figure 1	○
M2SR0025BLH	0.5	4	0.35	50	0.25	15	2	Figure 1	○
M2SR0030BLH	0.6	4	0.45	50	0.3	15	2	Figure 1	○
M2SR0035BLH	0.7	4	0.5	50	0.35	15	2	Figure 1	○
M2SR0040BLH	0.8	4	0.6	50	0.4	15	2	Figure 1	○
M2SR0045BLH	0.9	4	0.65	50	0.45	15	2	Figure 1	○
M2SR0050BLH	1.0	4	0.75	50	0.5	15	2	Figure 1	○
M2SR0060BLH	1.2	4	0.9	50	0.6	30	2	Figure 1	○
M2SR0070BLH	1.4	4	1.0	50	0.7	30	2	Figure 1	○
M2SR0075BLH	1.5	4	1.1	50	0.75	30	2	Figure 1	○
M2SR0080BLH	1.6	4	1.2	50	0.8	30	2	Figure 1	○
M2SR0090BLH	1.8	4	1.35	50	0.9	30	2	Figure 1	○
M2SR0100BLH	2.0	4	1.5	50	1.0	30	2	Figure 1	○
M2SR0125BLH	2.5	4	2.3	50	1.25	10	2	Figure 1	○
M2SR0150BLH	3.0	4	2.5	50	1.5	10	2	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙️	⚙️	⚙️		⚙️					⚙️	⚙️	⚙️

⚙️ Fit well ⚙️ Applicable

Recommended cutting conditions—M2S...BLH


Workpiece material		Strength (N/mm ²)		Hardness (HB/HRC)		Recommended Cutting Speed		
						Cutting speed (m/min)		
						Minimum	Recommendation	Maximum
P	Carbon steel	< 600	< 230	-	-	-		
	Alloy steel	< 1200	< 350	-	-	-		
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-		
M	Austenite and ferrite stainless steel	< 680	< 220	-	-	-		
	Martensite stainless steel	< 820	< 240	-	-	-		
K	Gray cast iron	-	< 280	-	-	-		
	Nodular iron	-	< 320	-	-	-		
N	Non-ferrous alloy	< 250	< 110	-	-	-		
	Aluminum alloy	< 530	< 130	-	-	-		
S	Heat resistant super alloys	< 3300	< 350	-	-	-		
	Titanium alloy	< 2100	< 400	-	-	-		
H	Hardened steel	-	< 54HRC	40	70	100		
	Hardened steel	-	54-60HRC	30	55	80		
	Hardened steel	-	> 60 HRC	20	40	60		

Recommended Cutting Parameters					
Machining method	Profile milling				
Diameter (mm)	ap	ae	fz		
Dc	0.05Dc	0.1Dc	0.004-0.03		

- Air cooling or spray cooling is recommended.
- Once the machine rigidity is poor, and with abnormal sound or vibration when processing. Decrease the cutting speed and feed as same ration.
- Ensure the tool is as short as possible without interference.

Series M - - Micro end mill

Two-flute flat end mill (aluminum alloy machining)

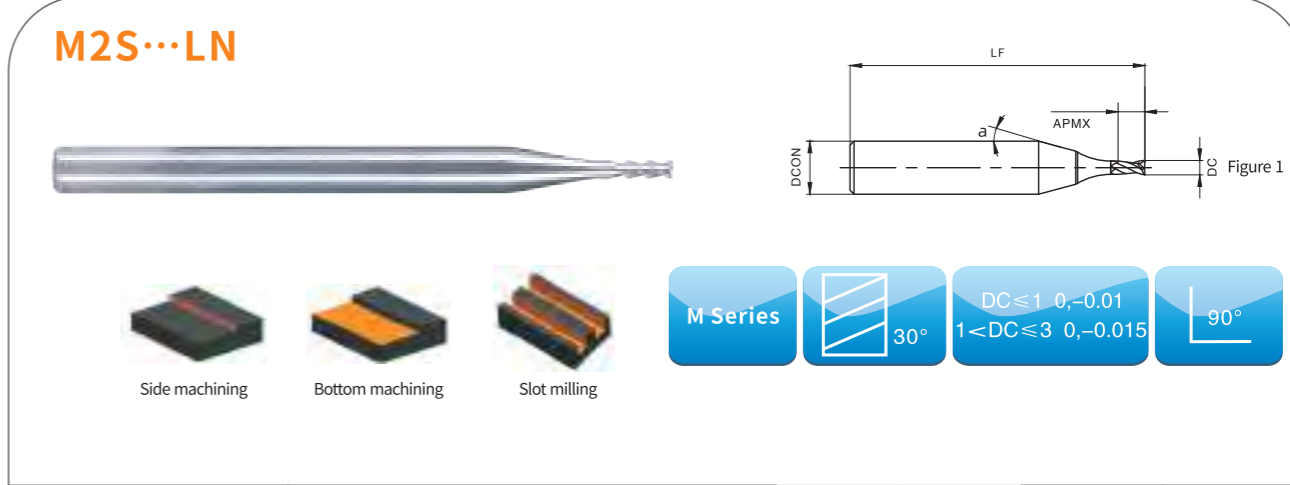

Type	Dimension (mm)				a (°)	ZEFP	Pattern	Inventory
	DC	DCON	APMX	LF				
M2S0030LN	0.3	4	0.6	50	15	2	Figure 1	○
M2S0040LN	0.4	4	0.8	50	15	2	Figure 1	○
M2S0050LN	0.5	4	1.0	50	15	2	Figure 1	○
M2S0060LN	0.6	4	1.2	50	15	2	Figure 1	○
M2S0070LN	0.7	4	1.4	50	15	2	Figure 1	○
M2S0080LN	0.8	4	1.6	50	15	2	Figure 1	○
M2S0090LN	0.9	4	1.8	50	15	2	Figure 1	○
M2S0100LN	1.0	4	2.0	50	15	2	Figure 1	○
M2S0110LN	1.1	4	2.2	50	30	2	Figure 1	○
M2S0120LN	1.2	4	2.4	50	30	2	Figure 1	○
M2S0130LN	1.3	4	2.6	50	30	2	Figure 1	○
M2S0140LN	1.4	4	2.8	50	30	2	Figure 1	○
M2S0150LN	1.5	4	3.0	50	30	2	Figure 1	○
M2S0160LN	1.6	4	3.2	50	30	2	Figure 1	○
M2S0170LN	1.7	4	3.4	50	30	2	Figure 1	○
M2S0180LN	1.8	4	3.6	50	30	2	Figure 1	○
M2S0190LN	1.9	4	3.8	50	30	2	Figure 1	○
M2S0200LN	2.0	4	4.0	50	30	2	Figure 1	○
M2S0210LN	2.1	4	4.2	50	30	2	Figure 1	○
M2S0220LN	2.2	4	4.4	50	30	2	Figure 1	○
M2S0230LN	2.3	4	4.6	50	30	2	Figure 1	○
M2S0240LN	2.4	4	4.8	50	30	2	Figure 1	○
M2S0250LN	2.5	4	5.0	50	10	2	Figure 1	○
M2S0260LN	2.6	4	5.2	50	10	2	Figure 1	○
M2S0270LN	2.7	4	5.4	50	10	2	Figure 1	○
M2S0280LN	2.8	4	5.6	50	10	2	Figure 1	○
M2S0290LN	2.9	4	5.8	50	10	2	Figure 1	○
M2S0300LN	3.0	4	6.0	50	10	2	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙	⚙					

⚙ Fit well ⚙ Applicable

Recommended cutting conditions—M2S...LN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	80	160	350
	Aluminum alloy	< 530	< 130	120	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap	ae	fz (mm/r)	ap	ae	fz (mm/r)
Dc < 1	-	-	-	0.03Dc	Dc	0.02-0.04
1 ≤ Dc ≤ 3	-	-	-	0.06Dc	Dc	0.04-0.12

(1) Water-soluble cutting fluid required.

Series M - - Micro end mill

Two-flute ball nose end mill (aluminum alloy machining)

M2S...BLN

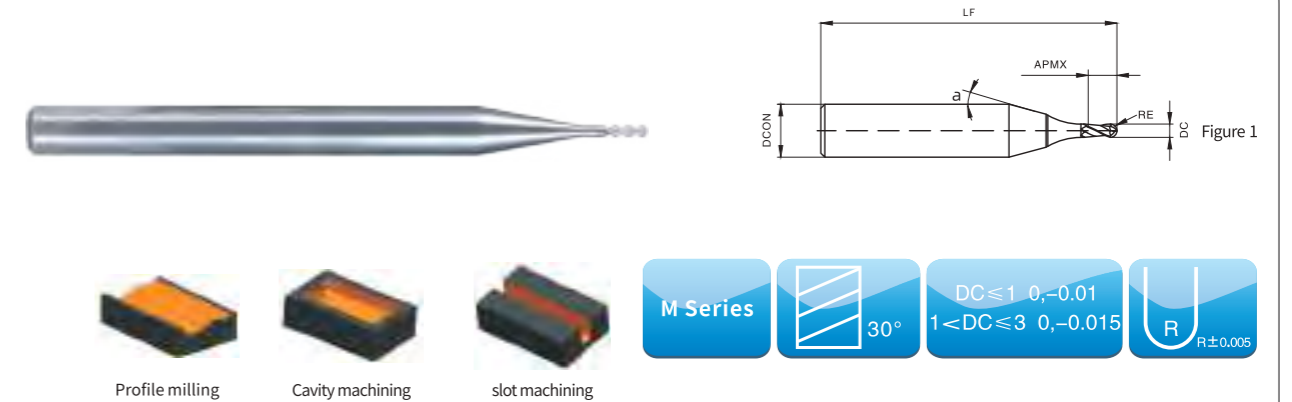

Type	Dimension (mm)					a (°)	ZEFP	Pattern	Inventory
	DC	DCON	APMX	LF	RE				
M2SR0015BLN	0.3	4	0.3	50	0.15	15	2	Figure 1	○
M2SR0020BLN	0.4	4	0.4	50	0.2	15	2	Figure 1	○
M2SR0025BLN	0.5	4	0.5	50	0.25	15	2	Figure 1	○
M2SR0030BLN	0.6	4	0.6	50	0.3	15	2	Figure 1	○
M2SR0035BLN	0.7	4	0.7	50	0.35	15	2	Figure 1	○
M2SR0040BLN	0.8	4	0.8	50	0.4	15	2	Figure 1	○
M2SR0045BLN	0.9	4	0.9	50	0.45	15	2	Figure 1	○
M2SR0050BLN	1.0	4	1.0	50	0.5	15	2	Figure 1	○
M2SR0060BLN	1.2	4	1.2	50	0.6	30	2	Figure 1	○
M2SR0070BLN	1.4	4	1.4	50	0.7	30	2	Figure 1	○
M2SR0075BLN	1.5	4	1.5	50	0.75	30	2	Figure 1	○
M2SR0080BLN	1.6	4	1.6	50	0.8	30	2	Figure 1	○
M2SR0090BLN	1.8	4	1.8	50	0.9	30	2	Figure 1	○
M2SR0100BLN	2.0	4	2.0	50	1.0	30	2	Figure 1	○
M2SR0125BLN	2.5	4	2.5	50	1.25	10	2	Figure 1	○
M2SR0150BLN	3.0	4	3.0	50	1.5	10	2	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙	⚙					

⚙ Fit well ⚙ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—M2S···BLN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	80	160	350
	Aluminum alloy	< 530	< 130	120	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Profile milling			Diameter (mm)	ap	ae
	Profile milling					
				Dc<1	0.01Dc	-
				1≤Dc≤3	0.02Dc	-

(1) Water-soluble cutting fluid required.

Series B--Basic end mills

Two-flute flat end mill (short flute structure)

B2S···LG

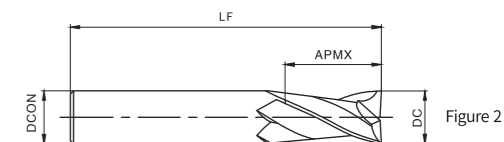

B Series

30°

DC ≤ 12 0, -0.02

DC > 12 0, -0.03

45°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B2S0300LG-4	3.0	4	8	50	2	Figure 1	●
B2S0350LG-4	3.5	4	10	50	2	Figure 1	○
B2S0400LG-4	4.0	4	11	50	2	Figure 1	●
B2S0300LG	3.0	6	8	50	2	Figure 1	○
B2S0350LG	3.5	6	10	50	2	Figure 1	●
B2S0400LG	4.0	6	11	50	2	Figure 1	○
B2S0450LG	4.5	6	11	50	2	Figure 1	●
B2S0500LG	5.0	6	13	50	2	Figure 1	●
B2S0550LG	5.5	6	16	50	2	Figure 1	●
B2S0600LG	6.0	6	16	50	2	Figure 1	○
B2S0700LG	7.0	8	20	60	2	Figure 1	●
B2S0800LG	8.0	8	20	60	2	Figure 1	●
B2S0900LG	9.0	10	22	75	2	Figure 1	●
B2S1000LG	10.0	10	25	75	2	Figure 1	●
B2S1200LG	12.0	12	30	75	2	Figure 1	●
B2S1400LG	14.0	14	32	75	2	Figure 1	●
B2S1600LG	16.0	16	45	100	2	Figure 1	●
B2S1800LG	18.0	18	45	100	2	Figure 1	●
B2S2000LG	20.0	20	45	100	2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Recommended cutting conditions—B2S...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	Diameter (mm)	ap (1xD _c)	ae (0.3xD _c)	fz (mm/z)	ap (0.75xD _c)	ae (1xD _c)
3.0	3.0	0.9	0.025	2.3	3.0	0.02
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.03
5.0	5.0	1.5	0.035	3.8	5.0	0.03
5.5	5.5	1.7	0.040	4.0	5.5	0.035
6.0	6.0	1.8	0.045	4.5	6.0	0.035
7.0	7.0	2.1	0.050	5.3	7.0	0.04
8.0	8.0	2.4	0.060	6.0	8.0	0.05
9.0	9.0	2.7	0.065	6.7	9.0	0.055
10.0	10.0	3.0	0.070	7.5	10.0	0.06
12.0	12.0	3.6	0.085	9.0	12.0	0.07
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.12

- (1) This series of tools is a good solution for slot milling;
- (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.
- (3) Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (5) The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Two-flute flat end mill (long flute structure)

B2L...LG

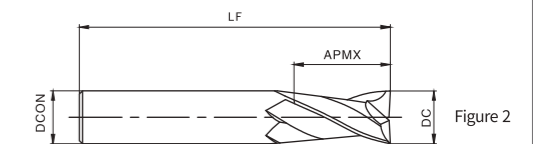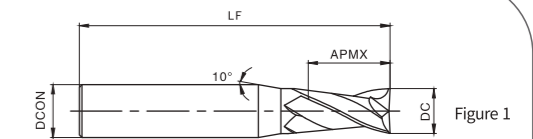

B Series

30°

DC ≤ 12 0, -0.02

DC > 12 0, -0.03

45°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B2L0300LG-4	3.0	4	12	75	2	Figure 1	●
B2L0400LG-4	4.0	4	15	75	2	Figure 2	○
B2L0300LG	3.0	6	12	75	2	Figure 1	○
B2L0400LG	4.0	6	15	75	2	Figure 1	●
B2L0500LG	5.0	6	20	75	2	Figure 1	●
B2L0600LG	6.0	6	20	75	2	Figure 2	●
B2L0800LG	8.0	8	25	100	2	Figure 2	●
B2L1000LG	10.0	10	30	100	2	Figure 2	●
B2L1200LG	12.0	12	35	100	2	Figure 2	●
B2L1400LG	14.0	14	40	100	2	Figure 2	●
B2L1600LG	16.0	16	50	150	2	Figure 2	●
B2L2000LG	20.0	20	55	150	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 General turning
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 General turning
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Recommended cutting conditions—B2L...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xD _c)	ae (0.3xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)	f _z (mm/z)
	3.0	3.0	0.9	0.025	2.3	3.0	0.020
	4.0	4.0	1.2	0.030	3.0	4.0	0.025
	5.0	5.0	1.5	0.035	3.8	5.0	0.030
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	14.0	14.0	4.2	0.100	10.5	14.0	0.085
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) This series of tools is a good solution for slot milling;
- (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.
- (3) Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (5) The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Three-flute flat end mill (short flute structure)

B3S...NG



B Series

38°

DC ≤ 12 0, -0.02

DC > 12 0, -0.03

45°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B3S0300NG-4	3.0	4	8	50	3	Figure 1	●
B3S0350NG-4	3.5	4	10	50	3	Figure 1	○
B3S0400NG-4	4.0	4	11	50	3	Figure 2	●
B3S0300NG	3.0	6	8	50	3	Figure 1	○
B3S0350NG	3.5	6	10	50	3	Figure 1	●
B3S0400NG	4.0	6	11	50	3	Figure 1	○
B3S0450NG	4.5	6	11	50	3	Figure 1	●
B3S0500NG	5.0	6	13	50	3	Figure 1	○
B3S0550NG	5.5	6	16	50	3	Figure 1	●
B3S0600NG	6.0	6	16	50	3	Figure 2	○
B3S0700NG	7.0	8	20	60	3	Figure 1	●
B3S0800NG	8.0	8	20	60	3	Figure 2	●
B3S0900NG	9.0	10	22	75	3	Figure 1	●
B3S1000NG	10.0	10	25	75	3	Figure 2	●
B3S1200NG	12.0	12	30	75	3	Figure 2	●
B3S1400NG	14.0	14	32	75	3	Figure 2	●
B3S1600NG	16.0	16	45	100	3	Figure 2	●
B3S1800NG	18.0	18	45	100	3	Figure 2	●
B3S2000NG	20.0	20	45	100	3	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B3S...NG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
5.5	5.5	1.7	0.040	4.1	5.5	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- Water-soluble cutting fluid is recommended during machining stainless steel.
- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- The down milling is recommended for side milling.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table is lowered in the same proportion.

Series B--Basic end mills

Three-flute flat end mill (long flute structure)

B3L...NG

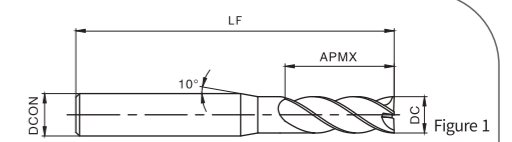

B Series

38°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

45°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B3L0300NG-4	3.0	4	12	75	3	Figure 1	●
B3L0400NG-4	4.0	4	15	75	3	Figure 2	●
B3L0300NG	3.0	6	12	75	3	Figure 1	○
B3L0400NG	4.0	6	15	75	3	Figure 1	●
B3L0500NG	5.0	6	20	75	3	Figure 1	●
B3L0600NG	6.0	6	20	75	3	Figure 2	●
B3L0800NG	8.0	8	25	100	3	Figure 2	●
B3L1000NG	10.0	10	30	100	3	Figure 2	○
B3L1200NG	12.0	12	35	100	3	Figure 2	●
B3L1400NG	14.0	14	40	100	3	Figure 2	●
B3L1600NG	16.0	16	50	150	3	Figure 2	●
B3L2000NG	20.0	20	55	150	3	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

Recommended cutting conditions—B3L...NG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	3.0	3.0	0.9	0.025	2.3	3.0	0.020
	4.0	4.0	1.2	0.030	3.0	4.0	0.025
	5.0	5.0	1.5	0.035	3.8	5.0	0.030
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	14.0	14.0	4.2	0.100	10.5	14.0	0.085
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- (4) The down milling is recommended for side milling.
- (5) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table is lowered in the same proportion.

Series B--Basic end mills

Four-flute flat end mill (short flute structure, small helical angle)

B4S...LG

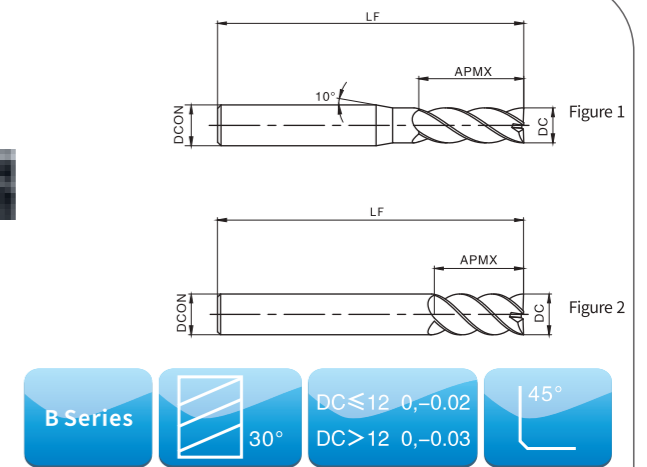

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B4S0100LG-4	1.0	4	3	50	4	Figure 1	●
B4S0150LG-4	1.5	4	4	50	4	Figure 1	○
B4S0200LG-4	2.0	4	6	50	4	Figure 1	●
B4S0250LG-4	2.5	4	8	50	4	Figure 1	●
B4S0300LG-4	3.0	4	8	50	4	Figure 1	●
B4S0350LG-4	3.5	4	10	50	4	Figure 1	●
B4S0400LG-4	4.0	4	11	50	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Solid carbide drill

Recommended cutting conditions—B4S...LG

Recommended Cutting Speed						
Workpiece material		Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)		
				Minimum	Recommendation	Maximum
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)
1.0	1.0	0.3	0.010	0.75	1.0	0.005
1.5	1.5	0.5	0.015	1.13	1.5	0.010
2.0	2.0	0.6	0.015	1.50	2.0	0.015
2.5	2.5	0.8	0.020	1.88	2.5	0.020
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
5.5	5.5	1.7	0.040	4.1	5.5	0.035
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.080	8.0	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Four-flute flat end mill (short flute structure, small helical angle)

B4S...LG

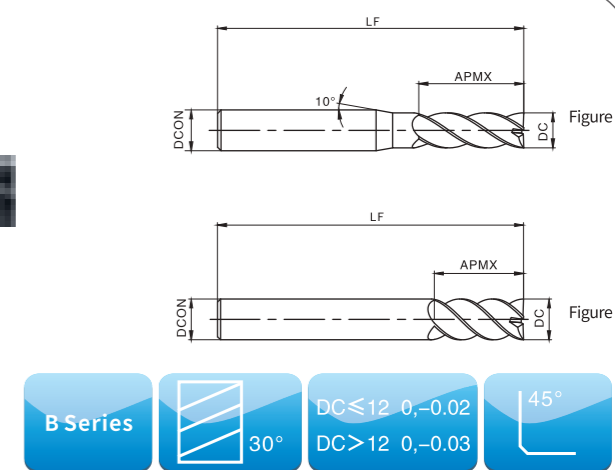

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B4S0100LG	1.0	6	3	50	4	Figure 1	●
B4S0150LG	1.5	6	4	50	4	Figure 1	○
B4S0200LG	2.0	6	6	50	4	Figure 1	●
B4S0250LG	2.5	6	8	50	4	Figure 1	○
B4S0300LG	3.0	6	8	50	4	Figure 1	●
B4S0350LG	3.5	6	10	50	4	Figure 1	○
B4S0400LG	4.0	6	11	50	4	Figure 1	●
B4S0450LG	4.5	6	11	50	4	Figure 1	○
B4S0500LG	5.0	6	13	50	4	Figure 1	●
B4S0550LG	5.5	6	16	50	4	Figure 1	○
B4S0600LG	6.0	6	16	50	4	Figure 2	●
B4S0700LG	7.0	8	20	60	4	Figure 2	○
B4S0800LG	8.0	8	20	60	4	Figure 2	●
B4S0900LG	9.0	10	22	75	4	Figure 2	○
B4S1000LG	10.0	10	25	75	4	Figure 2	●
B4S1100LG	11.0	12	26	75	4	Figure 2	●
B4S1200LG	12.0	12	30	75	4	Figure 2	●
B4S1400LG	14.0	14	32	75	4	Figure 2	●
B4S1600LG	16.0	16	45	100	4	Figure 2	●
B4S1800LG	18.0	18	45	100	4	Figure 2	●
B4S2000LG	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B4S...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	1.0	1.0	0.3	0.010	0.75	1.0	0.005
	1.5	1.5	0.5	0.015	1.13	1.5	0.010
	2.0	2.0	0.6	0.015	1.50	2.0	0.015
	2.5	2.5	0.8	0.020	1.88	2.5	0.020
	3.0	3.0	0.9	0.025	2.3	3.0	0.020
	3.5	3.5	1.1	0.025	2.6	3.5	0.025
	4.0	4.0	1.2	0.030	3.0	4.0	0.025

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Four-flute flat end mill (long flute structure, small helical angle)

B4L...LG

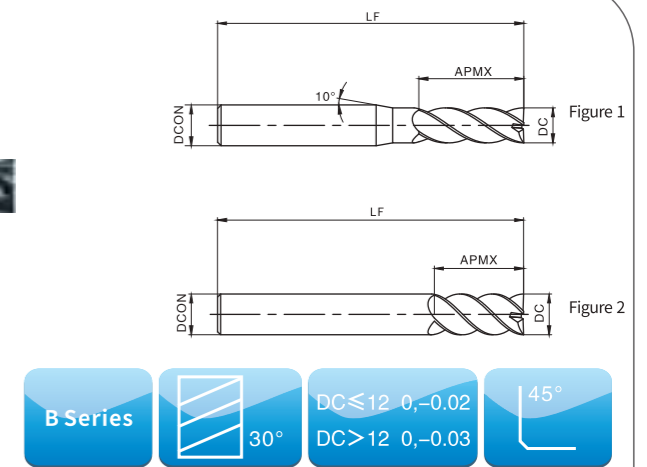

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B4L0300LG-4	3.0	4	12	75	4	Figure 1	●
B4L0400LG-4	4.0	4	15	75	4	Figure 2	○
B4L0300LG	3.0	6	12	75	4	Figure 1	●
B4L0400LG	4.0	6	15	75	4	Figure 1	●
B4L0500LG	5.0	6	20	75	4	Figure 1	●
B4L0600LG	6.0	6	20	75	4	Figure 2	●
B4L0800LG	8.0	8	25	100	4	Figure 2	●
B4L1000LG	10.0	10	30	100	4	Figure 2	○
B4L1200LG	12.0	12	35	100	4	Figure 2	●
B4L1400LG	14.0	14	40	100	4	Figure 2	●
B4L1600LG	16.0	16	50	150	4	Figure 2	●
B4L2000LG	20.0	20	55	150	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Recommended cutting conditions—B4L...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
3.0	3.0	0.9	0.025	2.3	3.0	0.020
4.0	4.0	1.2	0.030	3.0	4.0	0.025
5.0	5.0	1.5	0.035	3.8	5.0	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Four-flute flat end mill (short flute structure, large helical angle)

B4S...HG

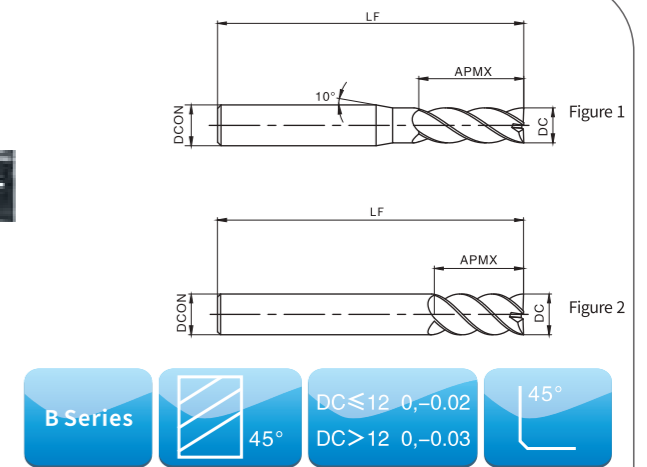

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B4S0100HG-4	1.0	4	3	50	4	Figure 1	●
B4S0150HG-4	1.5	4	4	50	4	Figure 1	●
B4S0200HG-4	2.0	4	6	50	4	Figure 1	●
B4S0250HG-4	2.5	4	8	50	4	Figure 1	●
B4S0300HG-4	3.0	4	8	50	4	Figure 1	●
B4S0350HG-4	3.5	4	10	50	4	Figure 1	●
B4S0400HG-4	4.0	4	11	50	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A General turning
 Tiring of small components
 Parting and grooving
 Threading
B Indexable milling
 Solid carbide end mill
C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
B Indexable milling
 Solid carbide end mill
C Short hole drill
 Solid carbide drill

Recommended cutting conditions—B4S···HG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M Austenite and ferrite stainless steel	< 680	< 220	80	110	140	
	Martensite stainless steel	< 820	< 240	60	90	120
K Gray cast iron	–	< 280	120	150	180	
	Nodular iron	–	< 320	90	110	130
N Non-ferrous alloy	< 250	< 110	–	–	–	
	Aluminum alloy	< 530	< 130	–	–	–
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	< 2100	< 400	60	70	80
H Hardened steel	–	< 54HRC	90	120	150	
	–	54–60HRC	–	–	–	
	–	> 60 HRC	–	–	–	


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
1.0	1.0	0.3	0.010	0.75	1.0	0.005
1.5	1.5	0.5	0.015	1.13	1.5	0.010
2.0	2.0	0.6	0.015	1.50	2.0	0.015
2.5	2.5	0.8	0.020	1.88	2.5	0.020
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Four-flute flat end mill (short flute structure, large helical angle)

B4S···HG

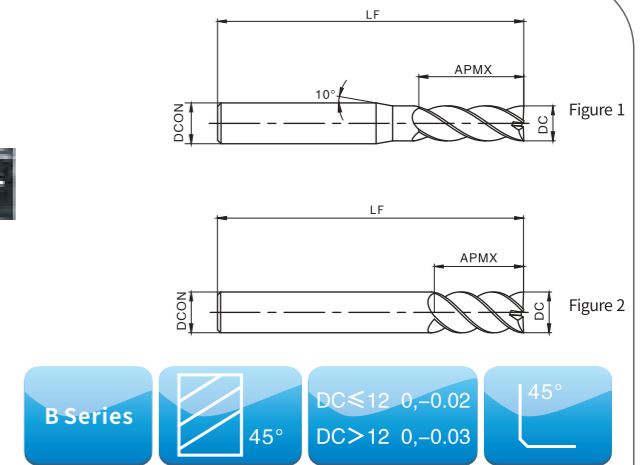

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B4S0100HG	1.0	6	3	50	4	Figure 1	●
B4S0150HG	1.5	6	4	50	4	Figure 1	○
B4S0200HG	2.0	6	6	50	4	Figure 1	●
B4S0250HG	2.5	6	8	50	4	Figure 1	○
B4S0300HG	3.0	6	8	50	4	Figure 1	●
B4S0350HG	3.5	6	10	50	4	Figure 1	○
B4S0400HG	4.0	6	11	50	4	Figure 1	●
B4S0450HG	4.5	6	11	50	4	Figure 1	○
B4S0500HG	5.0	6	13	50	4	Figure 1	●
B4S0550HG	5.5	6	16	50	4	Figure 1	○
B4S0600HG	6.0	6	16	50	4	Figure 2	●
B4S0700HG	7.0	8	20	60	4	Figure 1	●
B4S0800HG	8.0	8	20	60	4	Figure 2	●
B4S0900HG	9.0	10	22	75	4	Figure 1	●
B4S1000HG	10.0	10	25	75	4	Figure 2	●
B4S1100HG	11.0	12	26	75	4	Figure 1	●
B4S1200HG	12.0	12	30	75	4	Figure 2	●
B4S1400HG	14.0	14	32	75	4	Figure 2	●
B4S1600HG	16.0	16	45	100	4	Figure 2	●
B4S1800HG	18.0	18	45	100	4	Figure 2	●
B4S2000HG	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B4S...HG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)
1.0	1.0	0.3	0.010	0.75	1.0	0.005
1.5	1.5	0.5	0.015	1.13	1.5	0.010
2.0	2.0	0.6	0.015	1.50	2.0	0.015
2.5	2.5	0.8	0.020	1.88	2.5	0.020
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.080	8.0	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Four-flute flat end mill (long flute structure, large helical angle)

B4L...HG

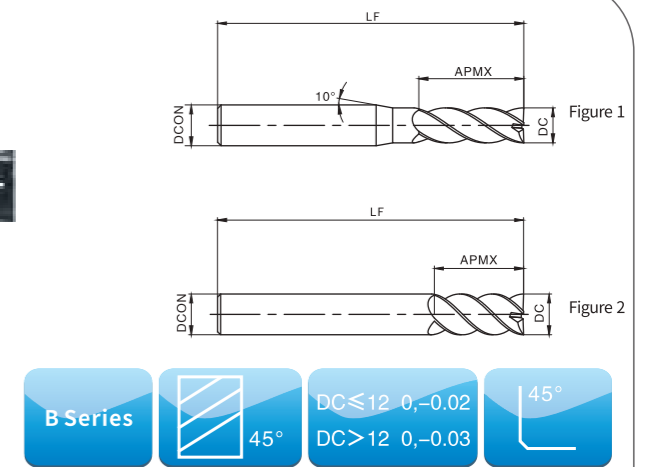

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B4L0300HG-4	3.0	4	12	75	4	Figure 1	●
B4L0400HG-4	4.0	4	15	75	4	Figure 2	●
B4L0300HG	3.0	6	12	75	4	Figure 1	●
B4L0400HG	4.0	6	15	75	4	Figure 1	●
B4L0500HG	5.0	6	20	75	4	Figure 1	●
B4L0600HG	6.0	6	20	75	4	Figure 2	●
B4L0800HG	8.0	8	25	100	4	Figure 2	●
B4L1000HG	10.0	10	30	100	4	Figure 2	●
B4L1200HG	12.0	12	35	100	4	Figure 2	●
B4L1400HG	14.0	14	40	100	4	Figure 2	●
B4L1600HG	16.0	16	50	150	4	Figure 2	●
B4L2000HG	20.0	20	55	150	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

Recommended cutting conditions—B4L...HG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xD _c)	ae (0.3xD _c)	fz (mm/z)	ap (0.75xD _c)	ae (1xD _c)	fz (mm/z)
	3.0	3.0	0.9	0.025	2.3	3.0	0.02
	4.0	4.0	1.2	0.030	3.0	4.0	0.025
	5.0	5.0	1.5	0.035	3.8	5.0	0.03
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.05
	10.0	10.0	3.0	0.070	7.5	10.0	0.06
	12.0	12.0	3.6	0.085	9.0	12.0	0.07
	14.0	14.0	4.2	0.100	10.5	14.0	0.085
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.12

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Six-flute flat end mill (short flute structure)

B6S...HG

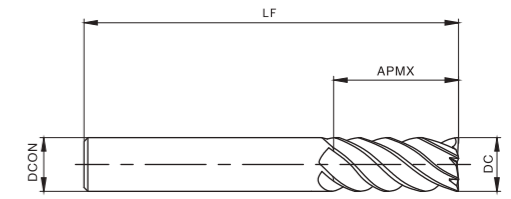

B Series $DC \leq 12 \quad 0, -0.02$ $DC > 12 \quad 0, -0.03$

Type	Dimension (mm)					Inventory
	DC	DCON	APMX	LF	ZEFP	
B6S0600HG	6.0	6	18	60	6	●
B6S0800HG	8.0	8	20	60	6	●
B6S1000HG	10.0	10	30	75	6	●
B6S1200HG	12.0	12	32	75	6	●
B6S1600HG	16.0	16	40	100	6	●
B6S2000HG	20.0	20	45	100	6	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A General turning
 Tiring of small components
 Parting and grooving
 Threading
B Indexable milling
 Solid carbide end mill
C Short hole drill
 Solid carbide drill

A General turning
 Tiring of small components
 Parting and grooving
 Threading
B Indexable milling
 Solid carbide end mill
C Short hole drill
 Solid carbide drill

Recommended cutting conditions—B6S···HG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	< 220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	—	< 280	120	150	180	
	Nodular iron	—	90	110	130	
N Non-ferrous alloy	< 250	< 110	—	—	—	
	Aluminum alloy	< 530	—	—	—	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	< 2100	60	70	80	
H Hardened steel	—	< 54HRC	90	120	150	
	—	54–60HRC	—	—	—	
	—	> 60 HRC	—	—	—	


Recommended Cutting Parameters						
Machining method	Side milling					
Diameter (mm)	ap (1xDc)	ae (0.05xDc)	fz (mm/z)			
6.0	6.0	0.3	0.020			
8.0	8.0	0.4	0.027			
10.0	10.0	0.5	0.033			
12.0	12.0	0.6	0.040			
16.0	16.0	0.8	0.053			
20.0	20.0	1.0	0.067			

- (1) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (2) The down milling is recommended for side milling.
- (3) Use cutting fluid that is air-cooled or free of producing smoke.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series B--Basic end mills

Six-flute flat end mill (long flute structure)

B6L···HG

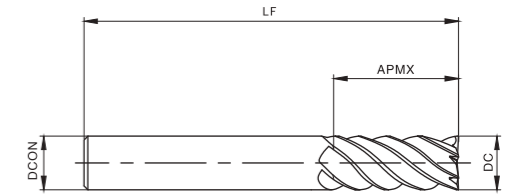

Side machining



Bottom machining



Slot milling

B Series $DC \leq 12 \quad 0, -0.02$ $DC > 12 \quad 0, -0.03$

Type	Dimension (mm)					Inventory
	DC	DCON	APMX	LF	ZEFP	
B6L0600HG	6.0	6	24	75	6	●
B6L0800HG	8.0	8	32	75	6	●
B6L1000HG	10.0	10	40	100	6	●
B6L1200HG	12.0	12	45	100	6	●
B6L1600HG	16.0	16	64	150	6	●
B6L2000HG	20.0	20	75	150	6	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Recommended cutting conditions—B6L...HG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (1xDc)	ae (0.05xDc)	fz (mm/z)	
6.0	6.0	0.3	0.025	
8.0	8.0	0.4	0.033	
10.0	10.0	0.5	0.042	
12.0	12.0	0.6	0.050	
16.0	16.0	0.8	0.067	
20.0	20.0	1.0	0.083	

- Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the Feed rate (feed rate) to 40%-60%.
- Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Two-flute R end mill (short flute structure)

B2S...R...LG

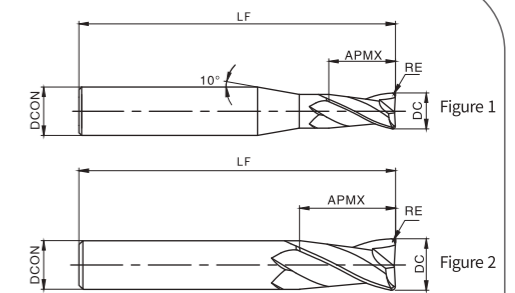

B Series

30°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

r ±0.01

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B2S0300R0020LG-4	3.0	4	8	50	0.2	2	Figure 1	●
B2S0300R0030LG-4	3.0	4	8	50	0.3	2	Figure 1	●
B2S0300R0050LG-4	3.0	4	8	50	0.5	2	Figure 1	●
B2S0400R0020LG-4	4.0	4	11	50	0.2	2	Figure 2	●
B2S0400R0030LG-4	4.0	4	11	50	0.3	2	Figure 2	●
B2S0400R0050LG-4	4.0	4	11	50	0.5	2	Figure 2	●
B2S0400R0100LG-4	4.0	4	11	50	1.0	2	Figure 2	●
B2S0300R0020LG	3.0	6	8	50	0.2	2	Figure 1	●
B2S0300R0030LG	3.0	6	8	50	0.3	2	Figure 1	○
B2S0300R0050LG	3.0	6	8	50	0.5	2	Figure 1	●
B2S0400R0020LG	4.0	6	11	50	0.2	2	Figure 1	○
B2S0400R0030LG	4.0	6	11	50	0.3	2	Figure 1	○
B2S0400R0050LG	4.0	6	11	50	0.5	2	Figure 1	●
B2S0400R0100LG	4.0	6	11	50	1.0	2	Figure 1	●
B2S0500R0030LG	5.0	6	13	50	0.3	2	Figure 1	○
B2S0500R0050LG	5.0	6	13	50	0.5	2	Figure 1	●
B2S0500R0100LG	5.0	6	13	50	1.0	2	Figure 1	●
B2S0600R0030LG	6.0	6	16	50	0.3	2	Figure 2	○
B2S0600R0050LG	6.0	6	16	50	0.5	2	Figure 2	●
B2S0600R0100LG	6.0	6	16	50	1.0	2	Figure 2	●
B2S0800R0030LG	8.0	8	20	60	0.3	2	Figure 2	○
B2S0800R0050LG	8.0	8	20	60	0.5	2	Figure 2	●
B2S0800R0100LG	8.0	8	20	60	1.0	2	Figure 2	●
B2S1000R0050LG	10.0	10	25	75	0.5	2	Figure 2	●
B2S1000R0100LG	10.0	10	25	75	1.0	2	Figure 2	●
B2S1000R0150LG	10.0	10	25	75	1.5	2	Figure 2	●
B2S1000R0200LG	10.0	10	25	75	2.0	2	Figure 2	●
B2S1200R0050LG	12.0	12	30	75	0.5	2	Figure 2	●
B2S1200R0100LG	12.0	12	30	75	1.0	2	Figure 2	●
B2S1200R0150LG	12.0	12	30	75	1.5	2	Figure 2	●
B2S1200R0200LG	12.0	12	30	75	2.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 General turning
 Threading
 Parting and grooving
 Turning of small components
 General turning
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 General turning
 Threading
 Parting and grooving
 Turning of small components
 General turning
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill
 Solid carbide drill

Recommended cutting conditions—B2S···R···LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	< 240	60	90	120
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	< 320	90	110	130
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	< 130	-	-	-
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	< 400	60	70	80
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	3.0	3.0	1.2	0.025	2.3	3.0	0.020
	4.0	4.0	1.6	0.030	3.0	4.0	0.025
	5.0	5.0	2.0	0.035	3.8	5.0	0.030
	6.0	6.0	2.4	0.045	4.5	6.0	0.035
	8.0	8.0	3.2	0.060	6.0	8.0	0.050
	10.0	10.0	4.0	0.070	7.5	10.0	0.060
	12.0	12.0	4.8	0.085	9.0	12.0	0.070

- Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the Feed rate (feed rate) to 40%-60%.
- Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Four-flute R end mill (short flute structure)

B4S···R···LG

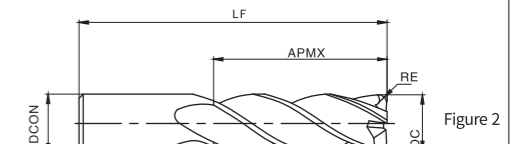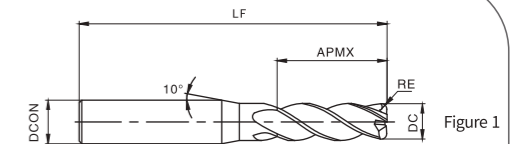

B Series $DC \leq 12 \quad 0, -0.02$
 $DC > 12 \quad 0, -0.03$ $R \pm 0.01$

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B4S0300R0020LG-4	3.0	4	8	50	0.2	4	Figure 1	●
B4S0400R0030LG-4	4.0	4	10	50	0.3	4	Figure 2	○
B4S0400R0050LG-4	4.0	4	10	50	0.5	4	Figure 2	●
B4S0300R0020LG	3.0	6	8	50	0.2	4	Figure 1	●
B4S0400R0030LG	4.0	6	10	50	0.3	4	Figure 1	●
B4S0400R0050LG	4.0	6	10	50	0.5	4	Figure 1	●
B4S0500R0050LG	5.0	6	13	50	0.5	4	Figure 1	●
B4S0500R0100LG	5.0	6	13	50	1.0	4	Figure 1	●
B4S0600R0050LG	6.0	6	16	50	0.5	4	Figure 2	●
B4S0600R0100LG	6.0	6	16	50	1.0	4	Figure 2	●
B4S0800R0050LG	8.0	8	20	60	0.5	4	Figure 2	●
B4S0800R0100LG	8.0	8	20	60	1.0	4	Figure 2	●
B4S1000R0050LG	10.0	10	25	75	0.5	4	Figure 2	●
B4S1000R0100LG	10.0	10	25	75	1.0	4	Figure 2	●
B4S1000R0200LG	10.0	10	25	75	2.0	4	Figure 2	●
B4S1000R0300LG	10.0	10	25	75	3.0	4	Figure 2	●
B4S1200R0050LG	12.0	12	30	75	0.5	4	Figure 2	●
B4S1200R0100LG	12.0	12	30	75	1.0	4	Figure 2	●
B4S1200R0200LG	12.0	12	30	75	2.0	4	Figure 2	●
B4S1200R0300LG	12.0	12	30	75	3.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B4S··R··LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
3.0	3.0	1.2	0.025	2.3	3.0	0.020
4.0	4.0	1.6	0.030	3.0	4.0	0.025
5.0	5.0	2.0	0.035	3.8	5.0	0.030
6.0	6.0	2.4	0.045	4.5	6.0	0.035
8.0	8.0	3.2	0.060	6.0	8.0	0.050
10.0	10.0	4.0	0.070	7.5	10.0	0.060
12.0	12.0	4.8	0.085	9.0	12.0	0.070

- Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the Feed rate (feed rate) to 40%-60%.
- Before vertical feed machining, decrease the feed rate to below 1/3 of the standard value in the above table.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Two-flute ball nose end mill (short flute structure)

B2S··BLG

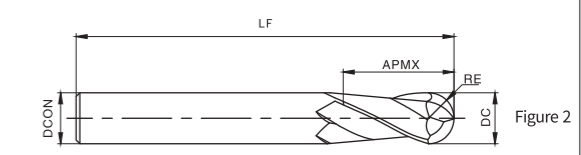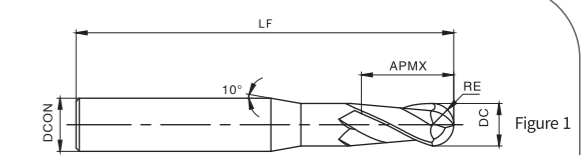

B Series 30° DC ≤ 12 0, -0.02 DC > 12 0, -0.03 R ± 0.01

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B2SR0050BLG-4	1.0	4	2	50	0.5	2	Figure 1	●
B2SR0075BLG-4	1.5	4	3	50	0.75	2	Figure 1	●
B2SR0100BLG-4	2.0	4	4	50	1.0	2	Figure 1	●
B2SR0125BLG-4	2.5	4	5	50	1.25	2	Figure 1	●
B2SR0150BLG-4	3.0	4	6	50	1.5	2	Figure 1	●
B2SR0175BLG-4	3.5	4	8	50	1.75	2	Figure 1	●
B2SR0200BLG-4	4.0	4	8	50	2.0	2	Figure 2	●
B2SR0050BLG	1.0	6	2	50	0.5	2	Figure 1	●
B2SR0075BLG	1.5	6	3	50	0.75	2	Figure 1	●
B2SR0100BLG	2.0	6	4	50	1.0	2	Figure 1	●
B2SR0125BLG	2.5	6	5	50	1.25	2	Figure 1	●
B2SR0150BLG	3.0	6	6	50	1.5	2	Figure 1	●
B2SR0175BLG	3.5	6	8	50	1.75	2	Figure 1	●
B2SR0200BLG	4.0	6	8	50	2.0	2	Figure 1	●
B2SR0250BLG	5.0	6	10	50	2.5	2	Figure 1	●
B2SR0275BLG	5.5	6	12	50	2.75	2	Figure 1	●
B2SR0300BLG	6.0	6	12	50	3.0	2	Figure 2	●
B2SR0350BLG	7.0	8	14	60	3.5	2	Figure 1	●
B2SR0400BLG	8.0	8	16	60	4.0	2	Figure 2	●
B2SR0450BLG	9.0	10	18	75	4.5	2	Figure 1	●
B2SR0500BLG	10.0	10	20	75	5.0	2	Figure 2	●
B2SR0600BLG	12.0	12	24	75	6.0	2	Figure 2	●
B2SR0700BLG	14.0	14	28	75	7.0	2	Figure 2	●
B2SR0800BLG	16.0	16	32	100	8.0	2	Figure 2	●
B2SR1000BLG	20.0	20	40	100	10.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼	☼	

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B2S...BLG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	< 240	60	90	120
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	< 320	90	110	130
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	< 130	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	< 400	60	70	80
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters				
Machining method	Profile milling			
Diameter (mm)	ap (0.1xDc)	ae (0.1xDc)	fz (mm/z)	
1.0	0.1	0.1	0.020	
1.5	0.15	0.15	0.030	
2.0	0.2	0.2	0.040	
2.5	0.25	0.25	0.050	
3.0	0.3	0.3	0.060	
3.5	0.35	0.35	0.070	
4.0	0.4	0.4	0.080	
5.0	0.5	0.5	0.100	
5.5	0.55	0.55	0.110	
6.0	0.6	0.6	0.120	
7.0	0.7	0.7	0.140	
8.0	0.8	0.8	0.160	
9.0	0.9	0.9	0.180	
10.0	1.0	1.0	0.200	
12.0	1.2	1.2	0.240	
14.0	1.4	1.4	0.300	
16.0	1.6	1.6	0.360	
20.0	2.0	2.0	0.400	

- (1) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (2) Air cooling or spray cooling is recommended.
- (3) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (4) The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Two-flute ball nose end mill (long flute structure)

B2L...BLG

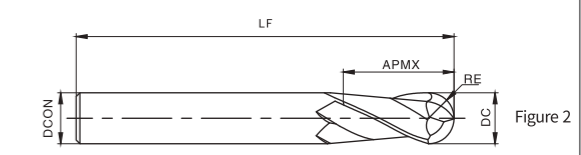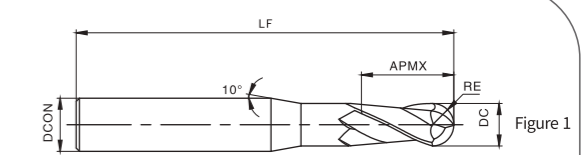

B Series $DC \leq 12 \quad 0, -0.02$ $DC > 12 \quad 0, -0.03$ $R \pm 0.01$

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B2LR0100BLG-4	2.0	4	4	75	1.0	2	Figure 1	●
B2LR0125BLG-4	2.5	4	5	75	1.25	2	Figure 1	●
B2LR0150BLG-4	3.0	4	6	75	1.5	2	Figure 1	●
B2LR0175BLG-4	3.5	4	8	75	1.75	2	Figure 1	●
B2LR0200BLG-4	4.0	4	8	75	2.0	2	Figure 2	●
B2LR0100BLG	2.0	6	4	75	1.0	2	Figure 1	●
B2LR0125BLG	2.5	6	5	75	1.25	2	Figure 1	●
B2LR0150BLG	3.0	6	6	75	1.5	2	Figure 1	●
B2LR0175BLG	3.5	6	8	75	1.75	2	Figure 1	●
B2LR0200BLG	4.0	6	8	75	2.0	2	Figure 1	●
B2LR0250BLG	5.0	6	10	75	2.5	2	Figure 1	●
B2LR0275BLG	5.5	6	12	75	2.75	2	Figure 1	●
B2LR0300BLG	6.0	6	12	75	3.0	2	Figure 2	●
B2LR0350BLG	7.0	8	14	75	3.5	2	Figure 1	●
B2LR0400BLG	8.0	8	16	100	4.0	2	Figure 2	●
B2LR0450BLG	9.0	10	18	100	4.5	2	Figure 1	●
B2LR0500BLG	10.0	10	20	100	5.0	2	Figure 2	●
B2LR0600BLG	12.0	12	24	100	6.0	2	Figure 2	●
B2LR0700BLG	14.0	14	28	100	7.0	2	Figure 2	●
B2LR0800BLG	16.0	16	32	150	8.0	2	Figure 2	●
B2LR1000BLG	20.0	20	40	150	10.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼	☼	

☼ Fit well ☼ Applicable

Recommended cutting conditions—B2L...BLG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters				
Machining method	Profile milling			
Diameter (mm)	ap (0.1xDc)	ae (0.1xDc)	fz (mm/z)	
2.0	0.2	0.2	0.040	
2.5	0.25	0.25	0.050	
3.0	0.3	0.3	0.060	
3.5	0.35	0.35	0.070	
4.0	0.4	0.4	0.080	
5.0	0.5	0.5	0.100	
5.5	0.55	0.55	0.110	
6.0	0.6	0.6	0.120	
7.0	0.7	0.7	0.140	
8.0	0.8	0.8	0.160	
9.0	0.9	0.9	0.180	
10.0	1.0	1.0	0.200	
12.0	1.2	1.2	0.240	
14.0	1.4	1.4	0.300	
16.0	1.6	1.6	0.360	
20.0	2.0	2.0	0.400	

- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Air cooling or spray cooling is recommended.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Four-flute ball nose end mill (short flute structure)

B4S...BLG

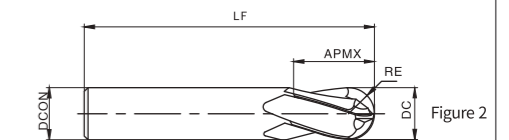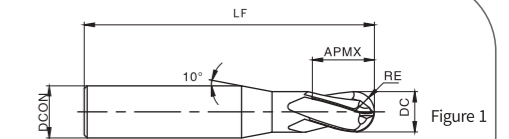

B Series 30° DC ≤ 12 0, -0.02 DC > 12 0, -0.03 R_{R±0.01}

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B4SR0150BLG-4	3.0	4	6	50	1.5	4	Figure 1	●
B4SR0200BLG-4	4.0	4	8	50	2.0	4	Figure 2	○
B4SR0150BLG	3.0	6	6	50	1.5	4	Figure 1	○
B4SR0200BLG	4.0	6	8	50	2.0	4	Figure 1	●
B4SR0250BLG	5.0	6	10	50	2.5	4	Figure 1	●
B4SR0300BLG	6.0	6	12	50	3.0	4	Figure 2	●
B4SR0400BLG	8.0	8	16	60	4.0	4	Figure 2	●
B4SR0500BLG	10.0	10	20	75	5.0	4	Figure 2	●
B4SR0600BLG	12.0	12	24	75	6.0	4	Figure 2	●
B4SR0800BLG	16.0	16	32	100	8.0	4	Figure 2	●
B4SR1000BLG	20.0	20	40	100	10.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

Recommended cutting conditions—B4S...BLG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	


Recommended Cutting Parameters				
Machining method	Profile milling			
Diameter (mm)	ap (0.1xDc)	ae (0.1xDc)	fz (mm/z)	
3.0	0.3	0.3	0.060	
4.0	0.4	0.4	0.080	
5.0	0.5	0.5	0.100	
6.0	0.6	0.6	0.120	
8.0	0.8	0.8	0.160	
10.0	1.0	1.0	0.200	
12.0	1.2	1.2	0.240	
16.0	1.6	1.6	0.360	
20.0	2.0	2.0	0.400	

- (1) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (2) Air cooling or spray cooling is recommended.
- (3) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (4) The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Four-flute ball nose end mill (long flute structure)

B4L...BLG

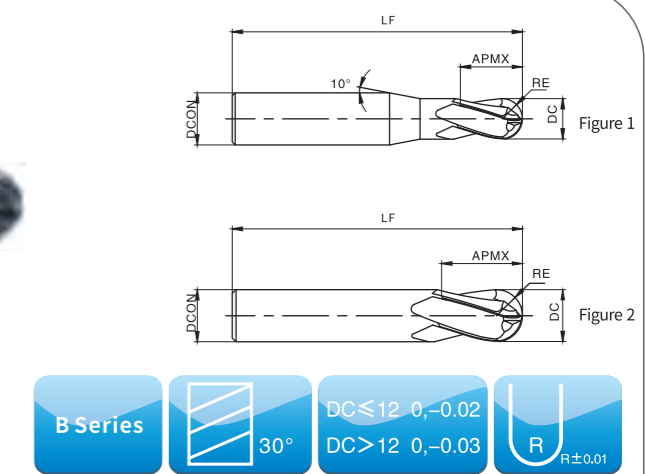

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B4LR0150BLG-4	3.0	4	6	75	1.5	4	Figure 1	●
B4LR0200BLG-4	4.0	4	8	75	2.0	4	Figure 2	○
B4LR0150BLG	3.0	6	6	75	1.5	4	Figure 1	○
B4LR0200BLG	4.0	6	8	75	2.0	4	Figure 1	●
B4LR0250BLG	5.0	6	10	75	2.5	4	Figure 1	●
B4LR0300BLG	6.0	6	12	75	3.0	4	Figure 2	●
B4LR0400BLG	8.0	8	16	100	4.0	4	Figure 2	●
B4LR0500BLG	10.0	10	20	100	5.0	4	Figure 2	●
B4LR0600BLG	12.0	12	24	100	6.0	4	Figure 2	●
B4LR0800BLG	16.0	16	32	150	8.0	4	Figure 2	●
B4LR1000BLG	20.0	20	40	150	10.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading Parting and grooving
 Tiring of small components
 Solid carbide drill
 Solid carbide end mill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading Parting and grooving
 Tiring of small components
 Solid carbide drill
 Solid carbide end mill
 Solid carbide drill

Recommended cutting conditions—B4L...BLG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters					
Machining method	Profile milling				
Diameter (mm)	ap (0.1xDc)	ae (0.1xDc)	fz (mm/z)		
3.0	0.3	0.3	0.060		
4.0	0.4	0.4	0.080		
5.0	0.5	0.5	0.010		
6.0	0.6	0.6	0.120		
8.0	0.8	0.8	0.160		
10.0	1.0	1.0	0.200		
12.0	1.2	1.2	0.240		
16.0	1.6	1.6	0.320		
20.0	2.0	2.0	0.400		

- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Air cooling or spray cooling is recommended.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series B--Basic end mills

Two-flute flat end mill (aluminum alloy machining)

B2S...HN



B Series $DC \leq 12 \quad 0, -0.02$ $DC > 12 \quad 0, -0.03$

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B2S0100HN-4	1.0	4	3	50	2	Figure 1	●
B2S0150HN-4	1.5	4	4	50	2	Figure 1	●
B2S0200HN-4	2.0	4	6	50	2	Figure 1	●
B2S0250HN-4	2.5	4	7	50	2	Figure 1	●
B2S0300HN-4	3.0	4	9	50	2	Figure 1	●
B2S0400HN-4	4.0	4	12	50	2	Figure 2	●
B2S0300HN	3.0	6	9	50	2	Figure 1	●
B2S0400HN	4.0	6	12	50	2	Figure 1	○
B2S0500HN	5.0	6	15	50	2	Figure 1	○
B2S0600HN	6.0	6	18	60	2	Figure 2	●
B2S0800HN	8.0	8	20	60	2	Figure 2	●
B2S1000HN	10.0	10	30	75	2	Figure 2	●
B2S1200HN	12.0	12	32	75	2	Figure 2	●
B2S1600HN	16.0	16	45	100	2	Figure 2	●
B2S2000HN	20.0	20	45	100	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙	⚙					

⚙ Fit well ⚙ Applicable

Recommended cutting conditions—B2S···HN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	120	160	350
	Aluminum alloy	< 530	< 130	150	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1.5xD _c)	ae (0.1xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)	f _z (mm/z)
1.0	1.5	0.1	0.010	0.75	1.0	0.003
1.5	2.25	0.15	0.015	1.2	1.5	0.004
2.0	3.0	0.3	0.020	1.5	2.0	0.006
2.5	3.75	0.25	0.025	1.9	2.5	0.008
3.0	4.5	0.3	0.030	2.3	3.0	0.010
4.0	6.0	0.4	0.040	3.0	4.0	0.013
5.0	7.5	0.5	0.050	3.8	5.0	0.017
6.0	9.0	0.6	0.060	4.5	6.0	0.020
8.0	12.0	0.8	0.080	6.0	8.0	0.027
10.0	15.0	1.0	0.100	7.5	10.0	0.033
12.0	18.0	1.2	0.120	9.0	12.0	0.040
16.0	24.0	1.6	0.160	12.0	16.0	0.053
20.0	30.0	2.0	0.200	15.0	20.0	0.067

(1) This series of tools is special for aluminum alloy machining;
 (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.

Series B--Basic end mills

Two-flute flat end mill (aluminum alloy machining)

B2L···HN



B Series $DC \leq 12 \begin{matrix} 0, -0.02 \\ DC > 12 \end{matrix} \begin{matrix} 0, -0.03 \\ 0, -0.03 \end{matrix}$

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B2L0300HN-4	3.0	4	12	60	2	Figure 1	●
B2L0400HN-4	4.0	4	16	60	2	Figure 2	○
B2L0300HN	3.0	6	12	60	2	Figure 1	○
B2L0400HN	4.0	6	16	60	2	Figure 1	●
B2L0500HN	5.0	6	20	60	2	Figure 1	●
B2L0600HN	6.0	6	25	75	2	Figure 2	●
B2L0800HN	8.0	8	32	75	2	Figure 2	●
B2L1000HN	10.0	10	45	100	2	Figure 2	●
B2L1200HN	12.0	12	45	100	2	Figure 2	●
B2L1600HN	16.0	16	65	150	2	Figure 2	●
B2L2000HN	20.0	20	75	150	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙	⚙					

⚙ Fit well ⚙ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B2L...HN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	120	160	350
	Aluminum alloy	< 530	< 130	150	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	Diameter (mm)	ap (1.5xD _c)	ae (0.1xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)
1.0	1.5	0.1	0.010	0.75	1.0	0.003
1.5	2.25	0.15	0.015	1.2	1.5	0.004
2.0	3.0	0.3	0.020	1.5	2.0	0.006
2.5	3.75	0.25	0.025	1.9	2.5	0.008
3.0	4.5	0.3	0.030	2.3	3.0	0.010
4.0	6.0	0.4	0.040	3.0	4.0	0.013
5.0	7.5	0.5	0.050	3.8	5.0	0.017
6.0	9.0	0.6	0.060	4.5	6.0	0.020
8.0	12.0	0.8	0.080	6.0	8.0	0.027
10.0	15.0	1.0	0.100	7.5	10.0	0.033
12.0	18.0	1.2	0.120	9.0	12.0	0.040
16.0	24.0	1.6	0.160	12.0	16.0	0.053
20.0	30.0	2.0	0.200	15.0	20.0	0.067

(1) This series of tools is special for aluminum alloy machining;
 (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.

Series B--Basic end mills

Three-flute flat end mill (aluminum alloy machining)

B3S...HN

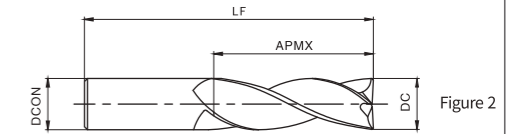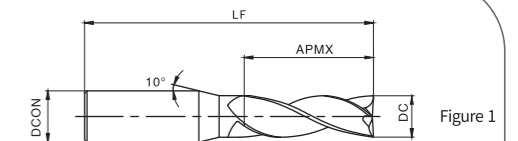

B Series 45° DC ≤ 12 0, -0.02 90° DC > 12 0, -0.03

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B3S0100HN-4	1.0	4	3	50	3	Figure 1	●
B3S0150HN-4	1.5	4	4	50	3	Figure 1	●
B3S0200HN-4	2.0	4	6	50	3	Figure 1	●
B3S0250HN-4	2.5	4	7	50	3	Figure 1	●
B3S0300HN-4	3.0	4	9	50	3	Figure 1	●
B3S0400HN-4	4.0	4	12	50	3	Figure 2	●
B3S0300HN	3.0	6	9	50	3	Figure 1	●
B3S0400HN	4.0	6	12	50	3	Figure 1	○
B3S0500HN	5.0	6	15	50	3	Figure 1	○
B3S0600HN	6.0	6	18	60	3	Figure 2	●
B3S0800HN	8.0	8	20	60	3	Figure 2	●
B3S1000HN	10.0	10	30	75	3	Figure 2	●
B3S1200HN	12.0	12	32	75	3	Figure 2	●
B3S1600HN	16.0	16	45	100	3	Figure 2	●
B3S2000HN	20.0	20	45	100	3	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙	⚙					

⚙ Fit well ⚙ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—B3S...HN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	120	160	350
	Aluminum alloy	< 530	< 130	150	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1.5xDc)	ae (0.1xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
3.0	4.5	0.3	0.030	2.3	3.0	0.010
4.0	6.0	0.4	0.040	3.0	4.0	0.013
5.0	7.5	0.5	0.050	3.8	5.0	0.017
6.0	9.0	0.6	0.060	4.5	6.0	0.020
8.0	12.0	0.8	0.080	6.0	8.0	0.027
10.0	15.0	1.0	0.100	7.5	10.0	0.033
12.0	18.0	1.2	0.120	9.0	12.0	0.040
16.0	24.0	1.6	0.160	12.0	16.0	0.053
20.0	30.0	2.0	0.200	15.0	20.0	0.067

(1) This series of tools is special for aluminum alloy machining;
 (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.

Series B--Basic end mills

Three-flute flat end mill (aluminum alloy machining)

B3L...HN

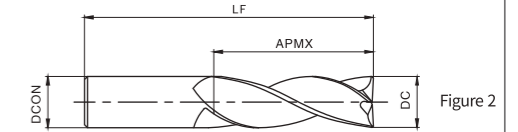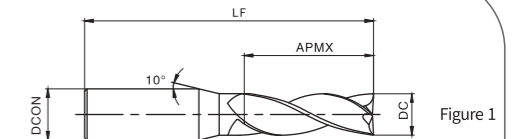

B Series 45° DC ≤ 12 0, -0.02 DC > 12 0, -0.03 90°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
B3L0300HN-4	3.0	4	12	60	3	Figure 1	●
B3L0400HN-4	4.0	4	16	60	3	Figure 2	○
B3L0300HN	3.0	6	12	60	3	Figure 1	○
B3L0400HN	4.0	6	16	60	3	Figure 1	●
B3L0500HN	5.0	6	20	60	3	Figure 1	●
B3L0600HN	6.0	6	25	75	3	Figure 2	●
B3L0800HN	8.0	8	32	75	3	Figure 2	●
B3L1000HN	10.0	10	45	100	3	Figure 2	●
B3L1200HN	12.0	12	45	100	3	Figure 2	●
B3L1600HN	16.0	16	65	150	3	Figure 2	●
B3L2000HN	20.0	20	75	150	3	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙️	⚙️					

⚙️ Fit well ⚙️ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Solid carbide drill
 Threading
 Parting and grooving
 Tiring of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Tiring of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Recommended cutting conditions—B3L...HN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	< 220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	120	160	350
	Aluminum alloy	< 530	< 130	150	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	< 2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1.5xDc)	ae (0.1xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
3.0	4.5	0.3	0.030	2.3	3.0	0.010
4.0	6.0	0.4	0.040	3.0	4.0	0.013
5.0	7.5	0.5	0.050	3.8	5.0	0.017
6.0	9.0	0.6	0.060	4.5	6.0	0.020
8.0	12.0	0.8	0.080	6.0	8.0	0.027
10.0	15.0	1.0	0.100	7.5	10.0	0.033
12.0	18.0	1.2	0.120	9.0	12.0	0.040
16.0	24.0	1.6	0.160	12.0	16.0	0.053
20.0	30.0	2.0	0.200	15.0	20.0	0.067

(1) This series of tools is special for aluminum alloy machining;
 (2) Before slot milling, please reduce the cutting speed (rotating speed) to 50%-70% of the value indicated in the table above, and the feed rate (feed rate) to 40%-60%.

Series B--Basic end mills

Two-flute ball nose end mill (aluminum alloy machining)

B2S...BLN

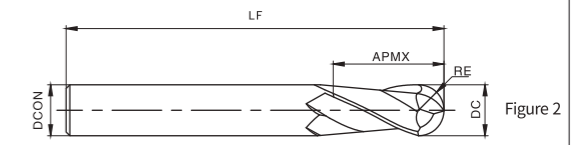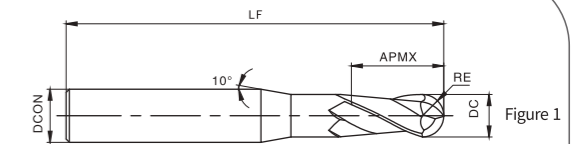

B Series $DC \leq 12 \begin{matrix} 0, -0.02 \\ DC > 12 \end{matrix} \begin{matrix} 0, -0.03 \\ 0, -0.03 \end{matrix}$ $R \pm 0.01$

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
B2SR0100BLN	2.0	6	4	60	1.0	2	Figure 1	●
B2SR0150BLN	3.0	6	6	60	1.5	2	Figure 2	○
B2SR0200BLN	4.0	6	8	60	2.0	2	Figure 1	○
B2SR0250BLN	5.0	6	10	60	2.5	2	Figure 1	●
B2SR0300BLN	6.0	6	12	60	3.0	2	Figure 1	●
B2SR0400BLN	8.0	8	16	75	4.0	2	Figure 1	●
B2SR0500BLN	10.0	10	20	75	5.0	2	Figure 1	●
B2SR0600BLN	12.0	12	24	75	6.0	2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
					⚙	⚙					

⚙ Fit well ⚙ Applicable

Recommended cutting conditions—B2S···BLN

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	-	-	-	
	Alloy steel	< 1200	< 350	-	-	
	High-alloyed steel and tool steel	< 1400	< 380	-	-	
M Austenite and ferrite stainless steel	< 680	< 220	-	-	-	
	Martensite stainless steel	< 820	< 240	-	-	
K Gray cast iron	-	< 280	-	-	-	
	Nodular iron	-	< 320	-	-	
N Non-ferrous alloy	< 250	< 110	120	160	350	
	Aluminum alloy	< 530	< 130	150	200	300
S Heat resistant super alloys	< 3300	< 350	-	-	-	
	Titanium alloy	< 2100	< 400	-	-	
H Hardened steel	-	< 54HRC	-	-	-	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (0.1xD _c)	ae (0.1xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)	f _z (mm/z)
	2.0	0.2	0.2	0.040	1.5	2.0	0.010
	3.0	0.3	0.3	0.060	2.3	3.0	0.010
	4.0	0.4	0.4	0.080	3.0	4.0	0.013
	5.0	0.5	0.5	0.100	3.8	5.0	0.017
	6.0	0.6	0.6	0.120	4.5	6.0	0.020
	8.0	0.8	0.8	0.160	6.0	8.0	0.027
	10.0	1.0	1.0	0.200	7.5	10.0	0.033
	12.0	1.2	1.2	0.240	9.0	12.0	0.040

- (1) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (2) Air cooling or spray cooling is recommended.
- (3) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (4) The tool overhang is as short as possible without affecting the use.

Series P--High performance end mills

Four-flute flat end mill (short flute structure)

P4S···LG

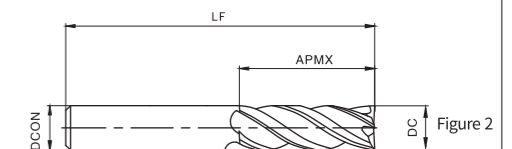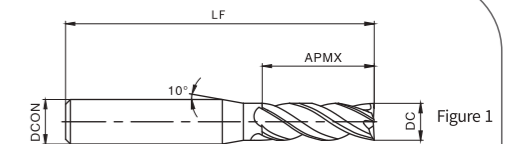

P Series

Flute angles: 31°, 28°, 45°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
P4S0100LG-4	1.0	4	3	50	4	Figure 1	●
P4S0150LG-4	1.5	4	4	50	4	Figure 1	○
P4S0200LG-4	2.0	4	6	50	4	Figure 1	●
P4S0250LG-4	2.5	4	8	50	4	Figure 1	○
P4S0300LG-4	3.0	4	8	50	4	Figure 1	●
P4S0350LG-4	3.5	4	10	50	4	Figure 1	○
P4S0400LG-4	4.0	4	11	50	4	Figure 2	●
P4S0100LG	1.0	6	3	50	4	Figure 1	●
P4S0150LG	1.5	6	4	50	4	Figure 1	○
P4S0200LG	2.0	6	6	50	4	Figure 1	●
P4S0250LG	2.5	6	8	50	4	Figure 1	○
P4S0300LG	3.0	6	8	50	4	Figure 1	●
P4S0350LG	3.5	6	10	50	4	Figure 1	○
P4S0400LG	4.0	6	11	50	4	Figure 1	●
P4S0450LG	4.5	6	11	50	4	Figure 1	○
P4S0500LG	5.0	6	13	50	4	Figure 1	●
P4S0550LG	5.5	6	16	50	4	Figure 1	○
P4S0600LG	6.0	6	16	50	4	Figure 2	●
P4S0700LG	7.0	8	20	50	4	Figure 1	●
P4S0800LG	8.0	8	20	60	4	Figure 2	●
P4S0900LG	9.0	10	22	75	4	Figure 1	●
P4S1000LG	10.0	10	25	75	4	Figure 2	●
P4S1100LG	11.0	12	26	75	4	Figure 1	●
P4S1200LG	12.0	12	30	75	4	Figure 2	●
P4S1400LG	14.0	14	32	75	4	Figure 2	●
P4S1600LG	16.0	16	45	100	4	Figure 2	●
P4S1800LG	18.0	18	45	100	4	Figure 2	●
P4S2000LG	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Recommended cutting conditions—P4S...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
1.0	1.0	0.3	0.012	0.8	1.0	0.010
1.5	1.5	0.5	0.015	1.1	1.5	0.012
2.0	2.0	0.6	0.018	1.5	2.0	0.015
2.5	2.5	0.8	0.020	1.9	2.5	0.018
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
5.5	5.5	1.7	0.035	4.1	5.5	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
7.0	7.0	2.1	0.050	5.3	7.0	0.040
8.0	8.0	2.4	0.060	6.0	8.0	0.050
9.0	9.0	2.7	0.065	6.8	9.0	0.055
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.075	8.3	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

(1) Water-soluble cutting fluid is recommended during machining stainless steel.
 (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
 (3) The down milling is recommended for side milling.
 (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (necking structure)

P4P...LG

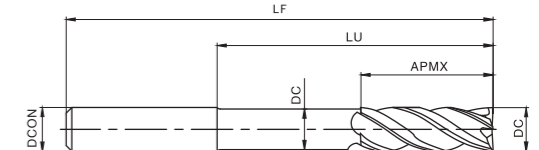

Type	Dimension (mm)							Inventory
	DC	DCON	APMX	LU	DN	LF	ZEFP	
P4P0600LG	6.0	6	9	30	5.8	75	4	●
P4P0800LG	8.0	8	12	40	7.8	100	4	●
P4P1000LG	10.0	10	15	50	9.6	100	4	●
P4P1200LG	12.0	12	18	50	11.5	100	4	●
P4P1600LG	16.0	16	24	50	15.5	150	4	●
P4P2000LG	20.0	20	30	60	19.5	150	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
12.0	12.0	3.6	0.085	9.0	12.0	0.070
16.0	16.0	4.8	0.115	12.0	16.0	0.095
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (short flute structure)

P4S...NG

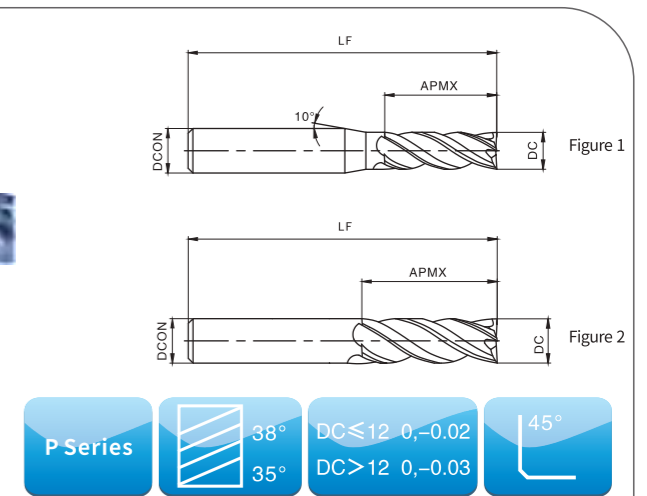

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
P4S0100NG-4	1.0	4	3	50	4	Figure 1	●
P4S0150NG-4	1.5	4	4	50	4	Figure 1	○
P4S0200NG-4	2.0	4	6	50	4	Figure 1	●
P4S0250NG-4	2.5	4	8	50	4	Figure 1	○
P4S0300NG-4	3.0	4	8	50	4	Figure 1	●
P4S0350NG-4	3.5	4	10	50	4	Figure 1	○
P4S0400NG-4	4.0	4	11	50	4	Figure 2	●
P4S0100NG	1.0	6	3	50	4	Figure 1	●
P4S0150NG	1.5	6	4	50	4	Figure 1	○
P4S0200NG	2.0	6	6	50	4	Figure 1	●
P4S0250NG	2.5	6	8	50	4	Figure 1	○
P4S0300NG	3.0	6	8	50	4	Figure 1	●
P4S0350NG	3.5	6	10	50	4	Figure 1	○
P4S0400NG	4.0	6	11	50	4	Figure 1	●
P4S0450NG	4.5	6	11	50	4	Figure 1	○
P4S0500NG	5.0	6	13	50	4	Figure 1	●
P4S0550NG	5.5	6	16	50	4	Figure 1	○
P4S0600NG	6.0	6	16	50	4	Figure 2	●
P4S0700NG	7.0	8	20	60	4	Figure 1	●
P4S0800NG	8.0	8	20	60	4	Figure 2	●
P4S0900NG	9.0	10	22	75	4	Figure 1	●
P4S1000NG	10.0	10	25	75	4	Figure 2	●
P4S1100NG	11.0	12	26	75	4	Figure 1	●
P4S1200NG	12.0	12	30	75	4	Figure 2	●
P4S1400NG	14.0	14	32	75	4	Figure 2	●
P4S1600NG	16.0	16	45	100	4	Figure 2	●
P4S1800NG	18.0	18	45	100	4	Figure 2	●
P4S2000NG	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S...NG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	< 240	60	90	120
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	< 320	90	110	130
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	< 130	-	-	-
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	< 400	60	70	80
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
1.0	1.0	0.3	0.012	0.8	1.0	0.010
1.5	1.5	0.5	0.015	1.1	1.5	0.012
2.0	2.0	0.6	0.018	1.5	2.0	0.015
2.5	2.5	0.8	0.020	1.9	2.5	0.018
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
5.5	5.5	1.7	0.035	4.1	5.5	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
7.0	7.0	2.1	0.050	5.3	7.0	0.040
8.0	8.0	2.4	0.060	6.0	8.0	0.050
9.0	9.0	2.7	0.065	6.8	9.0	0.055
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.075	8.3	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

(1) Water-soluble cutting fluid is recommended during machining stainless steel.
 (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
 (3) The down milling is recommended for side milling.
 (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (necking structure)

P4P...NG

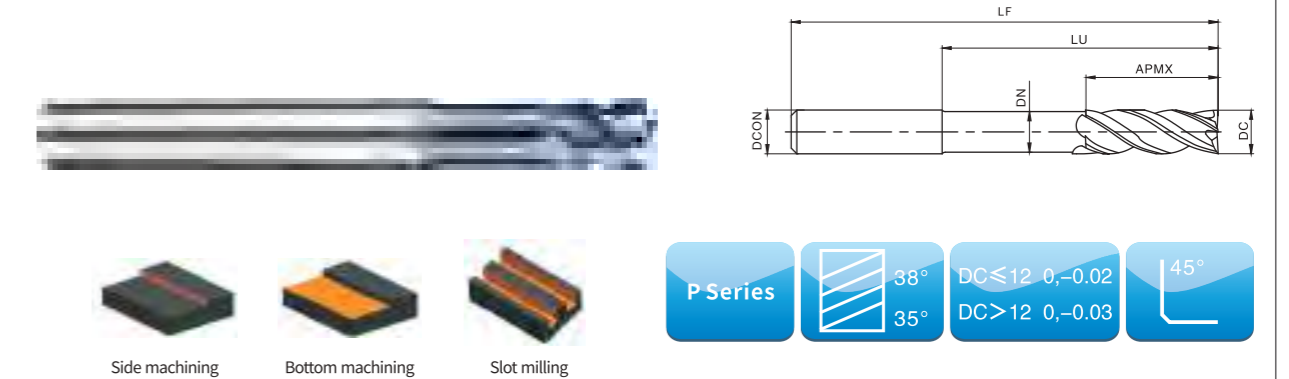

Type	Dimension (mm)							Inventory
	DC	DCON	APMX	LU	DN	LF	ZEFP	
P4P0600NG	6.0	6	9	30	5.8	75	4	●
P4P0800NG	8.0	8	12	40	7.8	100	4	●
P4P1000NG	10.0	10	15	50	9.6	100	4	●
P4P1200NG	12.0	12	18	50	11.5	100	4	●
P4P1600NG	16.0	16	24	50	15.5	150	4	●
P4P2000NG	20.0	20	30	60	19.5	150	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...NG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
12.0	12.0	3.6	0.085	9.0	12.0	0.070
16.0	16.0	4.8	0.115	12.0	16.0	0.095
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (short flute structure)

P4S...NS

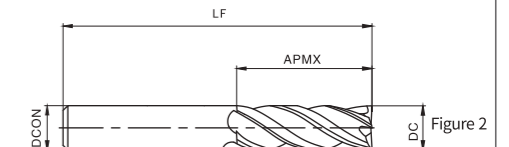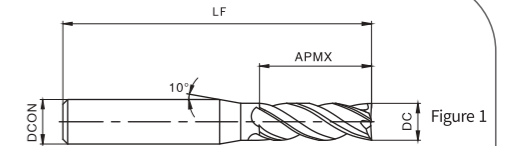

P Series

41° / 38°

DC ≤ 12 0, -0.02

DC > 12 0, -0.03

45°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
P4S0100NS-4	1.0	4	3	50	4	Figure 1	●
P4S0150NS-4	1.5	4	4	50	4	Figure 1	○
P4S0200NS-4	2.0	4	6	50	4	Figure 1	●
P4S0250NS-4	2.5	4	8	50	4	Figure 1	○
P4S0300NS-4	3.0	4	8	50	4	Figure 1	●
P4S0350NS-4	3.5	4	10	50	4	Figure 1	○
P4S0400NS-4	4.0	4	11	50	4	Figure 2	●
P4S0100NS	1.0	6	3	50	4	Figure 1	●
P4S0150NS	1.5	6	4	50	4	Figure 1	○
P4S0200NS	2.0	6	6	50	4	Figure 1	●
P4S0250NS	2.5	6	8	50	4	Figure 1	○
P4S0300NS	3.0	6	8	50	4	Figure 1	●
P4S0350NS	3.5	6	10	50	4	Figure 1	○
P4S0400NS	4.0	6	11	50	4	Figure 1	●
P4S0450NS	4.5	6	11	50	4	Figure 1	○
P4S0500NS	5.0	6	13	50	4	Figure 1	●
P4S0550NS	5.5	6	16	50	4	Figure 1	○
P4S0600NS	6.0	6	16	50	4	Figure 2	●
P4S0700NS	7.0	8	20	50	4	Figure 1	●
P4S0800NS	8.0	8	20	60	4	Figure 2	●
P4S0900NS	9.0	10	22	75	4	Figure 1	●
P4S1000NS	10.0	10	25	75	4	Figure 2	●
P4S1100NS	11.0	12	26	75	4	Figure 1	●
P4S1200NS	12.0	12	30	75	4	Figure 2	●
P4S1400NS	14.0	14	32	75	4	Figure 2	●
P4S1600NS	16.0	16	45	100	4	Figure 2	●
P4S1800NS	18.0	18	45	100	4	Figure 2	●
P4S2000NS	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S...NS

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xD _c)	ae (0.3xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)	f _z (mm/z)
1.0	1.0	0.3	0.012	0.8	1.0	0.010
1.5	1.5	0.5	0.015	1.1	1.5	0.012
2.0	2.0	0.6	0.018	1.5	2.0	0.015
2.5	2.5	0.8	0.020	1.9	2.5	0.018
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
5.5	5.5	1.7	0.035	4.1	5.5	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
7.0	7.0	2.1	0.050	5.3	7.0	0.040
8.0	8.0	2.4	0.060	6.0	8.0	0.050
9.0	9.0	2.7	0.065	6.8	9.0	0.055
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.075	8.3	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- Water-soluble cutting fluid is recommended during machining stainless steel.
- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- The down milling is recommended for side milling.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (necking structure)

P4P...NS

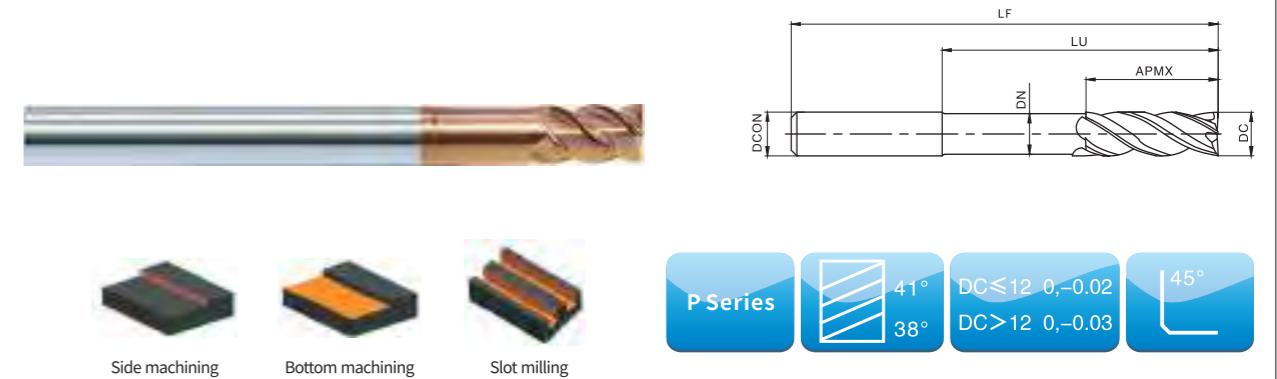

Type	Dimension (mm)							Inventory
	DC	DCON	APMX	LU	DN	LF	ZEFP	
P4P0600NS	6.0	6	9	30	5.8	75	4	●
P4P0800NS	8.0	8	12	40	7.8	100	4	●
P4P1000NS	10.0	10	15	50	9.6	100	4	●
P4P1200NS	12.0	12	18	50	11.5	100	4	●
P4P1600NS	16.0	16	24	50	15.5	150	4	●
P4P2000NS	20.0	20	30	60	19.5	150	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...NS

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	-	-	-	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	




Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (short flute structure)

P4S...HH

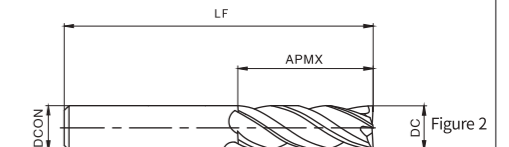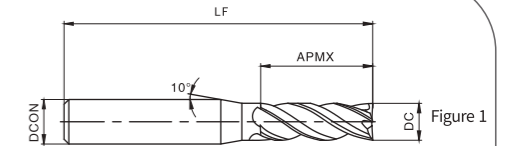

P Series

45° / 42°

DC ≤ 12 0, -0.02

DC > 12 0, -0.03

45°

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
P4S0100HH-4	1.0	4	3	50	4	Figure 1	●
P4S0150HH-4	1.5	4	4	50	4	Figure 1	○
P4S0200HH-4	2.0	4	6	50	4	Figure 1	●
P4S0250HH-4	2.5	4	8	50	4	Figure 1	○
P4S0300HH-4	3.0	4	8	50	4	Figure 1	●
P4S0350HH-4	3.5	4	10	50	4	Figure 1	○
P4S0400HH-4	4.0	4	11	50	4	Figure 2	●
P4S0100HH	1.0	6	3	50	4	Figure 1	●
P4S0150HH	1.5	6	4	50	4	Figure 1	○
P4S0200HH	2.0	6	6	50	4	Figure 1	●
P4S0250HH	2.5	6	8	50	4	Figure 1	○
P4S0300HH	3.0	6	8	50	4	Figure 1	●
P4S0350HH	3.5	6	10	50	4	Figure 1	○
P4S0400HH	4.0	6	11	50	4	Figure 1	●
P4S0450HH	4.5	6	11	50	4	Figure 1	○
P4S0500HH	5.0	6	13	50	4	Figure 1	●
P4S0550HH	5.5	6	16	50	4	Figure 1	○
P4S0600HH	6.0	6	16	50	4	Figure 2	●
P4S0700HH	7.0	8	20	50	4	Figure 1	●
P4S0800HH	8.0	8	20	60	4	Figure 2	●
P4S0900HH	9.0	10	22	75	4	Figure 1	●
P4S1000HH	10.0	10	25	75	4	Figure 2	●
P4S1100HH	11.0	12	26	75	4	Figure 1	●
P4S1200HH	12.0	12	30	75	4	Figure 2	●
P4S1400HH	14.0	14	32	75	4	Figure 2	●
P4S1600HH	16.0	16	45	100	4	Figure 2	●
P4S1800HH	18.0	18	45	100	4	Figure 2	●
P4S2000HH	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙	⚙	⚙		⚙					⚙	⚙	⚙

⚙ Fit well ⚙ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S...HH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	70	100	130
	Hardened steel	-	> 60 HRC	60	70	80



Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xD _c)	ae (0.3xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)	f _z (mm/z)
1.0	1.0	0.3	0.012	0.8	1.0	0.010
1.5	1.5	0.5	0.015	1.1	1.5	0.012
2.0	2.0	0.6	0.018	1.5	2.0	0.015
2.5	2.5	0.8	0.020	1.9	2.5	0.018
3.0	3.0	0.9	0.025	2.3	3.0	0.020
3.5	3.5	1.1	0.025	2.6	3.5	0.025
4.0	4.0	1.2	0.030	3.0	4.0	0.025
4.5	4.5	1.4	0.035	3.4	4.5	0.030
5.0	5.0	1.5	0.035	3.8	5.0	0.030
5.5	5.5	1.7	0.035	4.1	5.5	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
7.0	7.0	2.1	0.050	5.3	7.0	0.040
8.0	8.0	2.4	0.060	6.0	8.0	0.050
9.0	9.0	2.7	0.065	6.8	9.0	0.055
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.075	8.3	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
14.0	14.0	4.2	0.100	10.5	14.0	0.085
16.0	16.0	4.8	0.115	12.0	16.0	0.095
18.0	18.0	5.4	0.130	13.5	18.0	0.105
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute flat end mill (necking structure)

P4P...HH

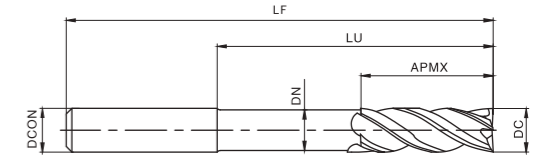

Type	Dimension (mm)							Inventory
	DC	DCON	APMX	LU	DN	LF	ZEFP	
P4P0600HH	6.0	6	9	30	5.8	75	4	●
P4P0800HH	8.0	8	12	40	7.8	100	4	●
P4P1000HH	10.0	10	15	50	9.6	100	4	●
P4P1200HH	12.0	12	18	50	11.5	100	4	●
P4P1600HH	16.0	16	24	50	15.5	150	4	●
P4P2000HH	20.0	20	30	60	19.5	150	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙️	⚙️	⚙️		⚙️					⚙️	⚙️	⚙️

⚙️ Fit well ⚙️ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...HH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	70	100	130
	Hardened steel	-	> 60 HRC	60	70	80


Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute R end mill (short flute structure)

P4S...R...LG

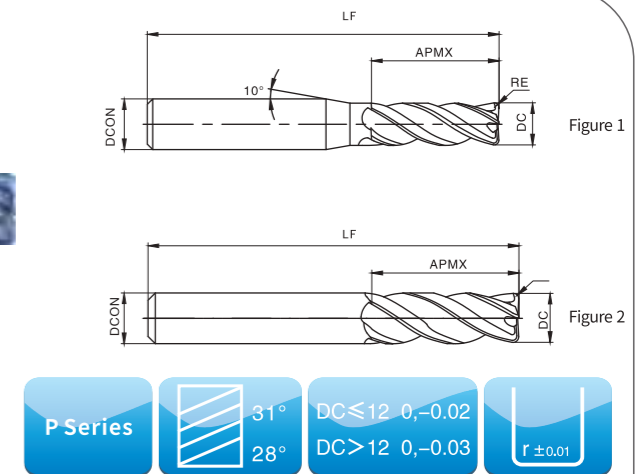

P Series

31° / 28°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

r ± 0.01

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P4S0300R0020LG-4	3.0	4	8	50	0.2	4	Figure 1	●
P4S0400R0030LG-4	4.0	4	10	50	0.3	4	Figure 2	●
P4S0400R0050LG-4	4.0	4	10	50	0.5	4	Figure 2	●
P4S0300R0020LG	3.0	6	8	50	0.2	4	Figure 1	●
P4S0400R0030LG	4.0	6	10	50	0.3	4	Figure 1	○
P4S0400R0050LG	4.0	6	10	50	0.5	4	Figure 1	●
P4S0500R0050LG	5.0	6	13	50	0.5	4	Figure 1	○
P4S0500R0100LG	5.0	6	13	50	1.0	4	Figure 1	○
P4S0600R0050LG	6.0	6	16	50	0.5	4	Figure 2	●
P4S0600R0100LG	6.0	6	16	50	1.0	4	Figure 2	●
P4S0800R0050LG	8.0	8	20	60	0.5	4	Figure 2	●
P4S0800R0100LG	8.0	8	20	60	1.0	4	Figure 2	●
P4S1000R0050LG	10.0	10	25	75	0.5	4	Figure 2	●
P4S1000R0100LG	10.0	10	25	75	1.0	4	Figure 2	●
P4S1000R0200LG	10.0	10	25	75	2.0	4	Figure 2	●
P4S1000R0300LG	10.0	10	25	75	3.0	4	Figure 2	●
P4S1200R0050LG	12.0	12	30	75	0.5	4	Figure 2	●
P4S1200R0100LG	12.0	12	30	75	1.0	4	Figure 2	●
P4S1200R0200LG	12.0	12	30	75	2.0	4	Figure 2	●
P4S1200R0300LG	12.0	12	30	75	3.0	4	Figure 2	●
P4S1600R0100LG	16.0	16	45	100	1.0	4	Figure 2	●
P4S1600R0200LG	16.0	16	45	100	2.0	4	Figure 2	●
P4S1600R0300LG	16.0	16	45	100	3.0	4	Figure 2	●
P4S2000R0100LG	20.0	20	45	100	1.0	4	Figure 2	●
P4S2000R0200LG	20.0	20	45	100	2.0	4	Figure 2	●
P4S2000R0300LG	20.0	20	45	100	3.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S··R··LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	–	< 280	120	150	180
	Nodular iron	–	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	–	–	–
	Aluminum alloy	< 530	< 130	–	–	–
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	–	< 54HRC	90	120	150
	Hardened steel	–	54–60HRC	–	–	–
	Hardened steel	–	> 60 HRC	–	–	–


Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	3.0	3.0	0.9	0.025	2.3	3.0	0.020
	4.0	4.0	1.2	0.030	3.0	4.0	0.025
	5.0	5.0	1.5	0.035	3.8	5.0	0.030
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute R end mill (necking structure)

P4P··R··LG

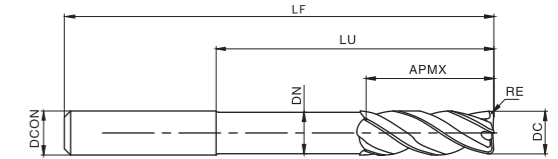

P Series

31°
28°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

r ± 0.01

Type	Dimension (mm)								Inventory
	DC	DCON	APMX	LU	DN	LF	RE	ZEFP	
P4P0600R0050LG	6.0	6	6	18	5.8	75	0.5	4	●
P4P0600R0100LG	6.0	6	6	18	5.8	75	1.0	4	●
P4P0800R0050LG	8.0	8	8	24	7.8	100	0.5	4	●
P4P0800R0100LG	8.0	8	8	24	7.8	100	1.0	4	●
P4P1000R0050LG	10.0	10	10	30	9.6	100	0.5	4	●
P4P1000R0100LG	10.0	10	10	30	9.6	100	1.0	4	●
P4P1000R0200LG	10.0	10	10	30	9.6	100	2.0	4	●
P4P1200R0050LG	12.0	12	12	36	11.5	100	0.5	4	●
P4P1200R0100LG	12.0	12	12	36	11.5	100	1.0	4	●
P4P1200R0200LG	12.0	12	12	36	11.5	100	2.0	4	●
P4P1600R0100LG	16.0	16	16	40	15.5	150	1.0	4	●
P4P1600R0200LG	16.0	16	16	40	15.5	150	2.0	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀		

☀ Fit well ☀ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill

Recommended cutting conditions—P4P...R...LG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	-	-	-	
	-	> 60 HRC	-	-	-	


Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095

- Water-soluble cutting fluid is recommended during machining stainless steel.
- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- The down milling is recommended for side milling.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute R end mill (short flute structure)

P4S...R...NG

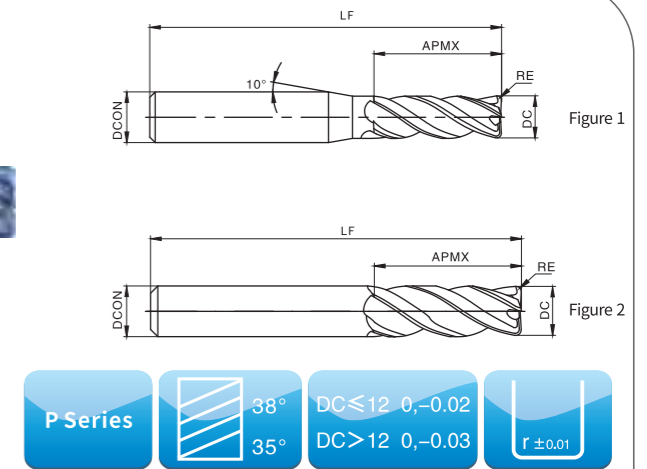

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P4S0300R0020NG-4	3.0	4	8	50	0.2	4	Figure 1	●
P4S0400R0030NG-4	4.0	4	10	50	0.3	4	Figure 2	●
P4S0400R0050NG-4	4.0	4	10	50	0.5	4	Figure 2	●
P4S0300R0020NG	3.0	6	8	50	0.2	4	Figure 1	●
P4S0400R0030NG	4.0	6	10	50	0.3	4	Figure 1	○
P4S0400R0050NG	4.0	6	10	50	0.5	4	Figure 1	○
P4S0500R0050NG	5.0	6	13	50	0.5	4	Figure 1	○
P4S0500R0100NG	5.0	6	13	50	1.0	4	Figure 1	●
P4S0600R0050NG	6.0	6	16	50	0.5	4	Figure 2	●
P4S0600R0100NG	6.0	6	16	50	1.0	4	Figure 2	●
P4S0800R0050NG	8.0	8	20	60	0.5	4	Figure 2	●
P4S0800R0100NG	8.0	8	20	60	1.0	4	Figure 2	●
P4S1000R0050NG	10.0	10	25	75	0.5	4	Figure 2	●
P4S1000R0100NG	10.0	10	25	75	1.0	4	Figure 2	●
P4S1000R0200NG	10.0	10	25	75	2.0	4	Figure 2	●
P4S1000R0300NG	10.0	10	25	75	3.0	4	Figure 2	●
P4S1200R0050NG	12.0	12	30	75	0.5	4	Figure 2	●
P4S1200R0100NG	12.0	12	30	75	1.0	4	Figure 2	●
P4S1200R0200NG	12.0	12	30	75	2.0	4	Figure 2	●
P4S1200R0300NG	12.0	12	30	75	3.0	4	Figure 2	●
P4S1600R0100NG	16.0	16	45	100	1.0	4	Figure 2	●
P4S1600R0200NG	16.0	16	45	100	2.0	4	Figure 2	●
P4S1600R0300NG	16.0	16	45	100	3.0	4	Figure 2	●
P4S2000R0100NG	20.0	20	45	100	1.0	4	Figure 2	●
P4S2000R0200NG	20.0	20	45	100	2.0	4	Figure 2	●
P4S2000R0300NG	20.0	20	45	100	3.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S··R··NG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	–	< 280	120	150	180	
	Nodular iron	–	90	110	130	
N Non-ferrous alloy	< 250	< 110	–	–	–	
	Aluminum alloy	< 530	–	–	–	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	–	< 54HRC	90	120	150	
	–	54–60HRC	–	–	–	
	–	> 60 HRC	–	–	–	


Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xD _c)	ae (0.3xD _c)	f _z (mm/z)	ap (0.75xD _c)	ae (1xD _c)	f _z (mm/z)
	3.0	3.0	0.9	0.025	2.3	3.0	0.020
	4.0	4.0	1.2	0.030	3.0	4.0	0.025
	5.0	5.0	1.5	0.035	3.8	5.0	0.030
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

- (1) Water-soluble cutting fluid is recommended during machining stainless steel.
- (2) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (3) The down milling is recommended for side milling.
- (4) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute R end mill (necking structure)

P4P··R··NG

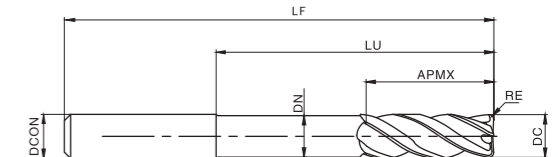

Side machining

Bottom machining

Slot milling

P Series

38°
35°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

r ±0.01

Type	Dimension (mm)								Inventory
	DC	DCON	APMX	LU	DN	LF	RE	ZEFP	
P4P0600R0050NG	6.0	6	6	18	5.8	75	0.5	4	●
P4P0600R0100NG	6.0	6	6	18	5.8	75	1.0	4	●
P4P0800R0050NG	8.0	8	8	24	7.8	100	0.5	4	●
P4P0800R0100NG	8.0	8	8	24	7.8	100	1.0	4	●
P4P1000R0050NG	10.0	10	10	30	9.6	100	0.5	4	●
P4P1000R0100NG	10.0	10	10	30	9.6	100	1.0	4	●
P4P1000R0200NG	10.0	10	10	30	9.6	100	2.0	4	●
P4P1200R0050NG	12.0	12	12	36	11.5	100	0.5	4	●
P4P1200R0100NG	12.0	12	12	36	11.5	100	1.0	4	●
P4P1200R0200NG	12.0	12	12	36	11.5	100	2.0	4	●
P4P1600R0100NG	16.0	16	16	40	15.5	150	1.0	4	●
P4P1600R0200NG	16.0	16	16	40	15.5	150	2.0	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...R...NG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095

- Water-soluble cutting fluid is recommended during machining stainless steel.
- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- The down milling is recommended for side milling.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.

Series P--High performance end mills

Four-flute R end mill (short flute structure)

P4S...R...NS

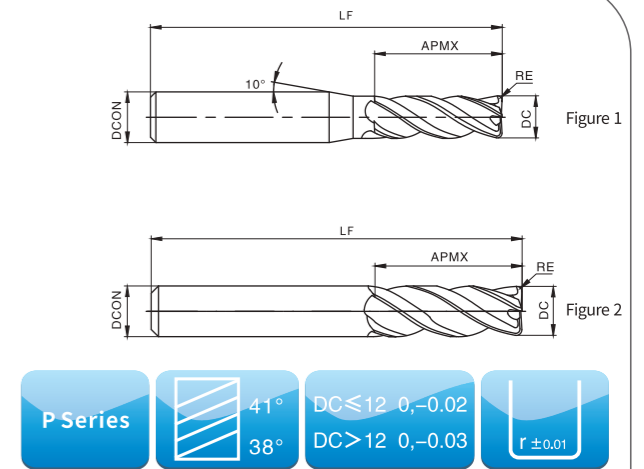

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P4S0300R0020NS-4	3.0	4	8	50	0.2	4	Figure 1	●
P4S0400R0030NS-4	4.0	4	10	50	0.3	4	Figure 2	●
P4S0400R0050NS-4	4.0	4	10	50	0.5	4	Figure 2	●
P4S0300R0020NS	3.0	6	8	50	0.2	4	Figure 1	●
P4S0400R0030NS	4.0	6	10	50	0.3	4	Figure 1	●
P4S0400R0050NS	4.0	6	10	50	0.5	4	Figure 1	●
P4S0500R0050NS	5.0	6	13	50	0.5	4	Figure 1	●
P4S0500R0100NS	5.0	6	13	50	1.0	4	Figure 1	●
P4S0600R0050NS	6.0	6	16	50	0.5	4	Figure 2	●
P4S0600R0100NS	6.0	6	16	50	1.0	4	Figure 2	●
P4S0800R0050NS	8.0	8	20	60	0.5	4	Figure 2	●
P4S0800R0100NS	8.0	8	20	60	1.0	4	Figure 2	●
P4S1000R0050NS	10.0	10	25	75	0.5	4	Figure 2	●
P4S1000R0100NS	10.0	10	25	75	1.0	4	Figure 2	●
P4S1000R0200NS	10.0	10	25	75	2.0	4	Figure 2	●
P4S1000R0300NS	10.0	10	25	75	3.0	4	Figure 2	●
P4S1200R0050NS	12.0	12	30	75	0.5	4	Figure 2	●
P4S1200R0100NS	12.0	12	30	75	1.0	4	Figure 2	●
P4S1200R0200NS	12.0	12	30	75	2.0	4	Figure 2	●
P4S1200R0300NS	12.0	12	30	75	3.0	4	Figure 2	●
P4S1600R0100NS	16.0	16	45	100	1.0	4	Figure 2	●
P4S1600R0200NS	16.0	16	45	100	2.0	4	Figure 2	●
P4S1600R0300NS	16.0	16	45	100	3.0	4	Figure 2	●
P4S2000R0100NS	20.0	20	45	100	1.0	4	Figure 2	●
P4S2000R0200NS	20.0	20	45	100	2.0	4	Figure 2	●
P4S2000R0300NS	20.0	20	45	100	3.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S···R···NS

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	< 220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	—	< 280	120	150	180
	Nodular iron	—	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	—	—	—
	Aluminum alloy	< 530	< 130	—	—	—
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	< 2100	< 400	60	70	80
H	Hardened steel	—	< 54HRC	—	—	—
	Hardened steel	—	54–60HRC	—	—	—
	Hardened steel	—	> 60 HRC	—	—	—


Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)	3.0	4.0	5.0	6.0	8.0	10.0
3.0	3.0	0.9	0.025	2.3	3.0	0.020
4.0	4.0	1.2	0.030	3.0	4.0	0.025
5.0	5.0	1.5	0.035	3.8	5.0	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
12.0	12.0	3.6	0.085	9.0	12.0	0.070
16.0	16.0	4.8	0.115	12.0	16.0	0.095
20.0	20.0	6.0	0.140	15.0	20.0	0.120

- Before slot milling, please reduce the cutting speed (rotating speed) to 80% of the value indicated in the table above, and the feed rate (feed rate) to 60%-80%.
- Please use high-precision machines and cutter shanks, and water-soluble cutting fluids are recommended.
- The down milling is recommended.

Series P--High performance end mills

Four-flute R end mill (necking structure)

P4P···R···NS

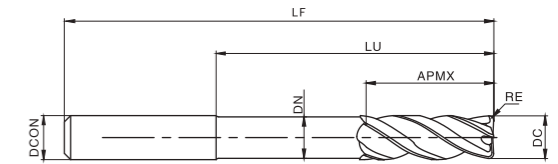

Side machining

Bottom machining

Slot milling

P Series

41°
38°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

r ± 0.01

Type	Dimension (mm)								Inventory
	DC	DCON	APMX	LU	DN	LF	RE	ZEFP	
P4P0600R0050NS	6.0	6	6	18	5.8	75	0.5	4	●
P4P0600R0100NS	6.0	6	6	18	5.8	75	1.0	4	●
P4P0800R0050NS	8.0	8	8	24	7.8	100	0.5	4	●
P4P0800R0100NS	8.0	8	8	24	7.8	100	1.0	4	●
P4P1000R0050NS	10.0	10	10	30	9.6	100	0.5	4	●
P4P1000R0100NS	10.0	10	10	30	9.6	100	1.0	4	●
P4P1000R0200NS	10.0	10	10	30	9.6	100	2.0	4	●
P4P1200R0050NS	12.0	12	12	36	11.5	100	0.5	4	●
P4P1200R0100NS	12.0	12	12	36	11.5	100	1.0	4	●
P4P1200R0200NS	12.0	12	12	36	11.5	100	2.0	4	●
P4P1600R0100NS	16.0	16	16	40	15.5	150	1.0	4	●
P4P1600R0200NS	16.0	16	16	40	15.5	150	2.0	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...R...NS

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-



Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095

- Before slot milling, please reduce the cutting speed (rotating speed) to 80% of the value indicated in the table above, and the feed rate (feed rate) to 60%-80%.
- Please use high-precision machines and cutter shanks, and water-soluble cutting fluids are recommended.
- The down milling is recommended.

Series P--High performance end mills

Four-flute R end mill (short flute structure)

P4S...R...HH

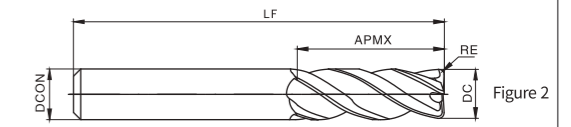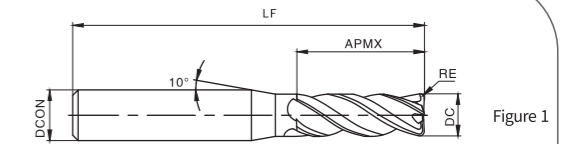

P Series

45°
42°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

45°

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P4S0300R0020HH-4	3.0	4	8	50	0.2	4	Figure 1	●
P4S0400R0030HH-4	4.0	4	10	50	0.3	4	Figure 2	●
P4S0400R0050HH-4	4.0	4	10	50	0.5	4	Figure 2	●
P4S0300R0020HH	3.0	6	8	50	0.2	4	Figure 1	●
P4S0400R0030HH	4.0	6	10	50	0.3	4	Figure 1	●
P4S0400R0050HH	4.0	6	10	50	0.5	4	Figure 1	●
P4S0500R0050HH	5.0	6	13	50	0.5	4	Figure 1	●
P4S0500R0100HH	5.0	6	13	50	1.0	4	Figure 1	●
P4S0600R0050HH	6.0	6	16	50	0.5	4	Figure 2	●
P4S0600R0100HH	6.0	6	16	50	1.0	4	Figure 2	●
P4S0800R0050HH	8.0	8	20	60	0.5	4	Figure 2	●
P4S0800R0100HH	8.0	8	20	60	1.0	4	Figure 2	●
P4S1000R0050HH	10.0	10	25	75	0.5	4	Figure 2	●
P4S1000R0100HH	10.0	10	25	75	1.0	4	Figure 2	●
P4S1000R0200HH	10.0	10	25	75	2.0	4	Figure 2	●
P4S1000R0300HH	10.0	10	25	75	3.0	4	Figure 2	●
P4S1200R0050HH	12.0	12	30	75	0.5	4	Figure 2	●
P4S1200R0100HH	12.0	12	30	75	1.0	4	Figure 2	●
P4S1200R0200HH	12.0	12	30	75	2.0	4	Figure 2	●
P4S1200R0300HH	12.0	12	30	75	3.0	4	Figure 2	●
P4S1600R0100HH	16.0	16	45	100	1.0	4	Figure 2	●
P4S1600R0200HH	16.0	16	45	100	2.0	4	Figure 2	●
P4S1600R0300HH	16.0	16	45	100	3.0	4	Figure 2	●
P4S2000R0100HH	20.0	20	45	100	1.0	4	Figure 2	●
P4S2000R0200HH	20.0	20	45	100	2.0	4	Figure 2	●
P4S2000R0300HH	20.0	20	45	100	3.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙️	⚙️	⚙️		⚙️					⚙️	⚙️	⚙️

⚙️ Fit well ⚙️ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4S···R···HH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	70	100	130
	Hardened steel	-	> 60 HRC	60	70	80


Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	
3.0	3.0	0.9	0.025	
4.0	4.0	1.2	0.030	
5.0	5.0	1.5	0.035	
6.0	6.0	1.8	0.045	
8.0	8.0	2.4	0.060	
10.0	10.0	3.0	0.070	
12.0	12.0	3.6	0.085	
16.0	16.0	4.8	0.115	
20.0	20.0	6.0	0.140	

- Please use high precision machines and cutter shanks.
- Use cutting fluid that is air-cooled or free of producing smoke.
- If the rotating speed of machine is insufficient, decrease the feed rate in the same proportion.

Series P--High performance end mills

Four-flute R end mill (necking structure)

P4P···R···HH

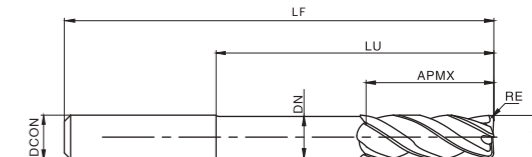

P Series

45°
42°

DC ≤ 12 0, -0.02
DC > 12 0, -0.03

45°

Type	Dimension (mm)								Inventory
	DC	DCON	APMX	LU	DN	LF	RE	ZEFP	
P4P0600R0050HH	6.0	6	6	18	5.8	75	0.5	4	●
P4P0600R0100HH	6.0	6	6	18	5.8	75	1.0	4	●
P4P0800R0050HH	8.0	8	8	24	7.8	100	0.5	4	●
P4P0800R0100HH	8.0	8	8	24	7.8	100	1.0	4	●
P4P1000R0050HH	10.0	10	10	30	9.6	100	0.52	4	●
P4P1000R0100HH	10.0	10	10	30	9.6	100	1.0	4	●
P4P1000R0200HH	10.0	10	10	30	9.6	100	2.0	4	●
P4P1200R0050HH	12.0	12	12	36	11.5	100	0.5	4	●
P4P1200R0100HH	12.0	12	12	36	11.5	100	1.0	4	●
P4P1200R0200HH	12.0	12	12	36	11.5	100	2.0	4	●
P4P1600R0100HH	16.0	16	16	40	15.5	150	1.0	4	●
P4P1600R0200HH	16.0	16	16	40	15.5	150	2.0	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙️	⚙️	⚙️		⚙️					⚙️	⚙️	⚙️

⚙️ Fit well ⚙️ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—P4P...R...HH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	70	100	130
	Hardened steel	-	> 60 HRC	60	70	80



Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	
6.0	6.0	1.8	0.045	
8.0	8.0	2.4	0.060	
10.0	10.0	3.0	0.070	
12.0	12.0	3.6	0.085	
16.0	16.0	4.8	0.115	

- Please use high precision machines and cutter shanks.
- Use cutting fluid that is air-cooled or free of producing smoke.
- If the rotating speed of machine is insufficient, decrease the feed rate in the same proportion.

Series P--High performance end mills

Two-flute ball nose end mill (short flute structure)

P2S...BLG

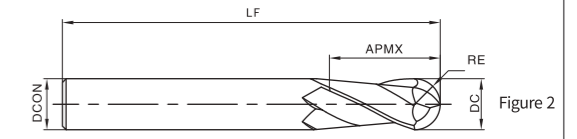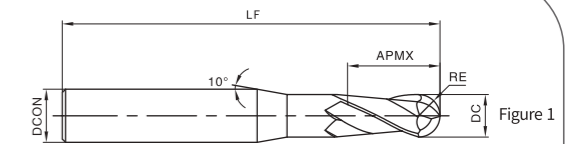

P Series 30° DC ≤ 12 0, -0.02
DC > 12 0, -0.03 R ± 0.005

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P2SR0050BLG-4	1.0	4	2	50	0.5	2	Figure 1	●
P2SR0075BLG-4	1.5	4	3	50	0.75	2	Figure 1	●
P2SR0100BLG-4	2.0	4	4	50	1.0	2	Figure 1	●
P2SR0125BLG-4	2.5	4	5	50	1.25	2	Figure 1	●
P2SR0150BLG-4	3.0	4	6	50	1.5	2	Figure 1	●
P2SR0175BLG-4	3.5	4	8	50	1.75	2	Figure 1	●
P2SR0200BLG-4	4.0	4	8	50	2.0	2	Figure 2	●
P2SR0050BLG	1.0	6	2	50	0.5	2	Figure 1	●
P2SR0075BLG	1.5	6	3	50	0.75	2	Figure 1	●
P2SR0100BLG	2.0	6	4	50	1.0	2	Figure 1	●
P2SR0125BLG	2.5	6	5	50	1.25	2	Figure 1	●
P2SR0150BLG	3.0	6	6	50	1.5	2	Figure 1	●
P2SR0175BLG	3.5	6	8	50	1.75	2	Figure 1	●
P2SR0200BLG	4.0	6	8	50	2.0	2	Figure 1	●
P2SR0250BLG	5.0	6	10	50	2.5	2	Figure 1	●
P2SR0275BLG	5.5	6	12	50	2.75	2	Figure 1	●
P2SR0300BLG	6.0	6	12	50	3.0	2	Figure 2	●
P2SR0350BLG	7.0	8	14	60	3.5	2	Figure 1	●
P2SR0400BLG	8.0	8	16	60	4.0	2	Figure 2	●
P2SR0450BLG	9.0	10	18	75	4.5	2	Figure 1	●
P2SR0500BLG	10.0	10	20	75	5.0	2	Figure 2	●
P2SR0600BLG	12.0	12	24	75	6.0	2	Figure 2	●
P2SR0700BLG	14.0	14	28	75	7.0	2	Figure 2	●
P2SR0800BLG	16.0	16	32	100	8.0	2	Figure 2	●
P2SR1000BLG	20.0	20	40	100	10.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼	☼	

☼ Fit well ☼ Applicable

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 Tiring of small components
 Parting and grooving
 Threading
 Indexable milling
 Solid carbide end mill
 Short hole drill
 Solid carbide drill

Recommended cutting conditions—P2S...BLG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (0.03xDc)	ae (0.03xDc)	fz (mm/z)	
1.0	0.03	0.03	0.012	
1.5	0.045	0.045	0.015	
2.0	0.06	0.06	0.018	
2.5	0.075	0.075	0.020	
3.0	0.09	0.09	0.025	
3.5	0.105	0.105	0.025	
4.0	0.12	0.12	0.030	
5.0	0.15	0.15	0.035	
5.5	0.165	0.165	0.035	
6.0	0.18	0.18	0.045	
7.0	0.21	0.21	0.050	
8.0	0.24	0.24	0.060	
9.0	0.27	0.27	0.065	
10.0	0.30	0.30	0.070	
12.0	0.36	0.36	0.085	
14.0	0.42	0.42	0.100	
16.0	0.48	0.48	0.115	
20.0	0.60	0.60	0.140	

- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Air cooling or spray cooling is recommended.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series P--High performance end mills

Two-flute ball nose end mill (short flute structure)

P2S...BLH

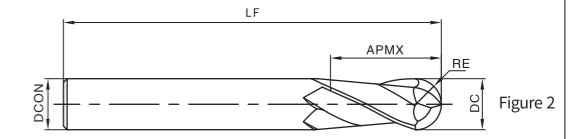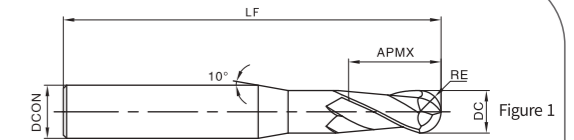

P Series $DC \leq 12 \begin{matrix} 0, -0.02 \\ DC > 12 \end{matrix} \begin{matrix} 0, -0.03 \\ 0, -0.03 \end{matrix}$ $R \pm 0.005$

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P2SR0050BLH-4	1.0	4	2	50	0.5	2	Figure 1	●
P2SR0075BLH-4	1.5	4	3	50	0.75	2	Figure 1	●
P2SR0100BLH-4	2.0	4	4	50	1.0	2	Figure 1	●
P2SR0125BLH-4	2.5	4	5	50	1.25	2	Figure 1	●
P2SR0150BLH-4	3.0	4	6	50	1.5	2	Figure 1	●
P2SR0175BLH-4	3.5	4	8	50	1.75	2	Figure 1	●
P2SR0200BLH-4	4.0	4	8	50	2.0	2	Figure 2	●
P2SR0050BLH	1.0	6	2	50	0.5	2	Figure 1	●
P2SR0075BLH	1.5	6	3	50	0.75	2	Figure 1	●
P2SR0100BLH	2.0	6	4	50	1.0	2	Figure 1	●
P2SR0125BLH	2.5	6	5	50	1.25	2	Figure 1	●
P2SR0150BLH	3.0	6	6	50	1.5	2	Figure 1	●
P2SR0175BLH	3.5	6	8	50	2.0	2	Figure 1	●
P2SR0200BLH	4.0	6	8	50	2.0	2	Figure 1	●
P2SR0250BLH	5.0	6	10	50	2.5	2	Figure 1	●
P2SR0275BLH	5.5	6	12	50	2.75	2	Figure 1	●
P2SR0300BLH	6.0	6	12	50	3.0	2	Figure 2	●
P2SR0350BLH	7.0	8	14	60	3.5	2	Figure 1	●
P2SR0400BLH	8.0	8	16	60	4.0	2	Figure 2	●
P2SR0450BLH	9.0	10	18	75	4.5	2	Figure 1	●
P2SR0500BLH	10.0	10	20	75	5.0	2	Figure 2	●
P2SR0600BLH	12.0	12	24	75	6.0	2	Figure 2	●
P2SR0700BLH	14.0	14	28	75	7.0	2	Figure 2	●
P2SR0800BLH	16.0	16	32	100	8.0	2	Figure 2	●
P2SR1000BLH	20.0	20	40	100	10.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙	⚙	⚙	⚙	⚙			⚙	⚙	⚙	⚙	⚙

⚙ Fit well ⚙ Applicable

Recommended cutting conditions—P2S...BLH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	60	70	80	



Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (0.03xDc)	ae (0.03xDc)	fz (mm/z)	
1.0	0.03	0.03	0.012	
1.5	0.045	0.045	0.015	
2.0	0.06	0.06	0.018	
2.5	0.075	0.075	0.020	
3.0	0.09	0.09	0.025	
3.5	0.105	0.105	0.025	
4.0	0.12	0.12	0.030	
5.0	0.15	0.15	0.035	
5.5	0.165	0.165	0.035	
6.0	0.18	0.18	0.045	
7.0	0.21	0.21	0.050	
8.0	0.24	0.24	0.060	
9.0	0.27	0.27	0.065	
10.0	0.30	0.30	0.070	
12.0	0.36	0.36	0.085	
14.0	0.42	0.42	0.100	
16.0	0.48	0.48	0.115	
20.0	0.60	0.60	0.140	

- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Air cooling or spray cooling is recommended.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series P--High performance end mills

Two-flute ball nose end mill(necking structure)

P2P...BLG

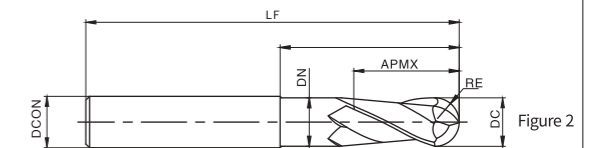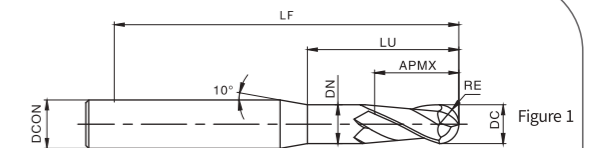

P Series 30° DC ≤ 12 0, -0.02
DC > 12 0, -0.03 R ± 0.005

Type	Dimension (mm)								Pattern	Inventory
	DC	DCON	APMX	LU	DN	LF	RE	ZEFP		
P2PR0050BLG-4	1.0	4	1	2.5	0.95	75	0.5	2	Figure 1	●
P2PR0075BLG-4	1.5	4	2	3	1.45	75	0.75	2	Figure 1	●
P2PR0100BLG-4	2.0	4	2	4	1.95	75	1.0	2	Figure 1	●
P2PR0150BLG-4	3.0	4	3	6	2.85	75	1.5	2	Figure 1	●
P2PR0200BLG-4	4.0	4	4	8	3.85	75	2.0	2	Figure 2	●
P2PR0050BLG	1.0	6	1	2.5	0.95	75	0.5	2	Figure 1	●
P2PR0075BLG	1.5	6	2	3	1.45	75	0.75	2	Figure 1	●
P2PR0100BLG	2.0	6	2	4	1.95	75	1.0	2	Figure 1	●
P2PR0150BLG	3.0	6	3	6	2.85	75	1.5	2	Figure 1	●
P2PR0200BLG	4.0	6	4	8	3.85	75	2.0	2	Figure 1	●
P2PR0250BLG	5.0	6	5	10	4.85	75	2.5	2	Figure 1	●
P2PR0300BLG	6.0	6	6	12	5.8	75	3.0	2	Figure 2	●
P2PR0400BLG	8.0	8	8	16	7.8	100	4.0	2	Figure 2	●
P2PR0500BLG	10.0	10	10	20	9.6	100	5.0	2	Figure 2	●
P2PR0600BLG	12.0	12	12	24	11.5	100	6.0	2	Figure 2	●
P2PR0800BLG	16.0	16	16	32	15.5	150	8.0	2	Figure 2	●
P2PR1000BLG	20.0	20	20	40	19.5	150	10.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀	☀	☀	

☀ Fit well ☀ Applicable

Recommended cutting conditions—P2P...BLG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	-	-	-	



Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (0.03xDc)	ae (0.03xDc)	fz (mm/z)	
1.0	0.03	0.03	0.012	
1.5	0.045	0.045	0.015	
2.0	0.06	0.06	0.018	
3.0	0.09	0.09	0.025	
4.0	0.12	0.12	0.030	
5.0	0.15	0.15	0.035	
6.0	0.18	0.18	0.045	
8.0	0.24	0.24	0.060	
10.0	0.3	0.3	0.070	
12.0	0.36	0.36	0.085	
16.0	0.48	0.48	0.115	
20.0	0.60	0.60	0.140	

- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Air cooling or spray cooling is recommended.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series P--High performance end mills

Two-flute ball nose end mill(necking structure)

P2P...BLH

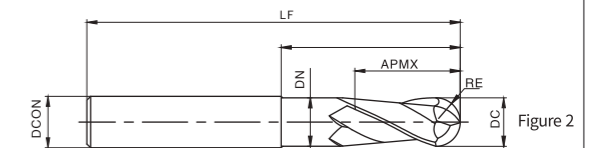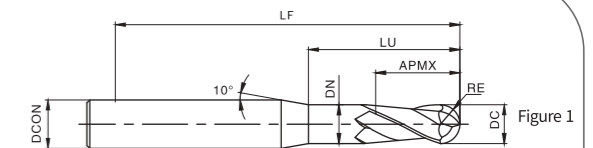

P Series $DC \leq 12 \begin{matrix} 0, -0.02 \\ DC > 12 \end{matrix} \begin{matrix} 0, -0.03 \\ 0, -0.03 \end{matrix}$ $R \pm 0.005$

Type	Dimension (mm)								Pattern	Inventory
	DC	DCON	APMX	LU	DN	LF	RE	ZEFP		
P2PR0050BLH-4	1.0	4	1	2.5	0.95	75	0.5	2	Figure 1	●
P2PR0075BLH-4	1.5	4	2	3	1.45	75	0.75	2	Figure 1	●
P2PR0100BLH-4	2.0	4	2	4	1.95	75	1.0	2	Figure 1	●
P2PR0150BLH-4	3.0	4	3	6	2.85	75	1.5	2	Figure 1	●
P2PR0200BLH-4	4.0	4	4	8	3.85	75	2.0	2	Figure 2	●
P2PR0050BLH	1.0	6	1	2.5	0.95	75	0.5	2	Figure 1	●
P2PR0075BLH	1.5	6	2	3	1.45	75	0.75	2	Figure 1	●
P2PR0100BLH	2.0	6	2	4	1.95	75	1.0	2	Figure 1	●
P2PR0150BLH	3.0	6	3	6	2.85	75	1.5	2	Figure 1	●
P2PR0200BLH	4.0	6	4	8	3.85	75	2.0	2	Figure 1	●
P2PR0250BLH	5.0	6	5	10	4.85	75	2.5	2	Figure 1	●
P2PR0300BLH	6.0	6	6	12	5.8	75	3.0	2	Figure 2	●
P2PR0400BLH	8.0	8	8	16	7.8	100	4.0	2	Figure 2	●
P2PR0500BLH	10.0	10	10	20	9.6	100	5.0	2	Figure 2	●
P2PR0600BLH	12.0	12	12	24	11.5	100	6.0	2	Figure 2	●
P2PR0800BLH	16.0	16	16	32	15.5	150	8.0	2	Figure 2	●
P2PR1000BLH	20.0	20	20	40	19.5	150	10.0	2	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
⚙️	⚙️	⚙️		⚙️					⚙️	⚙️	⚙️

⚙️ Fit well ⚙️ Applicable

Recommended cutting conditions—P2P...BLH

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	150	175	200	
	High-alloyed steel and tool steel	< 1400	100	120	140	
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	60	90	120	
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	90	110	130	
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	-	-	-	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	60	70	80	
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	60	70	80	



Recommended Cutting Parameters				
Machining method	Side milling			
Diameter (mm)	ap (0.03xDc)	ae (0.03xDc)	fz (mm/z)	
1.0	0.03	0.03	0.012	
1.5	0.045	0.045	0.015	
2.0	0.06	0.06	0.018	
3.0	0.09	0.09	0.025	
4.0	0.12	0.12	0.030	
5.0	0.15	0.15	0.035	
6.0	0.18	0.18	0.045	
8.0	0.24	0.24	0.060	
10.0	0.3	0.3	0.070	
12.0	0.36	0.36	0.085	
16.0	0.48	0.48	0.115	
20.0	0.60	0.60	0.140	

- (1) If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- (2) Air cooling or spray cooling is recommended.
- (3) With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- (4) The tool overhang is as short as possible without affecting the use.

Series P--High performance end mills

Four-flute ball nose end mill (short flute structure)

P4S...BNS

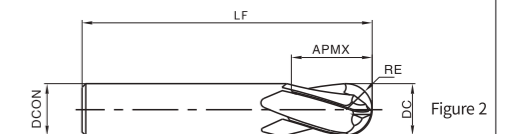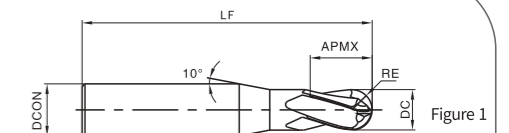

P Series $DC \leq 12$ $0, -0.02$ $H > 10$ $R \pm 0.01$

Type	Dimension (mm)						Pattern	Inventory
	DC	DCON	APMX	LF	RE	ZEFP		
P4SR0150BNS-4	3.0	4	6	50	1.5	4	Figure 1	●
P4SR0200BNS-4	4.0	4	8	50	2.0	4	Figure 2	●
P4SR0150BNS	3.0	6	6	50	1.5	4	Figure 1	●
P4SR0200BNS	4.0	6	8	50	2.0	4	Figure 1	●
P4SR0250BNS	5.0	6	10	50	2.5	4	Figure 1	●
P4SR0300BNS	6.0	6	12	50	3.0	4	Figure 2	●
P4SR0400BNS	8.0	8	16	60	4.0	4	Figure 2	●
P4SR0500BNS	10.0	10	20	75	5.0	4	Figure 2	●
P4SR0600BNS	12.0	12	24	75	6.0	4	Figure 2	●
P4SR0700BNS	14.0	14	28	75	7.0	4	Figure 2	●
P4SR0800BNS	16.0	16	32	100	8.0	4	Figure 2	●
P4SR0900BNS	18.0	18	36	100	9.0	4	Figure 2	●
P4SR1000BNS	20.0	20	40	100	10.0	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

Recommended cutting conditions—P4S···BNS

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	< 240	60	90	120
K Gray cast iron	–	< 280	120	150	180	
	Nodular iron	–	< 320	90	110	130
N Non-ferrous alloy	< 250	< 110	–	–	–	
	Aluminum alloy	< 530	< 130	–	–	
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	< 400	60	70	80
H Hardened steel	–	< 54HRC	–	–	–	
	–	54–60HRC	–	–	–	
	–	> 60 HRC	–	–	–	


Recommended Cutting Parameters						
Machining method	Side milling					
Diameter (mm)	ap (0.1xDc)	ae (0.1xDc)	fz (mm/z)			
3.0	0.3	0.3	0.025			
4.0	0.4	0.4	0.030			
5.0	0.5	0.5	0.035			
6.0	0.6	0.6	0.045			
8.0	0.8	0.8	0.060			
10.0	1.0	1.0	0.070			
12.0	1.2	1.2	0.085			
14.0	1.4	1.4	0.100			
16.0	1.6	1.6	0.115			
18.0	1.8	1.8	0.130			
20.0	2.0	2.0	0.140			

- If the cutting depth is reduced, the rotating speed and feed rate may be increased appropriately.
- Air cooling or spray cooling is recommended.
- With poor rigidity of the machine, if there is vibration or abnormal sound during machining, the cutting speed and feed rate of the above table should be lowered in the same proportion.
- The tool overhang is as short as possible without affecting the use.

Series X--Special end mills

Three-flute corrugated edge flat end mill

X3S···WLN

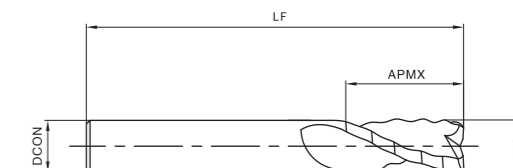

Type	Dimension (mm)					Inventory
	DC	DCON	APMX	LF	ZEFP	
X3S0600WLN	6.0	6	16	50	3	●
X3S0800WLN	8.0	8	20	60	3	●
X3S1000WLN	10.0	10	25	75	3	●
X3S1200WLN	12.0	12	30	75	3	●
X3S1600WLN	16.0	16	45	100	3	●
X3S2000WLN	20.0	20	45	100	3	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54–60HRC	≥60HRC
						☼					

☼ Fit well ☼ Applicable

Recommended cutting conditions—X3S...WLN




Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	-	-	-
	Alloy steel	< 1200	< 350	-	-	-
	High-alloyed steel and tool steel	< 1400	< 380	-	-	-
M	Austenite and ferrite stainless steel	< 680	< 220	-	-	-
	Martensite stainless steel	< 820	< 240	-	-	-
K	Gray cast iron	-	< 280	-	-	-
	Nodular iron	-	< 320	-	-	-
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	150	200	300
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	< 2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	-	-	-
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-

Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.045	4.5	6.0	0.035
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

Series X--Special end mills

Four-flute corrugated edge flat end mill

X4S...WNG

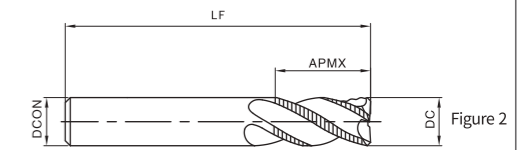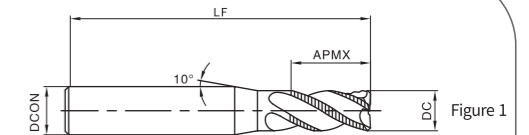

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
X4S0600WNG	6.0	6	16	50	4	Figure 2	●
X4S0700WNG	7.0	8	20	60	4	Figure 1	●
X4S0800WNG	8.0	8	20	60	4	Figure 2	●
X4S0900WNG	9.0	10	22	75	4	Figure 1	●
X4S1000WNG	10.0	10	25	75	4	Figure 2	●
X4S1100WNG	11.0	12	26	75	4	Figure 1	●
X4S1200WNG	12.0	12	30	75	4	Figure 2	●
X4S1600WNG	16.0	16	45	100	4	Figure 2	●
X4S2000WNG	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼					☼		

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—X4S...WNG


Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-	-
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	-	-	-
	Hardened steel	-	> 60 HRC	-	-	-

Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
6.0	6.0	1.8	0.045	4.5	6.0	0.035
7.0	7.0	2.1	0.055	5.3	7.0	0.045
8.0	8.0	2.4	0.060	6.0	8.0	0.050
9.0	9.0	2.7	0.065	6.8	9.0	0.055
10.0	10.0	3.0	0.070	7.5	10.0	0.060
11.0	11.0	3.3	0.080	8.3	11.0	0.065
12.0	12.0	3.6	0.085	9.0	12.0	0.070
16.0	16.0	4.8	0.115	12.0	16.0	0.095
20.0	20.0	6.0	0.140	15.0	20.0	0.120

Series X--Special end mills

Four-flute flat end mill

X4S...HG

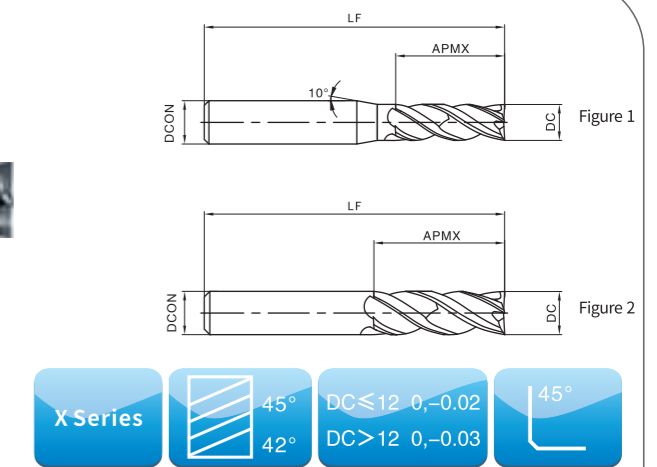

Type	Dimension (mm)					Pattern	Inventory
	DC	DCON	APMX	LF	ZEFP		
X4S0400HG	4.0	6	11	50	4	Figure 1	●
X4S0500HG	5.0	6	13	50	4	Figure 1	●
X4S0600HG	6.0	6	16	50	4	Figure 2	●
X4S0800HG	8.0	8	20	60	4	Figure 2	●
X4S1000HG	10.0	10	25	75	4	Figure 2	●
X4S1200HG	12.0	12	30	75	4	Figure 2	●
X4S1600HG	16.0	16	45	100	4	Figure 2	●
X4S2000HG	20.0	20	45	100	4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼	☼	

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—X4S...HG


Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P	Carbon steel	< 600	< 230	180	210	240
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M	Austenite and ferrite stainless steel	< 680	<220	80	110	140
	Martensite stainless steel	< 820	< 240	60	90	120
K	Gray cast iron	-	< 280	120	150	180
	Nodular iron	-	< 320	90	110	130
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Heat resistant super alloys	< 3300	< 350	40	50	60
	Titanium alloy	<2100	< 400	60	70	80
H	Hardened steel	-	< 54HRC	90	120	150
	Hardened steel	-	54-60HRC	70	100	130
	Hardened steel	-	> 60 HRC	-	-	-

Recommended Cutting Parameters						
Machining method	Side milling			Slot milling		
	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
Diameter (mm)						
4.0	4.0	1.2	0.030	3.0	4.0	0.025
5.0	5.0	1.5	0.035	3.8	5.0	0.030
6.0	6.0	1.8	0.045	4.5	6.0	0.035
8.0	8.0	2.4	0.060	6.0	8.0	0.050
10.0	10.0	3.0	0.070	7.5	10.0	0.060
12.0	12.0	3.6	0.085	9.0	12.0	0.070
16.0	16.0	4.8	0.115	12.0	16.0	0.095
20.0	20.0	6.0	0.140	15.0	20.0	0.120

Series X--Special end mills

Four-flute R end mill

X4S...R...HG

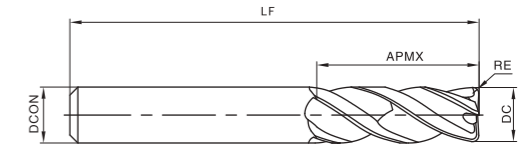

X Series

45° / 42°

DC ≤ 12 0, -0.02

DC > 12 0, -0.03

45°

Type	Dimension (mm)						Inventory
	DC	DCON	APMX	LF	RE	ZEFP	
X4S0600R0050HG	6.0	6	16	50	0.5	4	●
X4S0600R0100HG	6.0	6	16	50	1.0	4	●
X4S0800R0050HG	8.0	8	20	60	0.5	4	●
X4S0800R0100HG	8.0	8	20	60	1.0	4	●
X4S1000R0050HG	10.0	10	25	75	0.5	4	●
X4S1000R0100HG	10.0	10	25	75	1.0	4	●
X4S1000R0200HG	10.0	10	25	75	2.0	4	●
X4S1200R0050HG	12.0	12	30	75	0.5	4	●
X4S1200R0100HG	12.0	12	30	75	1.0	4	●
X4S1200R0200HG	12.0	12	30	75	2.0	4	●
X4S1600R0100HG	16.0	16	45	100	1.0	4	●
X4S1600R0200HG	16.0	16	45	100	2.0	4	●
X4S1600R0300HG	16.0	16	45	100	3.0	4	●
X4S2000R0100HG	20.0	20	45	100	1.0	4	●
X4S2000R0200HG	20.0	20	45	100	2.0	4	●
X4S2000R0300HG	20.0	20	45	100	3.0	4	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼	☼	☼	

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Recommended cutting conditions—X4S··R··HG

Recommended Cutting Speed						
Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum	Recommendation	Maximum	
P Carbon steel	< 600	< 230	180	210	240	
	Alloy steel	< 1200	< 350	150	175	200
	High-alloyed steel and tool steel	< 1400	< 380	100	120	140
M Austenite and ferrite stainless steel	< 680	<220	80	110	140	
	Martensite stainless steel	< 820	< 240	60	90	120
K Gray cast iron	-	< 280	120	150	180	
	Nodular iron	-	< 320	90	110	130
N Non-ferrous alloy	< 250	< 110	-	-	-	
	Aluminum alloy	< 530	< 130	-	-	-
S Heat resistant super alloys	< 3300	< 350	40	50	60	
	Titanium alloy	<2100	< 400	60	70	80
H Hardened steel	-	< 54HRC	90	120	150	
	-	54-60HRC	70	100	130	
	-	> 60 HRC	-	-	-	

Recommended Cutting Parameters							
Machining method	Side milling			Slot milling			
	Diameter (mm)	ap (1xDc)	ae (0.3xDc)	fz (mm/z)	ap (0.75xDc)	ae (1xDc)	fz (mm/z)
	6.0	6.0	1.8	0.025	4.5	6.0	0.020
	8.0	8.0	2.4	0.060	6.0	8.0	0.050
	10.0	10.0	3.0	0.070	7.5	10.0	0.060
	12.0	12.0	3.6	0.085	9.0	12.0	0.070
	16.0	16.0	4.8	0.115	12.0	16.0	0.095
	20.0	20.0	6.0	0.140	15.0	20.0	0.120

Non-standard Customization of Solid Carbide End Mills

Customized tools: a good solution for process optimization and efficiency improvement

Client name: No.68 Chuangye 2nd RD., Lusong District, Zhuzhou, Hunan, P.R.China
 Fax: Tel.: 0731-28216690
 Tel.: Fax: 0731-22286653
 E-mail: zzhrhj@163.com
 E-MAIL: Postal code: 412000
 Website: www.huareal.com.cn

Tool series

Series B Basic Type
 Series P High Performance Type
 Series X Special Type
 Others

Tool type

Flat end mill
 Chamfered flat end mill
 Radius mill
 Ball nose mill
 Flat end taper mill
 Ball nose taper mill
 Others

Shank type

Straight shank
 Shank with flat DIN 6535HB
 Straight shank DIN 6535HA
 Others

Tool information

Application

Type of machine

Internal coolant (Yes/No)

Cooling type

Machining method

Clamping form

Cutting speed (Vc)

Feed per revolution (Fz)

Cutting depth (Ap)

Cutting width (Ae)

Notes (Sketches or drawings of machined parts will be needed if the above workpiece types cannot be described in detail):

Order quantity: Pieces Expected delivery date: MM DD YYYY

Date: Signature:

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 General turning

A General turning
 B Indexable milling
 C Short hole drill
 Solid carbide drill
 Solid carbide end mill
 Threading
 Parting and grooving
 Turning of small components
 General turning

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill



C Drilling

Indexable short hole drills

- ◆ Overview of drilling tools C-1
- ◆ Code key of indexable short hole drilling tools C-2
- ◆ Code key of indexable short hole drilling inserts C-3
- ◆ Indexable short hole drilling tools C-5
- ◆ Indexable short hole drilling inserts C-11
- ◆ Recommended cutting parameters for indexable short hole drilling tools C-12
- ◆ Technical information of indexable short hole drilling tools C-13


- Tool shape
- Tool type

Indexable short hole drilling

HD01 2D Series



Tool specification column
(including model, basic size, applicable inserts and accessories)

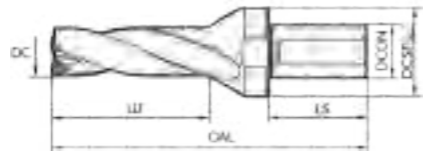


Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD01-2D-440-S40	○	44	40	60	70	91	WCMX080412-DX	M40110	HTT151P	
HD01-2D-450-S40	○	45	40	60	70	93				
HD01-2D-460-S40	○	46	40	60	70	95				
HD01-2D-470-S40	○	47	40	60	70	97				
HD01-2D-480-S40	○	48	40	70	70	99				
HD01-2D-490-S40	○	49	40	70	70	101				
HD01-2D-500-S40	○	50	40	70	70	103				

● Running stock ○ Make-to-order

Selection guidance of indexable short hole drilling inserts

Indexable short hole drilling insert

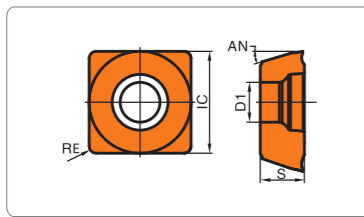

Workpiece material	Working condition: ● Stable ● Average ✱ Tough									
	P	M	K	N	S	●	●	●	●	●
P Steel	●	●	●	●	●	●	●	●	●	●
M Stainless steel						●	●	●	●	●
K Cast iron						●	●	●	●	●
N Non-ferrous metal										
S Heat resistant super alloys Titanium alloy										

Insert shape	Type	Dimension (mm)					CVD				PVD			
		IC	S	RE	D1	AN	HR8115	HR8125	HR8225	HR5110	HR5120	HR5130	HR712	HR7225
	SPMG050204-DX	5.00	2.38	0.4	2.25	14°	☆				☆	★		
	SPMG060204-DX	6.00	2.38	0.4	2.61	14°	☆				☆	★		
	SPMG07T308-DX	7.94	3.97	0.8	2.85	15.5°	☆				☆	★		
	SPMG090408-DX	9.80	4.30	0.8	4.05	17.5°	☆				☆	★		
	SPMG110408-DX	11.50	4.80	0.8	4.50	16.5°	☆				☆	★		

★ Recommended grade ☆ Available grade

Insert specification column
(including model, basic size and grade)

- Insert shape
- Insert type

Solid carbide drills

- ◆ Code key of solid carbide drills C-18
- ◆ Specification and parameters recommendation of solid carbide drills C-19
- ◆ Technical information of solid carbide drill C-71
- ◆ Non-standard customization of solid carbide drills C-73
- ◆ Non-standard customization of solid carbide reamers C-74



Overview of drilling tools

Tool type	Tool series	Size range (mm)	Tool shape	Cooling method	Applicable inserts	Workpiece material						Page
						P	M	K	N	S	H	
Indexable short hole drill	HD01	Ø16–50		Internal cooling	WCMX□□	*	*	*		*		C5
	HD02	Ø16–42		Internal cooling	SPMG□□	*	*	*		*		C9
Series Solid carbide drill	BD03	Ø3–20		External cooling	/	*	*	*		*		C19
	BD03C	Ø3–20		Internal cooling	/	*	*	*		*		C27
	BD05	Ø3–20		External cooling	/	*	*	*		*		C35
	BD05C	Ø3–20		Internal cooling	/	*	*	*		*		C43
	BD08C	Ø3–20		Internal cooling	/	*	*	*		*		C51

*Fit well ✨Applicable

Overview of drilling tools

Tool type	Tool series	Size range (mm)	Tool shape	Cooling method	Applicable inserts	Workpiece material						Page
						P	M	K	N	S	H	
Series Solid carbide drills	XD12C	Ø3–20		Internal cooling	/	*	*	*		*		C57
	XD20C	Ø3–14		Internal cooling	/	*	*	*		*		C65
	XD30C	Ø3–10		Internal cooling	/	*	*	*		*		C67

*Fit well ✨Applicable

Code key of indexable short hole drilling tools

HD 01 - 2D - 150 - S 20

① ② ③ ④ ⑤ ⑥

① Short hole drilling series

② Series number

③ Length-diameter ratio

④ Tool diameter

⑤ Shank type

⑥ Sizes of tool installation parts

01	With WC insert
02	With SP insert

2D	Length-diameter ratio: 2
3D	Length-diameter ratio: 3
5D	Length-diameter ratio: 5

150	15mm
200	20mm
250	25mm
...	...

S	Shank with flat
---	-----------------

20	20mm
25	25mm
...	...

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C1

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

C2

Code key of indexable short hole drilling inserts

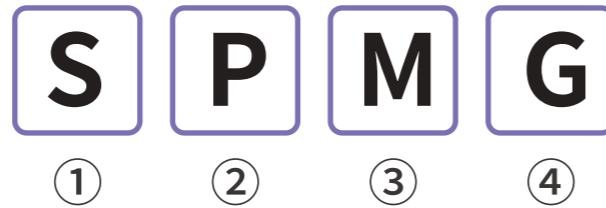


① Shape code

S	
W	

③ Tolerance (mm)

Class	Corner height (m)	Inscribed circle (φD)	Thickness (S)	Class	Corner height (m)	Inscribed circle (φD)	Thickness (S)
A	± 0.005	± 0.025	± 0.025	J	± 0.005	± 0.025	± 0.025
F	± 0.005	± 0.013	± 0.025	K	± 0.005	± 0.013	± 0.025
C	± 0.013	± 0.025	± 0.025	L	± 0.013	± 0.025	± 0.025
H	± 0.013	± 0.013	± 0.025	M	± 0.013	± 0.013	± 0.025
E	± 0.025	± 0.025	± 0.025	N	± 0.025	± 0.025	± 0.025
G	± 0.025	± 0.025	± 0.13	U	± 0.025	± 0.025	± 0.13

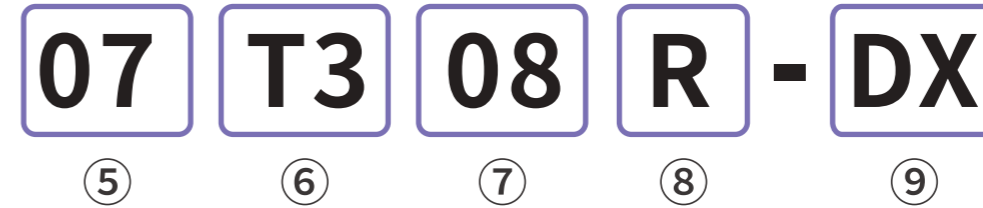

⑤ Cutting edge length

Code	Insert shape	
	W	S
03	3.8	
04	4.3	
05	5.4	5.0
06	6.5	6.0
07		7.94
08	8.7	
09		9.8
11		11.5

⑥ Insert thickness

Code	Thickness (mm)	Code	Thickness (mm)
00	0.79	05	5.96
T0	0.99	T5	5.95
01	1.59	06	6.35
T1	1.98	T6	6.75
02	2.38	07	7.94
T2	2.58	09	9.52
03	3.18	T9	11.11
T3	3.97	11	12.70
04	4.76	12	
T4	4.96		

② Clearance angle major

Code	Clearance angle	Code	Clearance angle
A		B	
C		D	
E		F	
G		N	
P		O	Others

④ Chip breaker and clamping form

Code	Hole	Chip breaker	Chip breaker	Code	Hole	Chip breaker	Chip breaker
B	Y	N/A		N	N/A	N/A	
H	Y	Single-sided		R	N/A	Single-sided	
C	Y	N/A		F	N/A	Double-sided	
J	Y	Double-sided		A	Y	N/A	
W	Y	N/A		M	Y	Single-sided	
T	Y	Single-sided		G	Y	Double-sided	
Q	Y	N/A		X	---	---	Exception
U	Y	Double-sided					

⑦ Corner radius


Code	Description
04	0.4mm
08	0.8mm
12	1.2mm

⑧ Cutting direction

Code	Direction
R	Right
L	Left
N	Two-way

⑨ Chip breaker code

Code	Geometry
DX	Dx Geometry

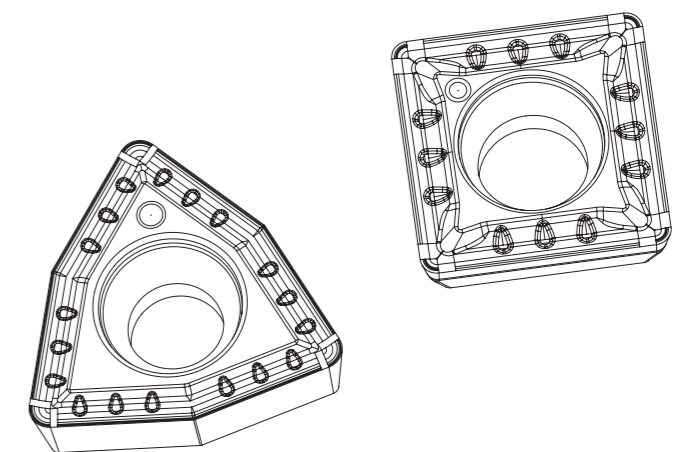


A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill
 C3

A General turning
 Tiring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill
 C4

Indexable short hole drilling

HD01 2D Series

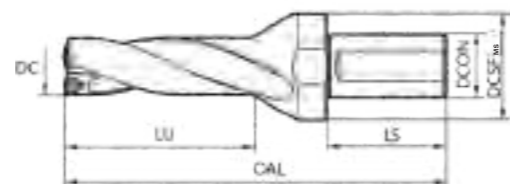


Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD01-2D-160-S25	●	16	25	32	56	35	WCMX030204-DX WCMX030208-DX	M25065	HFT08IP	
HD01-2D-170-S25	○	17	25	32	56	37				
HD01-2D-180-S25	○	18	25	32	56	39				
HD01-2D-190-S25	○	19	25	32	56	41	WCMX040204-DX WCMX040208-DX	M25065	HFT08IP	
HD01-2D-200-S25	●	20	25	32	56	43				
HD01-2D-210-S25	○	21	25	45	56	45				
HD01-2D-220-S25	○	22	25	45	56	47	WCMX050308-DX	M30070	HFT09IP	
HD01-2D-230-S25	○	23	25	45	56	49				
HD01-2D-240-S25	○	24	25	45	56	51				
HD01-2D-250-S25	●	25	25	45	56	53	WCMX06T308-DX	M35084	HTT10IP	
HD01-2D-260-S32	○	26	32	55	60	55				
HD01-2D-270-S32	○	27	32	55	60	57				
HD01-2D-280-S32	○	28	32	55	60	59	WCMX080412-DX	M40110	HTT15IP	
HD01-2D-290-S32	○	29	32	55	60	61				
HD01-2D-300-S32	●	30	32	55	60	63				
HD01-2D-310-S40	○	31	40	60	70	65	WCMX080412-DX	M40110	HTT15IP	
HD01-2D-320-S40	○	32	40	60	70	67				
HD01-2D-330-S40	○	33	40	60	70	69				
HD01-2D-340-S40	○	34	40	60	70	71	WCMX080412-DX	M40110	HTT15IP	
HD01-2D-350-S40	○	35	40	60	70	73				
HD01-2D-360-S40	○	36	40	60	70	75				
HD01-2D-370-S40	○	37	40	60	70	77	WCMX080412-DX	M40110	HTT15IP	
HD01-2D-380-S40	○	38	40	60	70	79				
HD01-2D-390-S40	○	39	40	60	70	81				
HD01-2D-400-S40	●	40	40	60	70	83	WCMX080412-DX	M40110	HTT15IP	
HD01-2D-410-S40	○	41	40	60	70	85				
HD01-2D-420-S40	○	42	40	60	70	87				
HD01-2D-430-S40	○	43	40	60	70	89				

● Standing inventory ○ Make-to-order

Indexable short hole drilling

HD01 2D Series

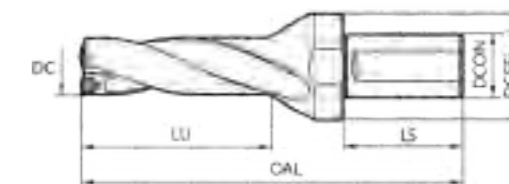

Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD01-2D-440-S40	○	44	40	60	70	91	WCMX080412-DX	M40110	HTT15IP	
HD01-2D-450-S40	○	45	40	60	70	93				
HD01-2D-460-S40	○	46	40	60	70	95				
HD01-2D-470-S40	○	47	40	60	70	97				
HD01-2D-480-S40	○	48	40	70	70	99				
HD01-2D-490-S40	○	49	40	70	70	101				
HD01-2D-500-S40	○	50	40	70	70	103				

● Standing inventory ○ Make-to-order

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C5

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C


Short hole drill

Solid carbide drill

C6

Indexable short hole drilling

HD01 3D Series

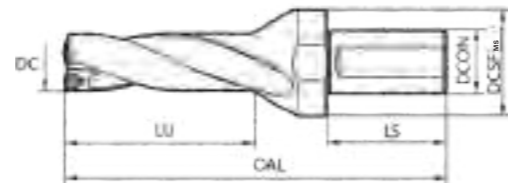


Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD01-3D-160-S25	●	16	25	32	56	52	WCMX030204-DX WCMX030208-DX	M25065	HFT08IP	
HD01-3D-170-S25	○	17	25	32	56	55				
HD01-3D-180-S25	○	18	25	32	56	58				
HD01-3D-190-S25	○	19	25	32	56	61				
HD01-3D-200-S25	●	20	25	32	56	64	WCMX040204-DX WCMX040208-DX	M25065	HFT08IP	
HD01-3D-210-S25	○	21	25	45	56	67				
HD01-3D-220-S25	○	22	25	45	56	70				
HD01-3D-230-S25	○	23	25	45	56	73				
HD01-3D-240-S25	○	24	25	45	56	76	WCMX050308-DX	M30070	HFT09IP	
HD01-3D-250-S25	●	25	25	45	56	79				
HD01-3D-260-S32	○	26	32	55	60	83				
HD01-3D-270-S32	○	27	32	55	60	86				
HD01-3D-280-S32	○	28	32	55	60	89	WCMX06T308-DX	M35084	HTT10IP	
HD01-3D-290-S32	○	29	32	55	60	92				
HD01-3D-300-S32	●	30	32	55	60	95				
HD01-3D-310-S40	○	31	40	60	70	98				
HD01-3D-320-S40	○	32	40	60	70	101	WCMX080412-DX	M40110	HTT15IP	
HD01-3D-330-S40	○	33	40	60	70	104				
HD01-3D-340-S40	○	34	40	60	70	107				
HD01-3D-350-S40	○	35	40	60	70	110				
HD01-3D-360-S40	○	36	40	60	70	113	WCMX080412-DX	M40110	HTT15IP	
HD01-3D-370-S40	○	37	40	60	70	116				
HD01-3D-380-S40	○	38	40	60	70	119				
HD01-3D-390-S40	○	39	40	60	70	122				
HD01-3D-400-S40	●	40	40	60	70	125	WCMX080412-DX	M40110	HTT15IP	
HD01-3D-410-S40	○	41	40	60	70	128				
HD01-3D-420-S40	○	42	40	60	70	131				
HD01-3D-430-S40	○	43	40	60	70	134				

● Standing inventory ○ Make-to-order

Indexable short hole drilling

HD01 3D Series

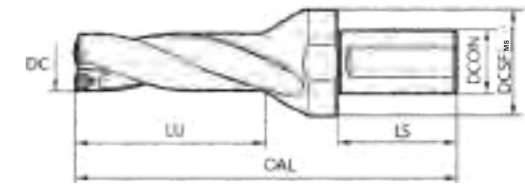

Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD01-3D-440-S40	○	44	40	60	70	137	WCMX080412-DX	M40110	HTT15IP	
HD01-3D-450-S40	○	45	40	60	70	140				
HD01-3D-460-S40	○	46	40	60	70	143				
HD01-3D-470-S40	○	47	40	60	70	146				
HD01-3D-480-S40	○	48	40	60	70	149				
HD01-3D-490-S40	○	49	40	60	70	152				
HD01-3D-500-S40	○	50	40	60	70	155				

● Standing inventory ○ Make-to-order

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C7

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C8

Indexable short hole drilling

HD02 2D Series



Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD02-2D-160-S20	●	16	20	25	50	35	102	SPMG050204-DX	M20043	HFT06IP
HD02-2D-170-S20	○	17	20	25	50	37	104	SPMG060204-DX	M22055	HFT07IP
HD02-2D-180-S25	○	18	25	32	56	39	113			
HD02-2D-190-S25	○	19	25	32	56	41	115			
HD02-2D-200-S25	●	20	25	32	56	43	117			
HD02-2D-210-S25	○	21	25	32	56	45	119	SPMG07T308-DX	M25074	HFT07IP
HD02-2D-220-S25	○	22	25	32	56	47	121			
HD02-2D-230-S25	○	23	25	32	56	49	123			
HD02-2D-240-S25	○	24	25	32	56	51	125			
HD02-2D-250-S25	●	25	25	32	56	53	127	SPMG090408-DX	M35084	HTT10IP
HD02-2D-260-S32	○	26	32	32	56	55	129			
HD02-2D-270-S32	○	27	32	32	56	57	131			
HD02-2D-280-S32	○	28	32	37	60	59	139			
HD02-2D-290-S32	○	29	32	37	60	61	141	SPMG110408-DX	M40110	HTT15IP
HD02-2D-300-S32	●	30	32	37	60	63	143			
HD02-2D-310-S40	○	40	32	37	60	65	145			
HD02-2D-320-S40	○	40	32	37	60	67	147			
HD02-2D-330-S40	○	40	32	37	60	69	149	SPMG110408-DX	M40110	HTT15IP
HD02-2D-340-S40	○	40	32	37	60	69	149			
HD02-2D-350-S40	○	40	32	37	60	69	149			
HD02-2D-360-S40	○	40	32	37	60	69	149			
HD02-2D-370-S40	○	40	32	37	60	69	149	SPMG110408-DX	M40110	HTT15IP
HD02-2D-380-S40	○	40	32	37	60	69	149			
HD02-2D-390-S40	○	40	32	37	60	69	149			
HD02-2D-400-S40	●	40	40	47	70	83	178			
HD02-2D-410-S40	○	41	40	47	70	85	180			

● Standing inventory ○ Make-to-order

Indexable short hole drilling

HD02 3D Series




Tool model	Inventory	Dimension (mm)						Applicable inserts	Screw	Wrench
		DC	DCON	DCSF _{MS}	LS	LU	OAL			
HD02-3D-160-S20	●	16	20	25	50	51	117	SPMG050204DG-DX	M20043	HFT06IP
HD02-3D-170-S20	○	17	20	25	50	54	120	SPMG060204DG-DX	M22055	HFT07IP
HD02-3D-180-S25	○	18	25	32	56	57	131			
HD02-3D-190-S25	○	19	25	32	56	60	134			
HD02-3D-200-S25	●	20	25	32	56	63	137			
HD02-3D-210-S25	○	21	25	32	56	66	140	SPMG07T308DG-DX	M25074	HFT07IP
HD02-3D-220-S25	○	22	25	32	56	69	143			
HD02-3D-230-S25	○	23	25	32	56	72	147			
HD02-3D-240-S25	○	24	25	32	56	75	150			
HD02-3D-250-S25	●	25	25	32	56	78	153	SPMG090408DG-DX	M35084	HTT10IP
HD02-3D-260-S32	○	26	32	32	56	81	156			
HD02-3D-270-S32	○	27	32	32	56	84	160			
HD02-3D-280-S32	○	28	32	37	60	87	169			
HD02-3D-290-S32	○	29	32	37	60	90	172	SPMG110408DG-DX	M40110	HTT15IP
HD02-3D-300-S32	●	30	32	37	60	93	175			
HD02-3D-310-S40	○	31	40	37	60	96	178			
HD02-3D-320-S40	○	32	40	37	60	99	181			
HD02-3D-330-S40	○	33	40	37	60	102	184	SPMG110408DG-DX	M40110	HTT15IP
HD02-3D-340-S40	○	34	40	47	70	105	200			
HD02-3D-350-S40	○	35	40	47	70	108	203			
HD02-3D-360-S40	○	36	40	47	70	111	206			
HD02-3D-370-S40	○	37	40	47	70	114	209	SPMG110408DG-DX	M40110	HTT15IP
HD02-3D-380-S40	○	38	40	47	70	117	212			
HD02-3D-390-S40	○	39	40	47	70	120	215			
HD02-3D-400-S40	●	40	40	47	70	123	218			
HD02-3D-410-S40	○	41	40	47	70	126	221			

● Standing inventory ○ Make-to-order

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

A General turning
Turing of small components
Parting and grooving
Threading
B Indexable milling
Solid carbide end mill
C Short hole drill
Solid carbide drill

Indexable short hole drilling insert

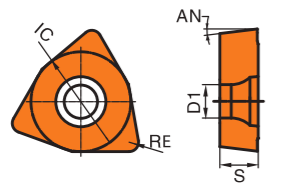


Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel (P)	Stainless steel (M)	Cast iron (K)	Non-ferrous metal (N)	Heat resistant super alloys Titanium alloy (S)
Steel (P)	●	●	●	●	●
Stainless steel (M)		●	●	●	●
Cast iron (K)			●	●	●
Non-ferrous metal (N)				●	●
Heat resistant super alloys Titanium alloy (S)					●

Insert shape	Type	Dimension (mm)					CVD			PVD				
		IC	S	RE	D1	AN	HR8115	HR8125	HR8225	HR5110	HR5120	HR5130	HR7125	HR7225
	WCMX030204-DX	5.56	2.38	0.4	2.55	7°	☆				☆	★		
	WCMX030208-DX	5.56	2.38	0.8	2.55	7°	☆				☆	★		
	WCMX040204-DX	6.35	2.38	0.4	2.80	7°	☆				☆	★		
	WCMX040208-DX	6.35	2.38	0.8	2.80	7°	☆				☆	★		
	WCMX050308-DX	7.94	3.18	0.8	3.20	7°	☆				☆	★		
	WCMX06T308-DX	9.525	3.97	0.8	3.70	7°	☆				☆	★		
	WCMX080412-DX	12.70	4.76	1.2	4.30	7°	☆				☆	★		

★ Recommended grade ☆ Available grade

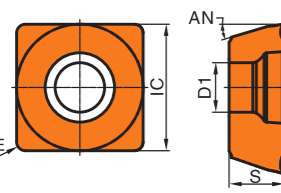

Working condition: ● Stable ● Average ■ Tough

Workpiece material	Steel (P)	Stainless steel (M)	Cast iron (K)	Non-ferrous metal (N)	Heat resistant super alloys Titanium alloy (S)
Steel (P)	●	●	●	●	●
Stainless steel (M)		●	●	●	●
Cast iron (K)			●	●	●
Non-ferrous metal (N)				●	●
Heat resistant super alloys Titanium alloy (S)					●

Insert shape	Type	Dimension (mm)					CVD			PVD				
		IC	S	RE	D1	AN	HR8115	HR8125	HR8225	HR5110	HR5120	HR5130	HR7125	HR7225
	SPMG050204-DX	5.00	2.38	0.4	2.25	14°	☆				☆	★		
	SPMG060204-DX	6.00	2.38	0.4	2.61	14°	☆				☆	★		
	SPMG07T308-DX	7.94	3.97	0.8	2.85	15.5°	☆				☆	★		
	SPMG090408-DX	9.80	4.30	0.8	4.05	17.5°	☆				☆	★		
	SPMG110408-DX	11.50	4.80	0.8	4.50	16.5°	☆				☆	★		

★ Recommended grade ☆ Available grade

Recommended cutting parameters for indexable short hole drilling

ISO	Workpiece material	Brinell hardness	Cutting speed vc m/min	Feed rate fn (mm/r)						
				Diameter of drill bit (mm)						
				16-20	20-25	25-30	30-35	35-50		
P	Unalloyed steel	C ≤ 0.10%	125	70-200	0.04-0.09	0.07-0.11	0.10-0.21	0.18-0.27	0.25-0.35	
		0.10 < C ≤ 0.25%	125	70-180	0.04-0.09	0.07-0.11	0.10-0.21	0.18-0.27	0.25-0.35	
		0.25 < C ≤ 0.55%	150	70-150	0.04-0.09	0.07-0.11	0.10-0.21	0.18-0.27	0.25-0.35	
	High carbon Steel	Carbon tool steel	170	70-130	0.04-0.09	0.07-0.11	0.10-0.21	0.18-0.27	0.25-0.35	
		Unalloyed	210	70-130	0.04-0.09	0.07-0.11	0.10-0.21	0.18-0.27	0.25-0.35	
	Low-alloyed steel	Quenching and tempering	180	80-180	0.04-0.08	0.05-0.10	0.08-0.22	0.15-0.28	0.23-0.38	
		Quenching and tempering	275	70-150	0.04-0.08	0.05-0.10	0.08-0.22	0.15-0.28	0.23-0.38	
	High-alloyed steel	Annealing	350	70-150	0.04-0.08	0.05-0.10	0.08-0.22	0.15-0.28	0.23-0.38	
		Quenching and tempering	200	55-110	0.04-0.08	0.05-0.10	0.08-0.22	0.15-0.28	0.23-0.38	
	Cast steel	Non-alloyed	325	55-110	0.04-0.08	0.05-0.10	0.08-0.22	0.15-0.28	0.23-0.38	
Low alloy (alloy composition < 5%)		180	55-110	0.04-0.08	0.05-0.09	0.07-0.20	0.16-0.27	0.22-0.36		
M	Stainless steel	Unquenched/ferrite/martensite	200	80-180	0.04-0.09	0.06-0.11	0.10-0.20	0.17-0.29	0.25-0.38	
		Austenite, quenching	200	80-180	0.04-0.09	0.06-0.10	0.10-0.20	0.17-0.29	0.25-0.38	
		Austenite, precipitation hardening stainless steel (PH stainless steel)	300	80-180	0.04-0.09	0.06-0.10	0.10-0.20	0.17-0.25	0.21-0.33	
		Austenite-ferrite, duplex stainless steel	230	80-180	0.04-0.09	0.06-0.10	0.10-0.20	0.17-0.25	0.21-0.33	
K	Malleable cast iron	Ferrite	200	100-200	0.04-0.10	0.10-0.15	0.11-0.22	0.17-0.29	0.25-0.38	
		Pearlite	260	100-200	0.04-0.10	0.10-0.15	0.11-0.22	0.17-0.29	0.25-0.38	
	Grey cast iron	Low tensile strength	180	120-220	0.04-0.10	0.10-0.15	0.11-0.22	0.17-0.29	0.25-0.38	
		High tensile strength/austenite	245	120-220	0.04-0.10	0.10-0.15	0.11-0.22	0.17-0.29	0.25-0.38	
Nodular cast iron	Ferrite	155	100-200	0.04-0.10	0.10-0.15	0.11-0.22	0.17-0.29	0.25-0.38		
	Pearlite	265	100-200	0.04-0.10	0.10-0.15	0.11-0.22	0.17-0.29	0.25-0.38		
Compacted graphite iron	GGV (CGI)	230								
N	Wrought aluminum alloy	Non-aging	30	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33	
		Ageable and aged	100	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33	
	Foundry aluminum alloy	≤ 12% silicon, non-aging	75	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33	
		≤ 12% silicon, ageable and aged	90	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33	
		> 12% silicon, non-aging	130	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33	
	Magnesium alloy		70							
Copper and copper alloy (Bronze/brass)	Non-alloyed, electrolytic copper	100	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33		
	Brass, bronze, red brass	90	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33		
	Copper alloy, short chip	110	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33		
	Ampco alloy of high strength	300	150-300	0.05-0.12	0.09-0.16	0.15-0.23	0.19-0.27	0.21-0.33		
S	Iron-based alloy	Iron-based	200	Annealing	10-55	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30
		Aged		280	10-55	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30
	Nickel-based or cobalt-based	Annealing	250	10-55	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30	
		Aged	350	10-55	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30	
Titanium alloy		Casting	320	10-55	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30	
		Pure titanium	200	30-60	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30	
		α phase alloy	375	30-60	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30	
		α and β phase alloys, aged	375	30-60	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30	
β phase alloy	410	30-60	0.07-0.10	0.09-0.14	0.13-0.20	0.19-0.25	0.23-0.30			

A General turning
 B Tiring of small components
 C Threading Parting and grooving
 D Threading Parting and grooving
 E Threading Parting and grooving
 F Indexable milling
 G Solid carbide end mill
 H Solid carbide end mill
 I Short hole drill
 J Solid carbide drill

A General turning
 B Tiring of small components
 C Threading Parting and grooving
 D Threading Parting and grooving
 E Threading Parting and grooving
 F Indexable milling
 G Solid carbide end mill
 H Solid carbide end mill
 I Short hole drill
 J Solid carbide drill


Technical information of indexable short hole drilling tools

▶ Precautions for indexable short hole drilling

1 Precautions for short hole drilling in lathe

I. The peripheral insert is mounted parallel to the X axis of the equipment.

II. The peripheral insert should be mounted towards the operator. With upper and lower turrets on the lathe, if the drill bit needs to be mounted on the lower one, The peripheral insert should face towards the operator.

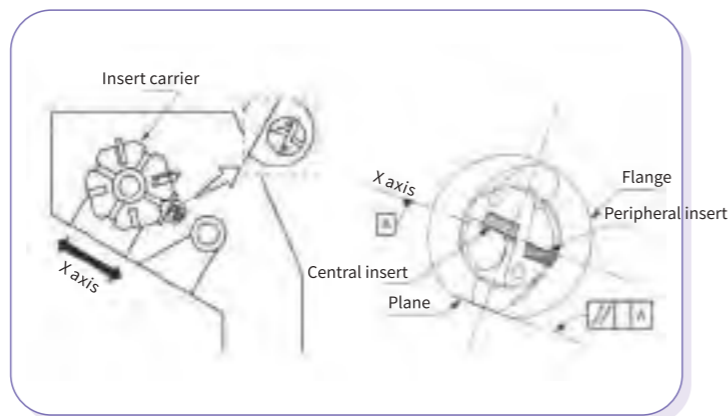

2 Adjustment method of center height:

The center height of the central insert is about 0.05 mm lower than the center (design state). If the turntable is staggered from the spindle center, the center may be too high or the core may be too low. It is very important to check the center height of the inner insert in order to stabilize the machining.

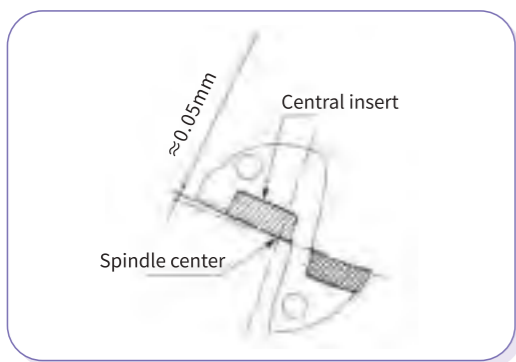


Figure 2

Illustration of center height of the drill bit inner insert

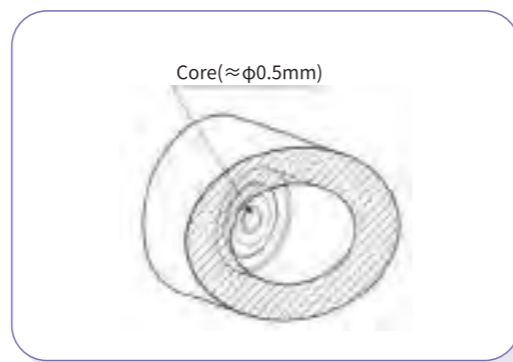


Figure 3

Illustration of core residues in blind hole drilling

Check whether the center height setting of the central insert is proper by the cores remaining in the center of the inner end face of the blind hole. If the diameter of residual cores is about 0.5mm, the center height is correct. If there is no core residue at all or the diameter is over 1mm, the center height needs to be adjusted.

- The blind holes used for checking is machined by a feed rate below 0.1 mm/rev and a depth of about 10mm.
- If there is no core residue at all (or it is very small), it is necessary to adjust the center height because the parts around the drill bit center of the inner cutter insert are prone to collapse.


▶ Short hole drilling and recommended countermeasures

1 Countermeasures to drill hole diameter changes

If the hole diameter gradually shrinks or increases toward the bottom, it is often caused by cutting blockage. It is suggested to adjust the cutting parameters, such as increasing cutting speed and reducing feed rate. If the overall hole diameter is too small, it may be caused by plastic deformation of materials. It is recommended to replace a short hole drilling tool with a long one.

2 Can external cooling be used for short hole drilling?

Given the large amount of chips in short hole drilling, external cooling is not recommended considering the machining efficiency. Meanwhile, the cutting pressure of internal cooling should be ensured for longer tool life and better machining performance.

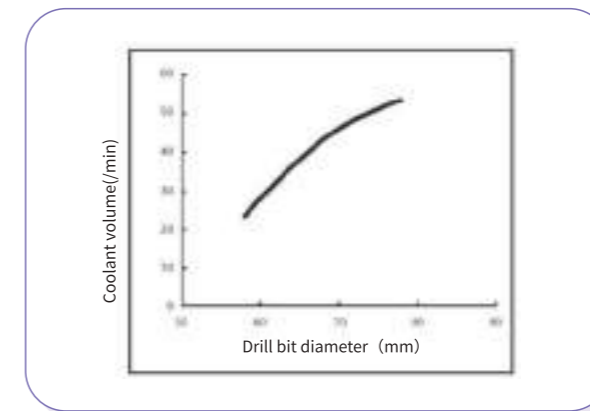

Recommended relationship between drill bit diameter and coolant volume

3 Chip entanglement is highly possible in the cutting process.

When the material to be cut is sticky and the chip is long, the combination of low speed + large feed or high speed + small feed may be used to solve the problem. If chip entanglement is highly possible from the entrance to 10mm while the cutting is stable after 10mm, the entry machining parameters may be adjusted or segmented cutting can be adopted.

At a low speed + large feed, thicker chips are produced, which are easy to break and control.

At a high speed + small feed, thinner chips are produced, and the chip flow direction could be controlled by centrifugal force.

1-10mm can be processed by segment cutting, which can be followed by continuous machining.

4 There is tool vibration in the cutting process.

Tool vibration may be caused by insufficient feed per revolution during the cutting process. The cutting parameters are adjusted as follows:

Increase the feed rate if it is too small.

If the feed rate is below $f=0.06\text{mm/rev}$, please increase it to $f=0.08-0.12\text{mm/rev}$.

If the over fast cutting speed causes cutter vibration, decrease to about $V_c=100-150\text{m/rev}$.

If there are obvious burrs at the drill or the workpiece clamping rigidity is poor, decrease the feed rate to $f=0.07-0.08\text{mm/rev}$.

5 There are obvious scratches on the surface of the machined hole

Please change the cutting parameters or optimize the way of returning the insert.

Selection guidance of solid carbide drills

Tool outline drawing
Tool type

Product specification drawing

Helical angle, coating, insert diameter tolerance, etc.

BD03 Series

BD Series 3×D m7 140° h6

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A1650	16.50	18.00	123	73	48	45.2	Figure 1	●
BD03A1690	16.90	18.00	123	73	48	44.6	Figure 1	○
BD03A1700	17.00	18.00	123	73	48	44.4	Figure 1	●
BD03A1750	17.50	18.00	123	73	48	43.6	Figure 1	●
BD03A1755	17.55	18.00	123	73	48	43.5	Figure 1	○
BD03A1790	17.90	18.00	123	73	48	42.9	Figure 1	○
BD03A1800	18.00	18.00	123	73	48	42.7	Figure 2	●
BD03A1830	18.30	20.00	131	79	50	48.2	Figure 1	○
BD03A1850	18.50	20.00	131	79	50	47.9	Figure 1	●
BD03A1890	18.90	20.00	131	79	50	47.2	Figure 1	○
BD03A1900	19.00	20.00	131	79	50	47.0	Figure 1	●
BD03A1930	19.30	20.00	131	79	50	46.5	Figure 1	○
BD03A1950	19.50	20.00	131	79	50	46.2	Figure 1	●
BD03A1955	19.55	20.00	131	79	50	46.1	Figure 1	○
BD03A1990	19.90	20.00	131	79	50	45.5	Figure 1	○
BD03A2000	20.00	20.00	131	79	50	45.4	Figure 2	●

● Standing inventory ○ Make-to-order


Product order number Basic dimension Pattern Inventory

P		M		K		N		S		H	
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC

✳ Fit well ✳ Applicable

Range of workpiece materials

Code key of solid carbide drilling tools

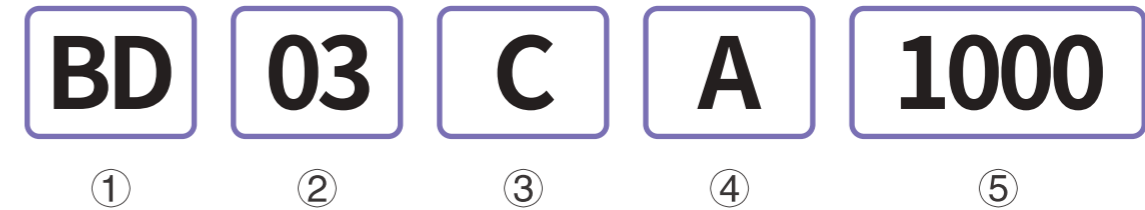

① Product series

BD	Economical
XD	Deep hole type

② Length series (length-diameter ratio)

03	3×D Series
05	5×D Series
08	8×D Series
12	12×D Series
20	20×D Series
30	30×D Series

③ Cooling method

C	Internal cooling
Default	External cooling

④ Shank form

A	Straight shank (DIN 6535HA)
B	Whistle notch shank (DIN 6535HE)

⑤ Diameter

0300	3mm
0600	6mm
1000	10mm
1200	12mm
1600	16mm
2000	20mm




A
General turning
Turing of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

A
General turning
Turing of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

Solid carbide drill

BD03 Series

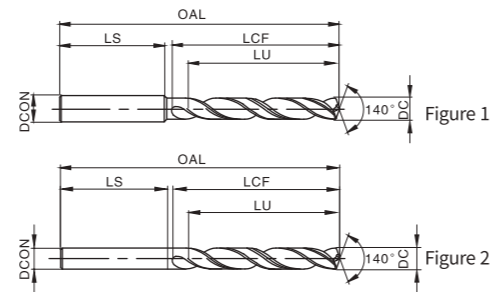

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A0300	3.00	6.00	62	20	36	15.0	Figure 1	●
BD03A0310	3.10	6.00	62	20	36	14.8	Figure 1	●
BD03A0317	3.17	6.00	62	20	36	14.7	Figure 1	○
BD03A0320	3.20	6.00	62	20	36	14.6	Figure 1	●
BD03A0325	3.25	6.00	62	20	36	14.5	Figure 1	○
BD03A0330	3.30	6.00	62	20	36	14.4	Figure 1	●
BD03A0340	3.40	6.00	62	20	36	14.3	Figure 1	●
BD03A0350	3.50	6.00	62	20	36	14.1	Figure 1	●
BD03A0357	3.57	6.00	62	20	36	14.0	Figure 1	○
BD03A0360	3.60	6.00	62	20	36	13.9	Figure 1	●
BD03A0370	3.70	6.00	62	20	36	13.8	Figure 1	●
BD03A0380	3.80	6.00	66	24	36	17.6	Figure 1	●
BD03A0390	3.90	6.00	66	24	36	17.4	Figure 1	●
BD03A0397	3.97	6.00	66	24	36	17.3	Figure 1	○
BD03A0400	4.00	6.00	66	24	36	17.3	Figure 1	●
BD03A0410	4.10	6.00	66	24	36	17.1	Figure 1	●
BD03A0420	4.20	6.00	66	24	36	16.9	Figure 1	●
BD03A0430	4.30	6.00	66	24	36	16.8	Figure 1	●
BD03A0437	4.37	6.00	66	24	36	16.6	Figure 1	○
BD03A0440	4.40	6.00	66	24	36	16.6	Figure 1	●
BD03A0445	4.45	6.00	66	24	36	16.5	Figure 1	○
BD03A0450	4.50	6.00	66	24	36	16.4	Figure 1	●
BD03A0460	4.60	6.00	66	24	36	16.3	Figure 1	●
BD03A0465	4.65	6.00	66	24	36	16.2	Figure 1	○
BD03A0470	4.70	6.00	66	24	36	16.1	Figure 1	●
BD03A0476	4.76	6.00	66	28	36	20.0	Figure 1	○
BD03A0480	4.80	6.00	66	28	36	19.9	Figure 1	●
BD03A0490	4.90	6.00	66	28	36	19.8	Figure 1	●

● Standing inventory ○ Make-to-order

BD03 Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A0500	5.00	6.00	66	28	36	19.6	Figure 1	●
BD03A0510	5.10	6.00	66	28	36	19.4	Figure 1	●
BD03A0516	5.16	6.00	66	28	36	19.3	Figure 1	○
BD03A0520	5.20	6.00	66	28	36	19.3	Figure 1	●
BD03A0530	5.30	6.00	66	28	36	19.1	Figure 1	●
BD03A0540	5.40	6.00	66	28	36	18.9	Figure 1	●
BD03A0550	5.50	6.00	66	28	36	18.7	Figure 1	●
BD03A0555	5.55	6.00	66	28	36	18.7	Figure 1	○
BD03A0556	5.56	6.00	66	28	36	18.6	Figure 1	●
BD03A0560	5.60	6.00	66	28	36	18.6	Figure 1	●
BD03A0565	5.65	6.00	66	28	36	18.5	Figure 1	●
BD03A0570	5.70	6.00	66	28	36	18.4	Figure 1	●
BD03A0575	5.75	6.00	66	28	36	18.3	Figure 1	○
BD03A0580	5.80	6.00	66	28	36	18.2	Figure 1	●
BD03A0590	5.90	6.00	66	28	36	18.1	Figure 1	●
BD03A0595	5.95	6.00	66	28	36	18.0	Figure 1	○
BD03A0600	6.00	6.00	66	28	36	17.9	Figure 2	●
BD03A0610	6.10	8.00	79	34	36	23.7	Figure 1	●
BD03A0620	6.20	8.00	79	34	36	23.6	Figure 1	●
BD03A0630	6.30	8.00	79	34	36	23.4	Figure 1	●
BD03A0635	6.35	8.00	79	34	36	23.3	Figure 1	○
BD03A0640	6.40	8.00	79	34	36	23.2	Figure 1	●
BD03A0650	6.50	8.00	79	34	36	23.1	Figure 1	●
BD03A0660	6.60	8.00	79	34	36	22.9	Figure 1	●
BD03A0670	6.70	8.00	79	34	36	22.7	Figure 1	●
BD03A0675	6.75	8.00	79	34	36	22.6	Figure 1	○
BD03A0680	6.80	8.00	79	34	36	22.6	Figure 1	●
BD03A0690	6.90	8.00	79	34	36	22.4	Figure 1	●
BD03A0700	7.00	8.00	79	34	36	22.2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD03 Series

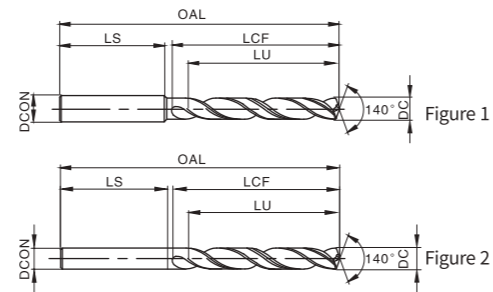

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A0710	7.10	8.00	79	41	36	29.1	Figure 1	●
BD03A0714	7.14	8.00	79	41	36	29.0	Figure 1	○
BD03A0720	7.20	8.00	79	41	36	28.9	Figure 1	●
BD03A0730	7.30	8.00	79	41	36	28.7	Figure 1	●
BD03A0740	7.40	8.00	79	41	36	28.6	Figure 1	●
BD03A0745	7.45	8.00	79	41	36	28.5	Figure 1	○
BD03A0750	7.50	8.00	79	41	36	28.4	Figure 1	●
BD03A0754	7.54	8.00	79	41	36	28.3	Figure 1	○
BD03A0760	7.60	8.00	79	41	36	28.2	Figure 1	●
BD03A0765	7.65	8.00	79	41	36	28.1	Figure 1	○
BD03A0770	7.70	8.00	79	41	36	28.0	Figure 1	●
BD03A0780	7.80	8.00	79	41	36	27.9	Figure 1	●
BD03A0790	7.90	8.00	79	41	36	27.7	Figure 1	●
BD03A0794	7.94	8.00	79	41	36	27.6	Figure 1	○
BD03A0800	8.00	8.00	79	41	36	27.5	Figure 2	●
BD03A0810	8.10	10.00	89	47	40	33.4	Figure 1	●
BD03A0820	8.20	10.00	89	47	40	33.2	Figure 1	●
BD03A0830	8.30	10.00	89	47	40	33.0	Figure 1	●
BD03A0833	8.33	10.00	89	47	40	33.0	Figure 1	○
BD03A0840	8.40	10.00	89	47	40	32.9	Figure 1	●
BD03A0850	8.50	10.00	89	47	40	32.7	Figure 1	●
BD03A0855	8.55	10.00	89	47	40	32.6	Figure 1	○
BD03A0860	8.60	10.00	89	47	40	32.5	Figure 1	●
BD03A0870	8.70	10.00	89	47	40	32.4	Figure 1	●
BD03A0873	8.73	10.00	89	47	40	32.3	Figure 1	○
BD03A0880	8.80	10.00	89	47	40	32.2	Figure 1	●
BD03A0890	8.90	10.00	89	47	40	32.0	Figure 1	●
BD03A0900	9.00	10.00	89	47	40	31.9	Figure 1	●

● Standing inventory ○ Make-to-order

BD03 Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A0905	9.05	10.00	89	47	40	31.8	Figure 1	○
BD03A0910	9.10	10.00	89	47	40	31.7	Figure 1	●
BD03A0913	9.13	10.00	89	47	40	31.6	Figure 1	○
BD03A0920	9.20	10.00	89	47	40	31.5	Figure 1	●
BD03A0925	9.25	10.00	89	47	40	31.4	Figure 1	○
BD03A0930	9.30	10.00	89	47	40	31.4	Figure 1	●
BD03A0940	9.40	10.00	89	47	40	31.2	Figure 1	●
BD03A0950	9.50	10.00	89	47	40	31.0	Figure 1	●
BD03A0952	9.52	10.00	89	47	40	31.0	Figure 1	○
BD03A0955	9.55	10.00	89	47	40	30.9	Figure 1	○
BD03A0960	9.60	10.00	89	47	40	30.9	Figure 1	●
BD03A0970	9.70	10.00	89	47	40	30.7	Figure 1	●
BD03A0980	9.80	10.00	89	47	40	30.5	Figure 1	●
BD03A0990	9.90	10.00	89	47	40	30.3	Figure 1	●
BD03A0992	9.92	10.00	89	47	40	30.3	Figure 1	○
BD03A1000	10.00	10.00	89	47	40	30.2	Figure 2	●
BD03A1010	10.10	12.00	102	55	45	38.0	Figure 1	●
BD03A1020	10.20	12.00	102	55	45	37.8	Figure 1	●
BD03A1030	10.30	12.00	102	55	45	37.7	Figure 1	●
BD03A1032	10.32	12.00	102	55	45	37.6	Figure 1	○
BD03A1040	10.40	12.00	102	55	45	37.5	Figure 1	●
BD03A1050	10.50	12.00	102	55	45	37.3	Figure 1	●
BD03A1060	10.60	12.00	102	55	45	37.2	Figure 1	●
BD03A1070	10.70	12.00	102	55	45	37.0	Figure 1	●
BD03A1072	10.72	12.00	102	55	45	37.0	Figure 1	○
BD03A1080	10.80	12.00	102	55	45	36.8	Figure 1	●
BD03A1090	10.90	12.00	102	55	45	36.7	Figure 1	●
BD03A1100	11.00	12.00	102	55	45	36.5	Figure 1	●
BD03A1110	11.10	12.00	102	55	45	36.3	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD03 Series

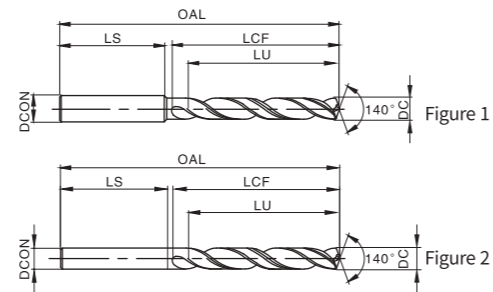

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A1111	11.11	12.00	102	55	45	36.3	Figure 1	●
BD03A1120	11.20	12.00	102	55	45	36.2	Figure 1	●
BD03A1130	11.30	12.00	102	55	45	36.0	Figure 1	●
BD03A1140	11.40	12.00	102	55	45	35.8	Figure 1	●
BD03A1150	11.50	12.00	102	55	45	35.7	Figure 1	●
BD03A1151	11.51	12.00	102	55	45	35.6	Figure 1	○
BD03A1155	11.55	12.00	102	55	45	35.6	Figure 1	○
BD03A1160	11.60	12.00	102	55	45	35.5	Figure 1	●
BD03A1170	11.70	12.00	102	55	45	35.3	Figure 1	●
BD03A1180	11.80	12.00	102	55	45	35.2	Figure 1	●
BD03A1190	11.90	12.00	102	55	45	35.0	Figure 1	●
BD03A1191	11.91	12.00	102	55	45	35.0	Figure 1	○
BD03A1200	12.00	12.00	102	55	45	34.8	Figure 2	●
BD03A1210	12.10	14.00	107	60	45	39.6	Figure 1	○
BD03A1220	12.20	14.00	107	60	45	39.5	Figure 1	○
BD03A1230	12.30	14.00	107	60	45	39.3	Figure 1	○
BD03A1240	12.40	14.00	107	60	45	39.1	Figure 1	○
BD03A1250	12.50	14.00	107	60	45	39.0	Figure 1	●
BD03A1260	12.60	14.00	107	60	45	38.8	Figure 1	○
BD03A1270	12.70	14.00	107	60	45	38.6	Figure 1	○
BD03A1280	12.80	14.00	107	60	45	38.5	Figure 1	○
BD03A1290	12.90	14.00	107	60	45	38.3	Figure 1	○
BD03A1300	13.00	14.00	107	60	45	38.1	Figure 1	●
BD03A1310	13.10	14.00	107	60	45	38.0	Figure 1	○
BD03A1320	13.20	14.00	107	60	45	37.8	Figure 1	○
BD03A1330	13.30	14.00	107	60	45	37.6	Figure 1	○
BD03A1340	13.40	14.00	107	60	45	37.5	Figure 1	○
BD03A1350	13.50	14.00	107	60	45	37.3	Figure 1	●

● Standing inventory ○ Make-to-order

BD03 Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A1355	13.55	14.00	107	60	45	37.2	Figure 1	○
BD03A1360	13.60	14.00	107	60	45	37.1	Figure 1	○
BD03A1370	13.70	14.00	107	60	45	37.0	Figure 1	○
BD03A1380	13.80	14.00	107	60	45	36.8	Figure 1	○
BD03A1390	13.90	14.00	107	60	45	36.6	Figure 1	○
BD03A1400	14.00	14.00	107	60	45	36.5	Figure 2	●
BD03A1410	14.10	16.00	115	65	48	41.3	Figure 1	○
BD03A1420	14.20	16.00	115	65	48	41.1	Figure 1	○
BD03A1429	14.29	16.00	115	65	48	41.0	Figure 1	○
BD03A1430	14.30	16.00	115	65	48	40.9	Figure 1	○
BD03A1440	14.40	16.00	115	65	48	40.8	Figure 1	○
BD03A1450	14.50	16.00	115	65	48	40.6	Figure 1	●
BD03A1460	14.60	16.00	115	65	48	40.4	Figure 1	○
BD03A1470	14.70	16.00	115	65	48	40.3	Figure 1	○
BD03A1480	14.80	16.00	115	65	48	40.1	Figure 1	○
BD03A1490	14.90	16.00	115	65	48	39.9	Figure 1	○
BD03A1500	15.00	16.00	115	65	48	39.8	Figure 1	●
BD03A1510	15.10	16.00	115	65	48	39.6	Figure 1	○
BD03A1520	15.20	16.00	115	65	48	39.4	Figure 1	○
BD03A1530	15.30	16.00	115	65	48	39.3	Figure 1	○
BD03A1540	15.40	16.00	115	65	48	39.1	Figure 1	○
BD03A1550	15.50	16.00	115	65	48	38.9	Figure 1	●
BD03A1555	15.55	16.00	115	65	48	38.8	Figure 1	○
BD03A1560	15.60	16.00	115	65	48	38.8	Figure 1	○
BD03A1570	15.70	16.00	115	65	48	38.6	Figure 1	○
BD03A1580	15.80	16.00	115	65	48	38.4	Figure 1	○
BD03A1587	15.87	16.00	115	65	48	38.3	Figure 1	○
BD03A1590	15.90	16.00	115	65	48	38.3	Figure 1	○
BD03A1600	16.00	16.00	115	65	48	38.1	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD03 Series

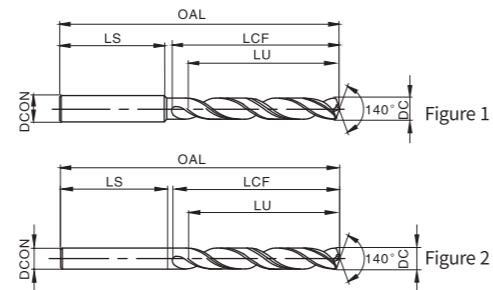

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03A1650	16.50	18.00	123	73	48	45.2	Figure 1	●
BD03A1690	16.90	18.00	123	73	48	44.6	Figure 1	○
BD03A1700	17.00	18.00	123	73	48	44.4	Figure 1	●
BD03A1750	17.50	18.00	123	73	48	43.6	Figure 1	●
BD03A1755	17.55	18.00	123	73	48	43.5	Figure 1	○
BD03A1790	17.90	18.00	123	73	48	42.9	Figure 1	○
BD03A1800	18.00	18.00	123	73	48	42.7	Figure 2	●
BD03A1830	18.30	20.00	131	79	50	48.2	Figure 1	○
BD03A1850	18.50	20.00	131	79	50	47.9	Figure 1	●
BD03A1890	18.90	20.00	131	79	50	47.2	Figure 1	○
BD03A1900	19.00	20.00	131	79	50	47.0	Figure 1	●
BD03A1930	19.30	20.00	131	79	50	46.5	Figure 1	○
BD03A1950	19.50	20.00	131	79	50	46.2	Figure 1	●
BD03A1955	19.55	20.00	131	79	50	46.1	Figure 1	○
BD03A1990	19.90	20.00	131	79	50	45.5	Figure 1	○
BD03A2000	20.00	20.00	131	79	50	45.4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀			

☀ Fit well ☀ Applicable

Cutting speed recommendations - BD03 Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	80	90	100
	Alloy steel	< 1200	< 350	60	70	80
	High-alloyed steel and tool steel	< 1400	< 380	50	60	70
M	Austenite and ferrite stainless steel	< 680	< 220	30	40	50
	Martensite stainless steel	< 820	< 240	30	40	50
K	Gray cast iron	-	< 280	160	180	200
	Nodular cast iron	-	< 320	120	140	160
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	15	25	35
	Titanium alloy	< 2100	< 400	20	30	40
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - BD03 Series

Workpiece material	Feed per revolution mm/r										
	Φ2~Φ2.5	Φ2.5~Φ3	Φ3~Φ4	Φ4~Φ5	Φ5~Φ6	Φ6~Φ8	Φ8~Φ10	Φ10~Φ12	Φ12~Φ16	Φ16~Φ20	
P	Carbon steel	0.100	0.125	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500
	Alloy steel	0.080	0.100	0.125	0.125	0.160	0.200	0.250	0.250	0.315	0.400
	High-alloyed steel and tool steel	0.063	0.080	0.100	0.100	0.125	0.160	0.200	0.200	0.250	0.315
M	Austenite and ferrite stainless steel	0.050	0.063	0.080	0.080	0.100	0.125	0.160	0.160	0.200	0.250
	Martensite stainless steel	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
K	Gray cast iron	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500	0.630	0.630
	Nodular cast iron	0.125	0.160	0.200	0.200	0.250	0.315	0.400	0.400	0.500	0.630
N	Non-ferrous alloy	-	-	-	-	-	-	-	-	-	-
	Aluminum alloy	-	-	-	-	-	-	-	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	0.050	0.063	0.080	0.080	0.080	0.125	0.160	0.160	0.200	0.250
	Titanium alloy	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
H	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Solid carbide drill

BD03C Series

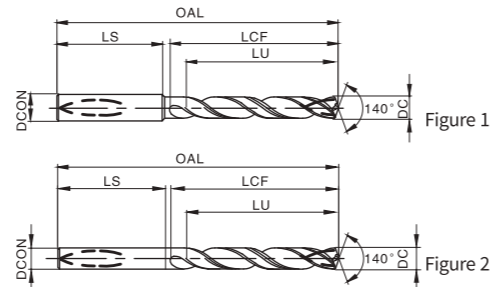

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA0300	3.00	6.00	62	20	36	15.0	Figure 1	●
BD03CA0310	3.10	6.00	62	20	36	14.8	Figure 1	●
BD03CA0317	3.17	6.00	62	20	36	14.7	Figure 1	○
BD03CA0320	3.20	6.00	62	20	36	14.6	Figure 1	●
BD03CA0325	3.25	6.00	62	20	36	14.5	Figure 1	○
BD03CA0330	3.30	6.00	62	20	36	14.4	Figure 1	●
BD03CA0340	3.40	6.00	62	20	36	14.3	Figure 1	●
BD03CA0350	3.50	6.00	62	20	36	14.1	Figure 1	●
BD03CA0357	3.57	6.00	62	20	36	14.0	Figure 1	○
BD03CA0360	3.60	6.00	62	20	36	13.9	Figure 1	●
BD03CA0370	3.70	6.00	62	20	36	13.8	Figure 1	●
BD03CA0380	3.80	6.00	66	24	36	17.6	Figure 1	●
BD03CA0390	3.90	6.00	66	24	36	17.4	Figure 1	●
BD03CA0397	3.97	6.00	66	24	36	17.3	Figure 1	○
BD03CA0400	4.00	6.00	66	24	36	17.3	Figure 1	●
BD03CA0410	4.10	6.00	66	24	36	17.1	Figure 1	●
BD03CA0420	4.20	6.00	66	24	36	16.9	Figure 1	●
BD03CA0430	4.30	6.00	66	24	36	16.8	Figure 1	●
BD03CA0437	4.37	6.00	66	24	36	16.6	Figure 1	○
BD03CA0440	4.40	6.00	66	24	36	16.6	Figure 1	●
BD03CA0445	4.45	6.00	66	24	36	16.5	Figure 1	○
BD03CA0450	4.50	6.00	66	24	36	16.4	Figure 1	●
BD03CA0460	4.60	6.00	66	24	36	16.3	Figure 1	●
BD03CA0465	4.65	6.00	66	24	36	16.2	Figure 1	○
BD03CA0470	4.70	6.00	66	24	36	16.1	Figure 1	●
BD03CA0476	4.76	6.00	66	28	36	20.0	Figure 1	○
BD03CA0480	4.80	6.00	66	28	36	19.9	Figure 1	●
BD03CA0490	4.90	6.00	66	28	36	19.8	Figure 1	●

● Standing inventory ○ Make-to-order

BD03C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA0500	5.00	6.00	66	28	36	19.6	Figure 1	●
BD03CA0510	5.10	6.00	66	28	36	19.4	Figure 1	●
BD03CA0516	5.16	6.00	66	28	36	19.3	Figure 1	○
BD03CA0520	5.20	6.00	66	28	36	19.3	Figure 1	●
BD03CA0530	5.30	6.00	66	28	36	19.1	Figure 1	●
BD03CA0540	5.40	6.00	66	28	36	18.9	Figure 1	●
BD03CA0550	5.50	6.00	66	28	36	18.7	Figure 1	●
BD03CA0555	5.55	6.00	66	28	36	18.7	Figure 1	○
BD03CA0556	5.56	6.00	66	28	36	18.6	Figure 1	●
BD03CA0560	5.60	6.00	66	28	36	18.6	Figure 1	●
BD03CA0565	5.65	6.00	66	28	36	18.5	Figure 1	●
BD03CA0570	5.70	6.00	66	28	36	18.4	Figure 1	●
BD03CA0575	5.75	6.00	66	28	36	18.3	Figure 1	○
BD03CA0580	5.80	6.00	66	28	36	18.2	Figure 1	●
BD03CA0590	5.90	6.00	66	28	36	18.1	Figure 1	●
BD03CA0595	5.95	6.00	66	28	36	18.0	Figure 1	○
BD03CA0600	6.00	6.00	66	28	36	17.9	Figure 2	●
BD03CA0610	6.10	8.00	79	34	36	23.7	Figure 1	●
BD03CA0620	6.20	8.00	79	34	36	23.6	Figure 1	●
BD03CA0630	6.30	8.00	79	34	36	23.4	Figure 1	●
BD03CA0635	6.35	8.00	79	34	36	23.3	Figure 1	○
BD03CA0640	6.40	8.00	79	34	36	23.2	Figure 1	●
BD03CA0650	6.50	8.00	79	34	36	23.1	Figure 1	●
BD03CA0660	6.60	8.00	79	34	36	22.9	Figure 1	●
BD03CA0670	6.70	8.00	79	34	36	22.7	Figure 1	●
BD03CA0675	6.75	8.00	79	34	36	22.6	Figure 1	○
BD03CA0680	6.80	8.00	79	34	36	22.6	Figure 1	●
BD03CA0690	6.90	8.00	79	34	36	22.4	Figure 1	●
BD03CA0700	7.00	8.00	79	34	36	22.2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S	H			
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD03C Series

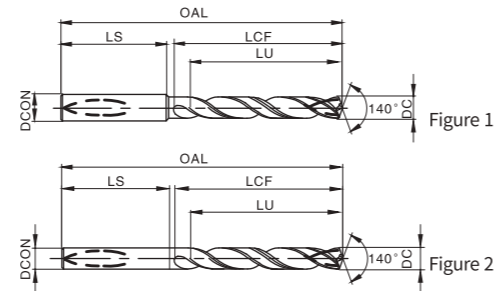

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA0710	7.10	8.00	79	41	36	29.1	Figure 1	●
BD03CA0714	7.14	8.00	79	41	36	29.0	Figure 1	○
BD03CA0720	7.20	8.00	79	41	36	28.9	Figure 1	●
BD03CA0730	7.30	8.00	79	41	36	28.7	Figure 1	●
BD03CA0740	7.40	8.00	79	41	36	28.6	Figure 1	●
BD03CA0745	7.45	8.00	79	41	36	28.5	Figure 1	○
BD03CA0750	7.50	8.00	79	41	36	28.4	Figure 1	●
BD03CA0754	7.54	8.00	79	41	36	28.3	Figure 1	○
BD03CA0760	7.60	8.00	79	41	36	28.2	Figure 1	●
BD03CA0765	7.65	8.00	79	41	36	28.1	Figure 1	○
BD03CA0770	7.70	8.00	79	41	36	28.0	Figure 1	●
BD03CA0780	7.80	8.00	79	41	36	27.9	Figure 1	●
BD03CA0790	7.90	8.00	79	41	36	27.7	Figure 1	●
BD03CA0794	7.94	8.00	79	41	36	27.6	Figure 1	○
BD03CA0800	8.00	8.00	79	41	36	27.5	Figure 2	●
BD03CA0810	8.10	10.00	89	47	40	33.4	Figure 1	●
BD03CA0820	8.20	10.00	89	47	40	33.2	Figure 1	●
BD03CA0830	8.30	10.00	89	47	40	33.0	Figure 1	●
BD03CA0833	8.33	10.00	89	47	40	33.0	Figure 1	○
BD03CA0840	8.40	10.00	89	47	40	32.9	Figure 1	●
BD03CA0850	8.50	10.00	89	47	40	32.7	Figure 1	●
BD03CA0855	8.55	10.00	89	47	40	32.6	Figure 1	○
BD03CA0860	8.60	10.00	89	47	40	32.5	Figure 1	●
BD03CA0870	8.70	10.00	89	47	40	32.4	Figure 1	●
BD03CA0873	8.73	10.00	89	47	40	32.3	Figure 1	○
BD03CA0880	8.80	10.00	89	47	40	32.2	Figure 1	●
BD03CA0890	8.90	10.00	89	47	40	32.0	Figure 1	●
BD03CA0900	9.00	10.00	89	47	40	31.9	Figure 1	●

● Standing inventory ○ Make-to-order

BD03C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA0905	9.05	10.00	89	47	40	31.8	Figure 1	○
BD03CA0910	9.10	10.00	89	47	40	31.7	Figure 1	●
BD03CA0913	9.13	10.00	89	47	40	31.6	Figure 1	○
BD03CA0920	9.20	10.00	89	47	40	31.5	Figure 1	●
BD03CA0925	9.25	10.00	89	47	40	31.4	Figure 1	○
BD03CA0930	9.30	10.00	89	47	40	31.4	Figure 1	●
BD03CA0940	9.40	10.00	89	47	40	31.2	Figure 1	●
BD03CA0950	9.50	10.00	89	47	40	31.0	Figure 1	●
BD03CA0952	9.52	10.00	89	47	40	31.0	Figure 1	○
BD03CA0955	9.55	10.00	89	47	40	30.9	Figure 1	○
BD03CA0960	9.60	10.00	89	47	40	30.9	Figure 1	●
BD03CA0970	9.70	10.00	89	47	40	30.7	Figure 1	●
BD03CA0980	9.80	10.00	89	47	40	30.5	Figure 1	●
BD03CA0990	9.90	10.00	89	47	40	30.3	Figure 1	●
BD03CA0992	9.92	10.00	89	47	40	30.3	Figure 1	○
BD03CA1000	10.00	10.00	89	47	40	30.2	Figure 2	●
BD03CA1010	10.10	12.00	102	55	45	38.0	Figure 1	●
BD03CA1020	10.20	12.00	102	55	45	37.8	Figure 1	●
BD03CA1030	10.30	12.00	102	55	45	37.7	Figure 1	●
BD03CA1032	10.32	12.00	102	55	45	37.6	Figure 1	○
BD03CA1040	10.40	12.00	102	55	45	37.5	Figure 1	●
BD03CA1050	10.50	12.00	102	55	45	37.3	Figure 1	●
BD03CA1060	10.60	12.00	102	55	45	37.2	Figure 1	●
BD03CA1070	10.70	12.00	102	55	45	37.0	Figure 1	●
BD03CA1072	10.72	12.00	102	55	45	37.0	Figure 1	○
BD03CA1080	10.80	12.00	102	55	45	36.8	Figure 1	●
BD03CA1090	10.90	12.00	102	55	45	36.7	Figure 1	●
BD03CA1100	11.00	12.00	102	55	45	36.5	Figure 1	●
BD03CA1110	11.10	12.00	102	55	45	36.3	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD03C Series

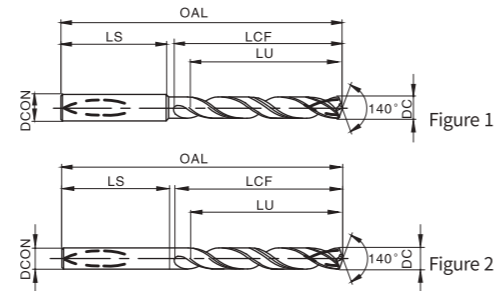

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA1111	11.11	12.00	102	55	45	36.3	Figure 1	●
BD03CA1120	11.20	12.00	102	55	45	36.2	Figure 1	●
BD03CA1130	11.30	12.00	102	55	45	36.0	Figure 1	●
BD03CA1140	11.40	12.00	102	55	45	35.8	Figure 1	●
BD03CA1150	11.50	12.00	102	55	45	35.7	Figure 1	●
BD03CA1151	11.51	12.00	102	55	45	35.6	Figure 1	○
BD03CA1155	11.55	12.00	102	55	45	35.6	Figure 1	○
BD03CA1160	11.60	12.00	102	55	45	35.5	Figure 1	●
BD03CA1170	11.70	12.00	102	55	45	35.3	Figure 1	●
BD03CA1180	11.80	12.00	102	55	45	35.2	Figure 1	●
BD03CA1190	11.90	12.00	102	55	45	35.0	Figure 1	●
BD03CA1191	11.91	12.00	102	55	45	35.0	Figure 1	○
BD03CA1200	12.00	12.00	102	55	45	34.8	Figure 2	●
BD03CA1210	12.10	14.00	107	60	45	39.6	Figure 1	○
BD03CA1220	12.20	14.00	107	60	45	39.5	Figure 1	○
BD03CA1230	12.30	14.00	107	60	45	39.3	Figure 1	○
BD03CA1240	12.40	14.00	107	60	45	39.1	Figure 1	○
BD03CA1250	12.50	14.00	107	60	45	39.0	Figure 1	●
BD03CA1260	12.60	14.00	107	60	45	38.8	Figure 1	○
BD03CA1270	12.70	14.00	107	60	45	38.6	Figure 1	○
BD03CA1280	12.80	14.00	107	60	45	38.5	Figure 1	○
BD03CA1290	12.90	14.00	107	60	45	38.3	Figure 1	○
BD03CA1300	13.00	14.00	107	60	45	38.1	Figure 1	●
BD03CA1310	13.10	14.00	107	60	45	38.0	Figure 1	○
BD03CA1320	13.20	14.00	107	60	45	37.8	Figure 1	○
BD03CA1330	13.30	14.00	107	60	45	37.6	Figure 1	○
BD03CA1340	13.40	14.00	107	60	45	37.5	Figure 1	○
BD03CA1350	13.50	14.00	107	60	45	37.3	Figure 1	●

● Standing inventory ○ Make-to-order

BD03C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA1355	13.55	14.00	107	60	45	37.2	Figure 1	○
BD03CA1360	13.60	14.00	107	60	45	37.1	Figure 1	○
BD03CA1370	13.70	14.00	107	60	45	37.0	Figure 1	○
BD03CA1380	13.80	14.00	107	60	45	36.8	Figure 1	○
BD03CA1390	13.90	14.00	107	60	45	36.6	Figure 1	○
BD03CA1400	14.00	14.00	107	60	45	36.5	Figure 2	●
BD03CA1410	14.10	16.00	115	65	48	41.3	Figure 1	○
BD03CA1420	14.20	16.00	115	65	48	41.1	Figure 1	○
BD03CA1429	14.29	16.00	115	65	48	41.0	Figure 1	○
BD03CA1430	14.30	16.00	115	65	48	40.9	Figure 1	○
BD03CA1440	14.40	16.00	115	65	48	40.8	Figure 1	○
BD03CA1450	14.50	16.00	115	65	48	40.6	Figure 1	●
BD03CA1460	14.60	16.00	115	65	48	40.4	Figure 1	○
BD03CA1470	14.70	16.00	115	65	48	40.3	Figure 1	○
BD03CA1480	14.80	16.00	115	65	48	40.1	Figure 1	○
BD03CA1490	14.90	16.00	115	65	48	39.9	Figure 1	○
BD03CA1500	15.00	16.00	115	65	48	39.8	Figure 1	●
BD03CA1510	15.10	16.00	115	65	48	39.6	Figure 1	○
BD03CA1520	15.20	16.00	115	65	48	39.4	Figure 1	○
BD03CA1530	15.30	16.00	115	65	48	39.3	Figure 1	○
BD03CA1540	15.40	16.00	115	65	48	39.1	Figure 1	○
BD03CA1550	15.50	16.00	115	65	48	38.9	Figure 1	●
BD03CA1555	15.55	16.00	115	65	48	38.8	Figure 1	○
BD03CA1560	15.60	16.00	115	65	48	38.8	Figure 1	○
BD03CA1570	15.70	16.00	115	65	48	38.6	Figure 1	○
BD03CA1580	15.80	16.00	115	65	48	38.4	Figure 1	○
BD03CA1587	15.87	16.00	115	65	48	38.3	Figure 1	○
BD03CA1590	15.90	16.00	115	65	48	38.3	Figure 1	○
BD03CA1600	16.00	16.00	115	65	48	38.1	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD03C Series

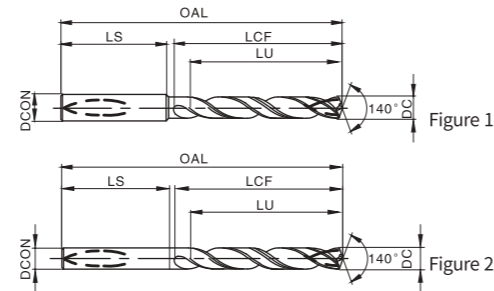

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD03CA1650	16.50	18.00	123	73	48	45.2	Figure 1	●
BD03CA1690	16.90	18.00	123	73	48	44.6	Figure 1	○
BD03CA1700	17.00	18.00	123	73	48	44.4	Figure 1	●
BD03CA1750	17.50	18.00	123	73	48	43.6	Figure 1	●
BD03CA1755	17.55	18.00	123	73	48	43.5	Figure 1	○
BD03CA1790	17.90	18.00	123	73	48	42.9	Figure 1	○
BD03CA1800	18.00	18.00	123	73	48	42.7	Figure 2	●
BD03CA1830	18.30	20.00	131	79	50	48.2	Figure 1	○
BD03CA1850	18.50	20.00	131	79	50	47.9	Figure 1	●
BD03CA1890	18.90	20.00	131	79	50	47.2	Figure 1	○
BD03CA1900	19.00	20.00	131	79	50	47.0	Figure 1	●
BD03CA1930	19.30	20.00	131	79	50	46.5	Figure 1	○
BD03CA1950	19.50	20.00	131	79	50	46.2	Figure 1	●
BD03CA1955	19.55	20.00	131	79	50	46.1	Figure 1	○
BD03CA1990	19.90	20.00	131	79	50	45.5	Figure 1	○
BD03CA2000	20.00	20.00	131	79	50	45.4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

Cutting speed recommendations - BD03C Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	100	110	120
	Alloy steel	< 1200	< 350	80	90	100
	High-alloyed steel and tool steel	< 1400	< 380	60	70	80
M	Austenite and ferrite stainless steel	< 680	< 220	40	50	60
	Martensite stainless steel	< 820	< 240	40	50	60
K	Gray cast iron	-	< 280	180	200	220
	Nodular cast iron	-	< 320	140	160	180
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	20	30	40
	Titanium alloy	< 2100	< 400	30	40	50
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - BD03C Series


Workpiece material	Feed per revolution mm/r										
	Φ2~Φ2.5	Φ2.5~Φ3	Φ3~Φ4	Φ4~Φ5	Φ5~Φ6	Φ6~Φ8	Φ8~Φ10	Φ10~Φ12	Φ12~Φ16	Φ16~Φ20	
P	Carbon steel	0.100	0.125	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500
	Alloy steel	0.080	0.100	0.125	0.125	0.160	0.200	0.250	0.250	0.315	0.400
	High-alloyed steel and tool steel	0.063	0.080	0.100	0.100	0.125	0.160	0.200	0.200	0.250	0.315
M	Austenite and ferrite stainless steel	0.050	0.063	0.080	0.080	0.100	0.125	0.160	0.160	0.200	0.250
	Martensite stainless steel	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
K	Gray cast iron	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500	0.630	0.630
	Nodular cast iron	0.125	0.160	0.200	0.200	0.250	0.315	0.400	0.400	0.500	0.630
N	Non-ferrous alloy	-	-	-	-	-	-	-	-	-	-
	Aluminum alloy	-	-	-	-	-	-	-	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	0.050	0.063	0.080	0.080	0.080	0.125	0.160	0.160	0.200	0.250
	Titanium alloy	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
H	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-

A General turning
 Buring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

A General turning
 Buring of small components
 Parting and grooving
 Threading
 B Indexable milling
 Solid carbide end mill
 C Short hole drill
 Solid carbide drill

Solid carbide drill

BD05 Series

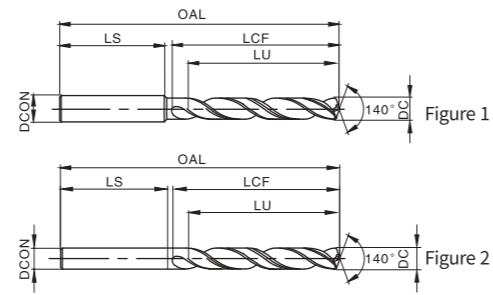

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A0300	3.00	6.00	66	28	36	23.0	Figure 1	●
BD05A0310	3.10	6.00	66	28	36	22.8	Figure 1	●
BD05A0317	3.17	6.00	66	28	36	22.7	Figure 1	○
BD05A0320	3.20	6.00	66	28	36	22.6	Figure 1	●
BD05A0325	3.25	6.00	66	28	36	22.5	Figure 1	○
BD05A0330	3.30	6.00	66	28	36	22.4	Figure 1	●
BD05A0340	3.40	6.00	66	28	36	22.3	Figure 1	●
BD05A0350	3.50	6.00	66	28	36	22.1	Figure 1	●
BD05A0357	3.57	6.00	66	28	36	22.0	Figure 1	○
BD05A0360	3.60	6.00	66	28	36	21.9	Figure 1	●
BD05A0370	3.70	6.00	66	28	36	21.8	Figure 1	●
BD05A0380	3.80	6.00	74	36	36	29.6	Figure 1	●
BD05A0390	3.90	6.00	74	36	36	29.4	Figure 1	●
BD05A0397	3.97	6.00	74	36	36	29.3	Figure 1	○
BD05A0400	4.00	6.00	74	36	36	29.3	Figure 1	●
BD05A0410	4.10	6.00	74	36	36	29.1	Figure 1	●
BD05A0420	4.20	6.00	74	36	36	28.9	Figure 1	●
BD05A0430	4.30	6.00	74	36	36	28.8	Figure 1	●
BD05A0437	4.37	6.00	74	36	36	28.6	Figure 1	○
BD05A0440	4.40	6.00	74	36	36	28.6	Figure 1	●
BD05A0450	4.50	6.00	74	36	36	28.4	Figure 1	○
BD05A0460	4.60	6.00	74	36	36	28.3	Figure 1	●
BD05A0465	4.65	6.00	74	36	36	28.2	Figure 1	●
BD05A0470	4.70	6.00	74	36	36	28.1	Figure 1	○
BD05A0476	4.76	6.00	82	44	36	36.0	Figure 1	●
BD05A0480	4.80	6.00	82	44	36	35.9	Figure 1	○
BD05A0490	4.90	6.00	82	44	36	35.8	Figure 1	●
BD05A0500	5.00	6.00	82	44	36	35.6	Figure 1	●

● Standing inventory ○ Make-to-order

BD05 Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A0510	5.10	6.00	82	44	36	35.4	Figure 1	●
BD05A0516	5.16	6.00	82	44	36	35.3	Figure 1	●
BD05A0520	5.20	6.00	82	44	36	35.3	Figure 1	○
BD05A0530	5.30	6.00	82	44	36	35.1	Figure 1	●
BD05A0540	5.40	6.00	82	44	36	34.9	Figure 1	●
BD05A0550	5.50	6.00	82	44	36	34.7	Figure 1	●
BD05A0555	5.55	6.00	82	44	36	34.7	Figure 1	●
BD05A0560	5.60	6.00	82	44	36	34.6	Figure 1	○
BD05A0570	5.70	6.00	82	44	36	34.4	Figure 1	●
BD05A0580	5.80	6.00	82	44	36	34.2	Figure 1	●
BD05A0590	5.90	6.00	82	44	36	34.1	Figure 1	●
BD05A0595	5.95	6.00	82	44	36	34.0	Figure 1	●
BD05A0600	6.00	6.00	82	44	36	33.9	Figure 2	○
BD05A0610	6.10	8.00	91	53	36	42.7	Figure 1	●
BD05A0620	6.20	8.00	91	53	36	42.6	Figure 1	●
BD05A0630	6.30	8.00	91	53	36	42.4	Figure 1	○
BD05A0635	6.35	8.00	91	53	36	42.3	Figure 1	●
BD05A0640	6.40	8.00	91	53	36	42.2	Figure 1	●
BD05A0650	6.50	8.00	91	53	36	42.1	Figure 1	●
BD05A0653	6.53	8.00	91	53	36	42.0	Figure 1	●
BD05A0660	6.60	8.00	91	53	36	41.9	Figure 1	○
BD05A0670	6.70	8.00	91	53	36	41.7	Figure 1	●
BD05A0675	6.75	8.00	91	53	36	41.6	Figure 1	●
BD05A0680	6.80	8.00	91	53	36	41.6	Figure 1	●
BD05A0690	6.90	8.00	91	53	36	41.4	Figure 1	●
BD05A0700	7.00	8.00	91	53	36	41.2	Figure 1	○
BD05A0710	7.10	8.00	91	53	36	41.1	Figure 1	●
BD05A0714	7.14	8.00	91	53	36	41.0	Figure 1	●
BD05A0720	7.20	8.00	91	53	36	40.9	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S	H			
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C35

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

C36

BD05 Series

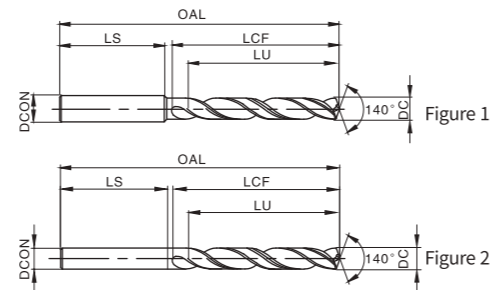

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A0730	7.30	8.00	91	53	36	40.7	Figure 1	●
BD05A0740	7.40	8.00	91	53	36	40.6	Figure 1	○
BD05A0750	7.50	8.00	91	53	36	40.4	Figure 1	●
BD05A0754	7.54	8.00	91	53	36	40.3	Figure 1	●
BD05A0760	7.60	8.00	91	53	36	40.2	Figure 1	●
BD05A0770	7.70	8.00	91	53	36	40.0	Figure 1	○
BD05A0780	7.80	8.00	91	53	36	39.9	Figure 1	●
BD05A0790	7.90	8.00	91	53	36	39.7	Figure 1	○
BD05A0794	7.94	8.00	91	53	36	39.6	Figure 1	●
BD05A0800	8.00	8.00	91	53	36	39.5	Figure 2	○
BD05A0810	8.10	10.00	103	61	40	47.4	Figure 1	●
BD05A0820	8.20	10.00	103	61	40	47.2	Figure 1	●
BD05A0830	8.30	10.00	103	61	40	47.0	Figure 1	●
BD05A0833	8.33	10.00	103	61	40	47.0	Figure 1	○
BD05A0840	8.40	10.00	103	61	40	46.9	Figure 1	●
BD05A0850	8.50	10.00	103	61	40	46.7	Figure 1	●
BD05A0860	8.60	10.00	103	61	40	46.5	Figure 1	●
BD05A0870	8.70	10.00	103	61	40	46.4	Figure 1	●
BD05A0873	8.73	10.00	103	61	40	46.3	Figure 1	○
BD05A0880	8.80	10.00	103	61	40	46.2	Figure 1	●
BD05A0890	8.90	10.00	103	61	40	46.0	Figure 1	●
BD05A0900	9.00	10.00	103	61	40	45.9	Figure 1	○
BD05A0910	9.10	10.00	103	61	40	45.7	Figure 1	●
BD05A0913	9.13	10.00	103	61	40	45.6	Figure 1	●
BD05A0920	9.20	10.00	103	61	40	45.5	Figure 1	○
BD05A0925	9.25	10.00	103	61	40	45.4	Figure 1	●
BD05A0930	9.30	10.00	103	61	40	45.4	Figure 1	●
BD05A0940	9.40	10.00	103	61	40	45.2	Figure 1	●

● Standing inventory ○ Make-to-order

BD05 Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A0950	9.50	10.00	103	61	40	45.0	Figure 1	○
BD05A0952	9.52	10.00	103	61	40	45.0	Figure 1	●
BD05A0960	9.60	10.00	103	61	40	44.9	Figure 1	○
BD05A0970	9.70	10.00	103	61	40	44.7	Figure 1	●
BD05A0980	9.80	10.00	103	61	40	44.5	Figure 1	○
BD05A0990	9.90	10.00	103	61	40	44.3	Figure 1	●
BD05A0992	9.92	10.00	103	61	40	44.3	Figure 1	●
BD05A1000	10.00	10.00	103	61	40	44.2	Figure 2	●
BD05A1010	10.10	12.00	118	71	45	54.0	Figure 1	○
BD05A1020	10.20	12.00	118	71	45	53.8	Figure 1	○
BD05A1030	10.30	12.00	118	71	45	53.7	Figure 1	●
BD05A1032	10.32	12.00	118	71	45	53.6	Figure 1	●
BD05A1040	10.40	12.00	118	71	45	53.5	Figure 1	●
BD05A1050	10.50	12.00	118	71	45	53.3	Figure 1	●
BD05A1060	10.60	12.00	118	71	45	53.2	Figure 1	○
BD05A1070	10.70	12.00	118	71	45	53.0	Figure 1	●
BD05A1072	10.72	12.00	118	71	45	53.0	Figure 1	●
BD05A1080	10.80	12.00	118	71	45	52.8	Figure 1	●
BD05A1090	10.90	12.00	118	71	45	52.7	Figure 1	●
BD05A1100	11.00	12.00	118	71	45	52.5	Figure 1	○
BD05A1110	11.10	12.00	118	71	45	52.3	Figure 1	●
BD05A1111	11.11	12.00	118	71	45	52.3	Figure 1	●
BD05A1120	11.20	12.00	118	71	45	52.2	Figure 1	●
BD05A1130	11.30	12.00	118	71	45	52.0	Figure 1	●
BD05A1140	11.40	12.00	118	71	45	51.8	Figure 1	○
BD05A1150	11.50	12.00	118	71	45	51.7	Figure 1	●
BD05A1160	11.60	12.00	118	71	45	51.5	Figure 1	●
BD05A1170	11.70	12.00	118	71	45	51.3	Figure 1	●
BD05A1180	11.80	12.00	118	71	45	51.2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD05 Series

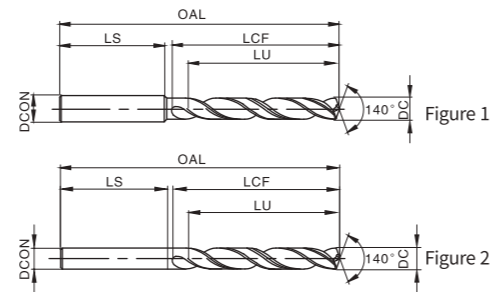

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A1190	11.90	12.00	118	71	45	51.0	Figure 1	●
BD05A1191	11.91	12.00	118	71	45	51.0	Figure 1	●
BD05A1200	12.00	12.00	118	71	45	50.8	Figure 2	●
BD05A1210	12.10	14.00	124	77	45	56.6	Figure 1	●
BD05A1220	12.20	14.00	124	77	45	56.5	Figure 1	●
BD05A1230	12.30	14.00	124	77	45	56.3	Figure 1	○
BD05A1240	12.40	14.00	124	77	45	56.1	Figure 1	○
BD05A1250	12.50	14.00	124	77	45	56.0	Figure 1	●
BD05A1260	12.60	14.00	124	77	45	55.8	Figure 1	●
BD05A1270	12.70	14.00	124	77	45	55.6	Figure 1	●
BD05A1280	12.80	14.00	124	77	45	55.5	Figure 1	●
BD05A1290	12.90	14.00	124	77	45	55.3	Figure 1	○
BD05A1300	13.00	14.00	124	77	45	55.1	Figure 1	●
BD05A1310	13.10	14.00	124	77	45	55.0	Figure 1	○
BD05A1320	13.20	14.00	124	77	45	54.8	Figure 1	○
BD05A1330	13.30	14.00	124	77	45	54.6	Figure 1	○
BD05A1340	13.40	14.00	124	77	45	54.5	Figure 1	○
BD05A1350	13.50	14.00	124	77	45	54.3	Figure 1	●
BD05A1370	13.70	14.00	124	77	45	54.0	Figure 1	○
BD05A1380	13.80	14.00	124	77	45	53.8	Figure 1	○
BD05A1390	13.90	14.00	124	77	45	53.6	Figure 1	○
BD05A1400	14.00	14.00	124	77	45	53.5	Figure 2	○
BD05A1410	14.10	16.00	133	83	48	59.3	Figure 1	●
BD05A1420	14.20	16.00	133	83	48	59.1	Figure 1	○
BD05A1429	14.29	16.00	133	83	48	59.0	Figure 1	○
BD05A1430	14.30	16.00	133	83	48	58.9	Figure 1	○
BD05A1440	14.40	16.00	133	83	48	58.8	Figure 1	○
BD05A1450	14.50	16.00	133	83	48	58.6	Figure 1	●

● Standing inventory ○ Make-to-order

BD05 Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A1460	14.60	16.00	133	83	48	58.4	Figure 1	○
BD05A1470	14.70	16.00	133	83	48	58.3	Figure 1	○
BD05A1480	14.80	16.00	133	83	48	58.1	Figure 1	○
BD05A1490	14.90	16.00	133	83	48	57.9	Figure 1	○
BD05A1500	15.00	16.00	133	83	48	57.8	Figure 1	○
BD05A1510	15.10	16.00	133	83	48	57.6	Figure 1	●
BD05A1520	15.20	16.00	133	83	48	57.4	Figure 1	○
BD05A1530	15.30	16.00	133	83	48	57.3	Figure 1	○
BD05A1540	15.40	16.00	133	83	48	57.1	Figure 1	○
BD05A1550	15.50	16.00	133	83	48	56.9	Figure 1	○
BD05A1560	15.60	16.00	133	83	48	56.8	Figure 1	○
BD05A1570	15.70	16.00	133	83	48	56.6	Figure 1	●
BD05A1580	15.80	16.00	133	83	48	56.4	Figure 1	○
BD05A1587	15.87	16.00	133	83	48	56.3	Figure 1	○
BD05A1590	15.90	16.00	133	83	48	56.3	Figure 1	○
BD05A1600	16.00	16.00	133	83	48	56.1	Figure 2	○
BD05A1608	16.08	18.00	143	93	48	66.0	Figure 1	●
BD05A1650	16.50	18.00	143	93	48	65.2	Figure 1	○
BD05A1667	16.67	18.00	143	93	48	65.0	Figure 1	○
BD05A1670	16.70	18.00	143	93	48	64.9	Figure 1	○
BD05A1690	16.90	18.00	143	93	48	64.6	Figure 1	○
BD05A1700	17.00	18.00	143	93	48	64.4	Figure 1	●
BD05A1750	17.50	18.00	143	93	48	63.6	Figure 1	○
BD05A1770	17.70	18.00	143	93	48	63.2	Figure 1	○
BD05A1786	17.86	18.00	143	93	48	63.0	Figure 1	○
BD05A1800	18.00	18.00	143	93	48	62.7	Figure 2	○
BD05A1850	18.50	20.00	153	101	50	69.9	Figure 1	○
BD05A1870	18.70	20.00	153	101	50	69.5	Figure 1	○
BD05A1890	18.90	20.00	153	101	50	69.2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD05 Series

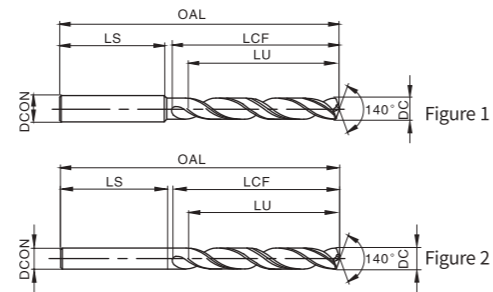

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05A1900	19.00	20.00	153	101	50	69.0	Figure 1	●
BD05A1905	19.05	20.00	153	101	50	69.0	Figure 1	○
BD05A1916	19.16	20.00	153	101	50	68.8	Figure 1	○
BD05A1925	19.25	20.00	153	101	50	68.6	Figure 1	○
BD05A1930	19.30	20.00	153	101	50	68.5	Figure 1	○
BD05A1945	19.45	20.00	153	101	50	68.3	Figure 1	○
BD05A1950	19.50	20.00	153	101	50	68.2	Figure 1	●
BD05A1970	19.70	20.00	153	101	50	67.9	Figure 1	○
BD05A1984	19.84	20.00	153	101	50	67.6	Figure 1	○
BD05A2000	20.00	20.00	153	101	50	67.4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

Cutting speed recommendations - BD05C Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	80	90	100
	Alloy steel	< 1200	< 350	60	70	80
	High-alloyed steel and tool steel	< 1400	< 380	50	60	70
M	Austenite and ferrite stainless steel	< 680	< 220	30	40	50
	Martensite stainless steel	< 820	< 240	30	40	50
K	Gray cast iron	-	< 280	160	180	200
	Nodular cast iron	-	< 320	120	140	160
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	15	25	35
	Titanium alloy	< 2100	< 400	20	30	40
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - BD05C Series

Workpiece material	Feed per revolution mm/r										
	Φ2~Φ2.5	Φ2.5~Φ3	Φ3~Φ4	Φ4~Φ5	Φ5~Φ6	Φ6~Φ8	Φ8~Φ10	Φ10~Φ12	Φ12~Φ16	Φ16~Φ20	
P	Carbon steel	0.100	0.125	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500
	Alloy steel	0.080	0.100	0.125	0.125	0.160	0.200	0.250	0.250	0.315	0.400
	High-alloyed steel and tool steel	0.063	0.080	0.100	0.100	0.125	0.160	0.200	0.200	0.250	0.315
M	Austenite and ferrite stainless steel	0.050	0.063	0.080	0.080	0.100	0.125	0.160	0.160	0.200	0.250
	Martensite stainless steel	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
K	Gray cast iron	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500	0.630	0.630
	Nodular cast iron	0.125	0.160	0.200	0.200	0.250	0.315	0.400	0.400	0.500	0.630
N	Non-ferrous alloy	-	-	-	-	-	-	-	-	-	-
	Aluminum alloy	-	-	-	-	-	-	-	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	0.050	0.063	0.080	0.080	0.080	0.125	0.160	0.160	0.200	0.250
	Titanium alloy	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
H	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Solid carbide drill

BD05C Series

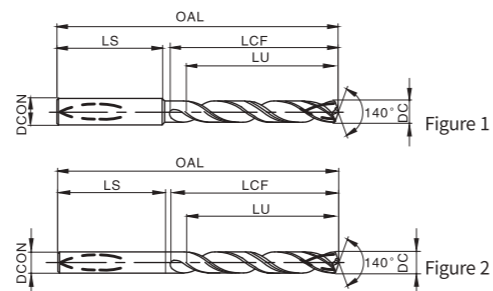

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA0300	3.00	6.00	66	28	36	23.0	Figure 1	●
BD05CA0310	3.10	6.00	66	28	36	22.8	Figure 1	●
BD05CA0317	3.17	6.00	66	28	36	22.7	Figure 1	○
BD05CA0320	3.20	6.00	66	28	36	22.6	Figure 1	●
BD05CA0325	3.25	6.00	66	28	36	22.5	Figure 1	○
BD05CA0330	3.30	6.00	66	28	36	22.4	Figure 1	●
BD05CA0340	3.40	6.00	66	28	36	22.3	Figure 1	●
BD05CA0350	3.50	6.00	66	28	36	22.1	Figure 1	●
BD05CA0357	3.57	6.00	66	28	36	22.0	Figure 1	○
BD05CA0360	3.60	6.00	66	28	36	21.9	Figure 1	●
BD05CA0370	3.70	6.00	66	28	36	21.8	Figure 1	●
BD05CA0380	3.80	6.00	74	36	36	29.6	Figure 1	●
BD05CA0390	3.90	6.00	74	36	36	29.4	Figure 1	●
BD05CA0397	3.97	6.00	74	36	36	29.3	Figure 1	○
BD05CA0400	4.00	6.00	74	36	36	29.3	Figure 1	●
BD05CA0410	4.10	6.00	74	36	36	29.1	Figure 1	●
BD05CA0420	4.20	6.00	74	36	36	28.9	Figure 1	●
BD05CA0430	4.30	6.00	74	36	36	28.8	Figure 1	●
BD05CA0437	4.37	6.00	74	36	36	28.6	Figure 1	○
BD05CA0440	4.40	6.00	74	36	36	28.6	Figure 1	●
BD05CA0450	4.50	6.00	74	36	36	28.4	Figure 1	○
BD05CA0460	4.60	6.00	74	36	36	28.3	Figure 1	●
BD05CA0465	4.65	6.00	74	36	36	28.2	Figure 1	●
BD05CA0470	4.70	6.00	74	36	36	28.1	Figure 1	○
BD05CA0476	4.76	6.00	82	44	36	36.0	Figure 1	●
BD05CA0480	4.80	6.00	82	44	36	35.9	Figure 1	○
BD05CA0490	4.90	6.00	82	44	36	35.8	Figure 1	●
BD05CA0500	5.00	6.00	82	44	36	35.6	Figure 1	●

● Standing inventory ○ Make-to-order

BD05C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA0510	5.10	6.00	82	44	36	35.4	Figure 1	●
BD05CA0516	5.16	6.00	82	44	36	35.3	Figure 1	●
BD05CA0520	5.20	6.00	82	44	36	35.3	Figure 1	○
BD05CA0530	5.30	6.00	82	44	36	35.1	Figure 1	●
BD05CA0540	5.40	6.00	82	44	36	34.9	Figure 1	●
BD05CA0550	5.50	6.00	82	44	36	34.7	Figure 1	●
BD05CA0555	5.55	6.00	82	44	36	34.7	Figure 1	●
BD05CA0560	5.60	6.00	82	44	36	34.6	Figure 1	○
BD05CA0570	5.70	6.00	82	44	36	34.4	Figure 1	●
BD05CA0580	5.80	6.00	82	44	36	34.2	Figure 1	●
BD05CA0590	5.90	6.00	82	44	36	34.1	Figure 1	●
BD05CA0595	5.95	6.00	82	44	36	34.0	Figure 1	●
BD05CA0600	6.00	6.00	82	44	36	33.9	Figure 2	○
BD05CA0610	6.10	8.00	91	53	36	42.7	Figure 1	●
BD05CA0620	6.20	8.00	91	53	36	42.6	Figure 1	●
BD05CA0630	6.30	8.00	91	53	36	42.4	Figure 1	○
BD05CA0635	6.35	8.00	91	53	36	42.3	Figure 1	●
BD05CA0640	6.40	8.00	91	53	36	42.2	Figure 1	●
BD05CA0650	6.50	8.00	91	53	36	42.1	Figure 1	●
BD05CA0653	6.53	8.00	91	53	36	42.0	Figure 1	●
BD05CA0660	6.60	8.00	91	53	36	41.9	Figure 1	○
BD05CA0670	6.70	8.00	91	53	36	41.7	Figure 1	●
BD05CA0675	6.75	8.00	91	53	36	41.6	Figure 1	●
BD05CA0680	6.80	8.00	91	53	36	41.6	Figure 1	●
BD05CA0690	6.90	8.00	91	53	36	41.4	Figure 1	●
BD05CA0700	7.00	8.00	91	53	36	41.2	Figure 1	○
BD05CA0710	7.10	8.00	91	53	36	41.1	Figure 1	●
BD05CA0714	7.14	8.00	91	53	36	41.0	Figure 1	●
BD05CA0720	7.20	8.00	91	53	36	40.9	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S	H			
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD05C Series

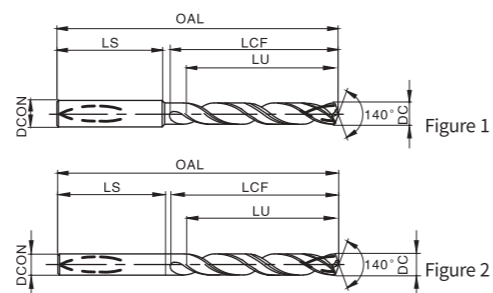

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA0730	7.30	8.00	91	53	36	40.7	Figure 1	●
BD05CA0740	7.40	8.00	91	53	36	40.6	Figure 1	○
BD05CA0750	7.50	8.00	91	53	36	40.4	Figure 1	●
BD05CA0754	7.54	8.00	91	53	36	40.3	Figure 1	●
BD05CA0760	7.60	8.00	91	53	36	40.2	Figure 1	●
BD05CA0770	7.70	8.00	91	53	36	40.0	Figure 1	○
BD05CA0780	7.80	8.00	91	53	36	39.9	Figure 1	●
BD05CA0790	7.90	8.00	91	53	36	39.7	Figure 1	○
BD05CA0794	7.94	8.00	91	53	36	39.6	Figure 1	●
BD05CA0800	8.00	8.00	91	53	36	39.5	Figure 2	○
BD05CA0810	8.10	10.00	103	61	40	47.4	Figure 1	●
BD05CA0820	8.20	10.00	103	61	40	47.2	Figure 1	●
BD05CA0830	8.30	10.00	103	61	40	47.0	Figure 1	●
BD05CA0833	8.33	10.00	103	61	40	47.0	Figure 1	○
BD05CA0840	8.40	10.00	103	61	40	46.9	Figure 1	●
BD05CA0850	8.50	10.00	103	61	40	46.7	Figure 1	●
BD05CA0860	8.60	10.00	103	61	40	46.5	Figure 1	●
BD05CA0870	8.70	10.00	103	61	40	46.4	Figure 1	●
BD05CA0873	8.73	10.00	103	61	40	46.3	Figure 1	○
BD05CA0880	8.80	10.00	103	61	40	46.2	Figure 1	●
BD05CA0890	8.90	10.00	103	61	40	46.0	Figure 1	●
BD05CA0900	9.00	10.00	103	61	40	45.9	Figure 1	○
BD05CA0910	9.10	10.00	103	61	40	45.7	Figure 1	●
BD05CA0913	9.13	10.00	103	61	40	45.6	Figure 1	●
BD05CA0920	9.20	10.00	103	61	40	45.5	Figure 1	○
BD05CA0925	9.25	10.00	103	61	40	45.4	Figure 1	●
BD05CA0930	9.30	10.00	103	61	40	45.4	Figure 1	●
BD05CA0940	9.40	10.00	103	61	40	45.2	Figure 1	●

● Standing inventory ○ Make-to-order

BD05C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA0950	9.50	10.00	103	61	40	45.0	Figure 1	○
BD05CA0952	9.52	10.00	103	61	40	45.0	Figure 1	●
BD05CA0960	9.60	10.00	103	61	40	44.9	Figure 1	○
BD05CA0970	9.70	10.00	103	61	40	44.7	Figure 1	●
BD05CA0980	9.80	10.00	103	61	40	44.5	Figure 1	○
BD05CA0990	9.90	10.00	103	61	40	44.3	Figure 1	●
BD05CA0992	9.92	10.00	103	61	40	44.3	Figure 1	●
BD05CA1000	10.00	10.00	103	61	40	44.2	Figure 2	●
BD05CA1010	10.10	12.00	118	71	45	54.0	Figure 1	○
BD05CA1020	10.20	12.00	118	71	45	53.8	Figure 1	○
BD05CA1030	10.30	12.00	118	71	45	53.7	Figure 1	●
BD05CA1032	10.32	12.00	118	71	45	53.6	Figure 1	●
BD05CA1040	10.40	12.00	118	71	45	53.5	Figure 1	●
BD05CA1050	10.50	12.00	118	71	45	53.3	Figure 1	●
BD05CA1060	10.60	12.00	118	71	45	53.2	Figure 1	○
BD05CA1070	10.70	12.00	118	71	45	53.0	Figure 1	●
BD05CA1072	10.72	12.00	118	71	45	53.0	Figure 1	●
BD05CA1080	10.80	12.00	118	71	45	52.8	Figure 1	●
BD05CA1090	10.90	12.00	118	71	45	52.7	Figure 1	●
BD05CA1100	11.00	12.00	118	71	45	52.5	Figure 1	○
BD05CA1110	11.10	12.00	118	71	45	52.3	Figure 1	●
BD05CA1111	11.11	12.00	118	71	45	52.3	Figure 1	●
BD05CA1120	11.20	12.00	118	71	45	52.2	Figure 1	●
BD05CA1130	11.30	12.00	118	71	45	52.0	Figure 1	●
BD05CA1140	11.40	12.00	118	71	45	51.8	Figure 1	○
BD05CA1150	11.50	12.00	118	71	45	51.7	Figure 1	●
BD05CA1160	11.60	12.00	118	71	45	51.5	Figure 1	●
BD05CA1170	11.70	12.00	118	71	45	51.3	Figure 1	●
BD05CA1180	11.80	12.00	118	71	45	51.2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD05C Series

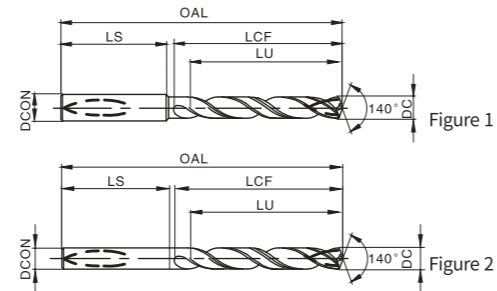

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA1190	11.90	12.00	118	71	45	51.0	Figure 1	●
BD05CA1191	11.91	12.00	118	71	45	51.0	Figure 1	●
BD05CA1200	12.00	12.00	118	71	45	50.8	Figure 2	●
BD05CA1210	12.10	14.00	124	77	45	56.6	Figure 1	●
BD05CA1220	12.20	14.00	124	77	45	56.5	Figure 1	●
BD05CA1230	12.30	14.00	124	77	45	56.3	Figure 1	○
BD05CA1240	12.40	14.00	124	77	45	56.1	Figure 1	○
BD05CA1250	12.50	14.00	124	77	45	56.0	Figure 1	●
BD05CA1260	12.60	14.00	124	77	45	55.8	Figure 1	●
BD05CA1270	12.70	14.00	124	77	45	55.6	Figure 1	●
BD05CA1280	12.80	14.00	124	77	45	55.5	Figure 1	●
BD05CA1290	12.90	14.00	124	77	45	55.3	Figure 1	○
BD05CA1300	13.00	14.00	124	77	45	55.1	Figure 1	●
BD05CA1310	13.10	14.00	124	77	45	55.0	Figure 1	○
BD05CA1320	13.20	14.00	124	77	45	54.8	Figure 1	○
BD05CA1330	13.30	14.00	124	77	45	54.6	Figure 1	○
BD05CA1340	13.40	14.00	124	77	45	54.5	Figure 1	○
BD05CA1350	13.50	14.00	124	77	45	54.3	Figure 1	●
BD05CA1370	13.70	14.00	124	77	45	54.0	Figure 1	○
BD05CA1380	13.80	14.00	124	77	45	53.8	Figure 1	○
BD05CA1390	13.90	14.00	124	77	45	53.6	Figure 1	○
BD05CA1400	14.00	14.00	124	77	45	53.5	Figure 2	○
BD05CA1410	14.10	16.00	133	83	48	59.3	Figure 1	●
BD05CA1420	14.20	16.00	133	83	48	59.1	Figure 1	○
BD05CA1429	14.29	16.00	133	83	48	59.0	Figure 1	○
BD05CA1430	14.30	16.00	133	83	48	58.9	Figure 1	○
BD05CA1440	14.40	16.00	133	83	48	58.8	Figure 1	○
BD05CA1450	14.50	16.00	133	83	48	58.6	Figure 1	●

● Standing inventory ○ Make-to-order

BD05C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA1460	14.60	16.00	133	83	48	58.4	Figure 1	○
BD05CA1470	14.70	16.00	133	83	48	58.3	Figure 1	○
BD05CA1480	14.80	16.00	133	83	48	58.1	Figure 1	○
BD05CA1490	14.90	16.00	133	83	48	57.9	Figure 1	○
BD05CA1500	15.00	16.00	133	83	48	57.8	Figure 1	○
BD05CA1510	15.10	16.00	133	83	48	57.6	Figure 1	●
BD05CA1520	15.20	16.00	133	83	48	57.4	Figure 1	○
BD05CA1530	15.30	16.00	133	83	48	57.3	Figure 1	○
BD05CA1540	15.40	16.00	133	83	48	57.1	Figure 1	○
BD05CA1550	15.50	16.00	133	83	48	56.9	Figure 1	○
BD05CA1560	15.60	16.00	133	83	48	56.8	Figure 1	○
BD05CA1570	15.70	16.00	133	83	48	56.6	Figure 1	●
BD05CA1580	15.80	16.00	133	83	48	56.4	Figure 1	○
BD05CA1587	15.87	16.00	133	83	48	56.3	Figure 1	○
BD05CA1590	15.90	16.00	133	83	48	56.3	Figure 1	○
BD05CA1600	16.00	16.00	133	83	48	56.1	Figure 2	○
BD05CA1608	16.08	18.00	143	93	48	66.0	Figure 1	●
BD05CA1650	16.50	18.00	143	93	48	65.2	Figure 1	○
BD05CA1667	16.67	18.00	143	93	48	65.0	Figure 1	○
BD05CA1670	16.70	18.00	143	93	48	64.9	Figure 1	○
BD05CA1690	16.90	18.00	143	93	48	64.6	Figure 1	○
BD05CA1700	17.00	18.00	143	93	48	64.4	Figure 1	●
BD05CA1750	17.50	18.00	143	93	48	63.6	Figure 1	○
BD05CA1770	17.70	18.00	143	93	48	63.2	Figure 1	○
BD05CA1786	17.86	18.00	143	93	48	63.0	Figure 1	○
BD05CA1800	18.00	18.00	143	93	48	62.7	Figure 2	○
BD05CA1850	18.50	20.00	153	101	50	69.9	Figure 1	○
BD05CA1870	18.70	20.00	153	101	50	69.5	Figure 1	○
BD05CA1890	18.90	20.00	153	101	50	69.2	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD05C Series

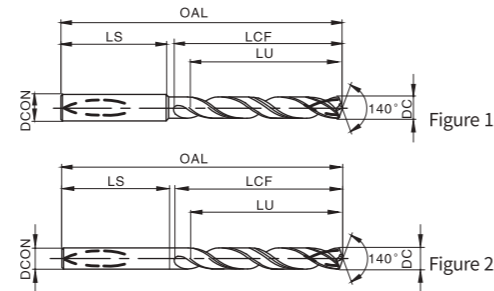

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD05CA1900	19.00	20.00	153	101	50	69.0	Figure 1	●
BD05CA1905	19.05	20.00	153	101	50	69.0	Figure 1	○
BD05CA1916	19.16	20.00	153	101	50	68.8	Figure 1	○
BD05CA1925	19.25	20.00	153	101	50	68.6	Figure 1	○
BD05CA1930	19.30	20.00	153	101	50	68.5	Figure 1	○
BD05CA1945	19.45	20.00	153	101	50	68.3	Figure 1	○
BD05CA1950	19.50	20.00	153	101	50	68.2	Figure 1	●
BD05CA1970	19.70	20.00	153	101	50	67.9	Figure 1	○
BD05CA1984	19.84	20.00	153	101	50	67.6	Figure 1	○
BD05CA2000	20.00	20.00	153	101	50	67.4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

Cutting speed recommendations - BD05C Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	100	110	120
	Alloy steel	< 1200	< 350	80	90	100
	High-alloyed steel and tool steel	< 1400	< 380	60	70	80
M	Austenite and ferrite stainless steel	< 680	< 220	40	50	60
	Martensite stainless steel	< 820	< 240	40	50	60
K	Gray cast iron	-	< 280	180	200	220
	Nodular cast iron	-	< 320	140	160	180
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	20	30	40
	Titanium alloy	< 2100	< 400	30	40	50
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - BD05C Series

Workpiece material	Feed per revolution mm/r										
	Φ2~Φ2.5	Φ2.5~Φ3	Φ3~Φ4	Φ4~Φ5	Φ5~Φ6	Φ6~Φ8	Φ8~Φ10	Φ10~Φ12	Φ12~Φ16	Φ16~Φ20	
P	Carbon steel	0.100	0.125	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500
	Alloy steel	0.080	0.100	0.125	0.125	0.160	0.200	0.250	0.250	0.315	0.400
	High-alloyed steel and tool steel	0.063	0.080	0.100	0.100	0.125	0.160	0.200	0.200	0.250	0.315
M	Austenite and ferrite stainless steel	0.050	0.063	0.080	0.080	0.100	0.125	0.160	0.160	0.200	0.250
	Martensite stainless steel	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
K	Gray cast iron	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500	0.630	0.630
	Nodular cast iron	0.125	0.160	0.200	0.200	0.250	0.315	0.400	0.400	0.500	0.630
N	Non-ferrous alloy	-	-	-	-	-	-	-	-	-	-
	Aluminum alloy	-	-	-	-	-	-	-	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	0.050	0.063	0.080	0.080	0.080	0.125	0.160	0.160	0.200	0.250
	Titanium alloy	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
H	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Solid carbide drill

BD08C Series

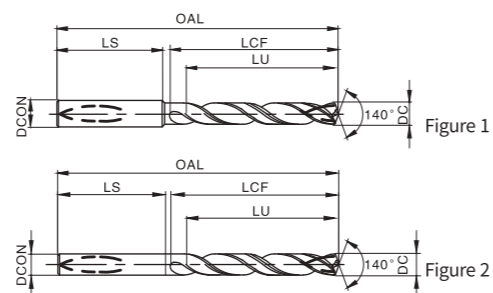

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD08CA0300	3.00	6.00	70	30	36	25.0	Figure 1	●
BD08CA0310	3.10	6.00	70	30	36	24.8	Figure 1	●
BD08CA0317	3.17	6.00	70	30	36	24.7	Figure 1	○
BD08CA0320	3.20	6.00	70	30	36	24.6	Figure 1	●
BD08CA0325	3.25	6.00	70	30	36	24.5	Figure 1	○
BD08CA0330	3.30	6.00	70	30	36	24.4	Figure 1	●
BD08CA0340	3.40	6.00	75	35.5	36	29.8	Figure 1	●
BD08CA0350	3.50	6.00	75	35.5	36	29.6	Figure 1	●
BD08CA0357	3.57	6.00	75	35.5	36	29.5	Figure 1	○
BD08CA0360	3.60	6.00	75	35.5	36	29.4	Figure 1	●
BD08CA0370	3.70	6.00	75	35.5	36	29.3	Figure 1	●
BD08CA0380	3.80	6.00	75	37.5	36	31.1	Figure 1	●
BD08CA0390	3.90	6.00	75	37.5	36	30.9	Figure 1	●
BD08CA0397	3.97	6.00	75	37.5	36	30.8	Figure 1	○
BD08CA0400	4.00	6.00	75	37.5	36	30.8	Figure 1	●
BD08CA0410	4.10	6.00	75	37.5	36	30.6	Figure 1	●
BD08CA0420	4.20	6.00	75	37.5	36	30.4	Figure 1	●
BD08CA0430	4.30	6.00	85	45	36	37.8	Figure 1	●
BD08CA0437	4.37	6.00	85	45	36	37.6	Figure 1	○
BD08CA0440	4.40	6.00	85	45	36	37.6	Figure 1	●
BD08CA0450	4.50	6.00	85	45	36	37.4	Figure 1	○
BD08CA0460	4.60	6.00	85	45	36	37.3	Figure 1	●
BD08CA0465	4.65	6.00	85	45	36	37.2	Figure 1	●
BD08CA0470	4.70	6.00	85	45	36	37.1	Figure 1	○
BD08CA0476	4.76	6.00	90	50	36	42.0	Figure 1	●
BD08CA0480	4.80	6.00	90	50	36	41.9	Figure 1	○
BD08CA0490	4.90	6.00	90	50	36	41.8	Figure 1	●
BD08CA0500	5.00	6.00	90	50	36	41.6	Figure 1	●

● Standing inventory ○ Make-to-order

BD08C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD08CA0510	5.10	6.00	90	50	36	41.4	Figure 1	●
BD08CA0516	5.16	6.00	90	50	36	41.3	Figure 1	●
BD08CA0520	5.20	6.00	90	50	36	41.3	Figure 1	○
BD08CA0530	5.30	6.00	90	50	36	41.1	Figure 1	●
BD08CA0540	5.40	6.00	97	57	36	47.9	Figure 1	●
BD08CA0550	5.50	6.00	97	57	36	47.7	Figure 1	●
BD08CA0556	5.56	6.00	97	57	36	47.6	Figure 1	●
BD08CA0570	5.70	6.00	97	57	36	47.4	Figure 1	○
BD08CA0580	5.80	6.00	97	57	36	47.2	Figure 1	●
BD08CA0590	5.90	6.00	97	57	36	47.1	Figure 1	●
BD08CA0595	5.95	6.00	97	57	36	47.0	Figure 1	●
BD08CA0600	6.00	6.00	97	57	36	46.9	Figure 2	●
BD08CA0620	6.20	8.00	106	66	36	55.6	Figure 1	○
BD08CA0630	6.30	8.00	106	66	36	55.4	Figure 1	●
BD08CA0635	6.35	8.00	106	66	36	55.3	Figure 1	●
BD08CA0650	6.50	8.00	106	66	36	55.1	Figure 1	○
BD08CA0653	6.53	8.00	106	66	36	55.0	Figure 1	●
BD08CA0660	6.60	8.00	106	66	36	54.9	Figure 1	●
BD08CA0670	6.70	8.00	106	66	36	54.7	Figure 1	●
BD08CA0675	6.75	8.00	106	66	36	54.6	Figure 1	●
BD08CA0680	6.80	8.00	106	66	36	54.6	Figure 1	○
BD08CA0690	6.90	8.00	116	76	36	64.4	Figure 1	●
BD08CA0700	7.00	8.00	116	76	36	64.2	Figure 1	●
BD08CA0710	7.10	8.00	116	76	36	64.1	Figure 1	●
BD08CA0714	7.14	8.00	116	76	36	64.0	Figure 1	●
BD08CA0720	7.20	8.00	116	76	36	63.9	Figure 1	○
BD08CA0730	7.30	8.00	116	76	36	63.7	Figure 1	●
BD08CA0740	7.40	8.00	116	76	36	63.6	Figure 1	●
BD08CA0750	7.50	8.00	116	76	36	63.4	Figure 1	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

BD08C Series

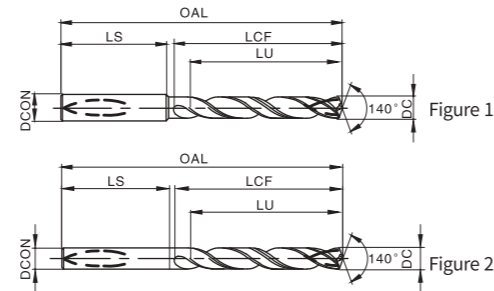

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD08CA0754	7.54	8.00	116	76	36	63.3	Figure 1	●
BD08CA0760	7.60	8.00	116	76	36	63.2	Figure 1	○
BD08CA0770	7.70	8.00	116	76	36	63.0	Figure 1	●
BD08CA0780	7.80	8.00	116	76	36	62.9	Figure 1	●
BD08CA0794	7.94	8.00	116	76	36	62.6	Figure 1	●
BD08CA0800	8.00	8.00	116	76	36	62.5	Figure 2	○
BD08CA0810	8.10	10.00	131	87	40	73.4	Figure 1	●
BD08CA0820	8.20	10.00	131	87	40	73.2	Figure 1	○
BD08CA0833	8.33	10.00	131	87	40	73.0	Figure 1	●
BD08CA0840	8.40	10.00	131	87	40	72.9	Figure 1	○
BD08CA0850	8.50	10.00	131	87	40	72.7	Figure 1	●
BD08CA0860	8.60	10.00	131	87	40	72.5	Figure 1	●
BD08CA0870	8.70	10.00	131	87	40	72.4	Figure 1	●
BD08CA0873	8.73	10.00	131	87	40	72.3	Figure 1	○
BD08CA0880	8.80	10.00	131	87	40	72.2	Figure 1	●
BD08CA0900	9.00	10.00	131	87	40	71.9	Figure 1	●
BD08CA0910	9.10	10.00	139	95	40	79.7	Figure 1	●
BD08CA0913	9.13	10.00	139	95	40	79.6	Figure 1	●
BD08CA0920	9.20	10.00	139	95	40	79.5	Figure 1	○
BD08CA0930	9.30	10.00	139	95	40	79.4	Figure 1	●
BD08CA0940	9.40	10.00	139	95	40	79.2	Figure 1	●
BD08CA0950	9.50	10.00	139	95	40	79.0	Figure 1	○
BD08CA0952	9.52	10.00	139	95	40	79.0	Figure 1	●
BD08CA0970	9.70	10.00	139	95	40	78.7	Figure 1	●
BD08CA0980	9.80	10.00	139	95	40	78.5	Figure 1	○
BD08CA0990	9.90	10.00	139	95	40	78.3	Figure 1	●
BD08CA0992	9.92	10.00	139	95	40	78.3	Figure 1	●
BD08CA1000	10.00	10.00	139	95	40	78.2	Figure 2	●

● Standing inventory ○ Make-to-order

BD08C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD08CA1020	10.20	12.00	155	106	45	88.8	Figure 1	○
BD08CA1030	10.30	12.00	155	106	45	88.7	Figure 1	●
BD08CA1032	10.32	12.00	155	106	45	88.6	Figure 1	○
BD08CA1050	10.50	12.00	155	106	45	88.3	Figure 1	●
BD08CA1072	10.72	12.00	155	106	45	88.0	Figure 1	○
BD08CA1080	10.80	12.00	155	106	45	87.8	Figure 1	●
BD08CA1100	11.00	12.00	155	106	45	87.5	Figure 1	●
BD08CA1111	11.11	12.00	155	106	45	87.3	Figure 1	●
BD08CA1120	11.20	12.00	163	114	45	95.2	Figure 1	○
BD08CA1150	11.50	12.00	163	114	45	94.7	Figure 1	○
BD08CA1180	11.80	12.00	163	114	45	94.2	Figure 1	●
BD08CA1191	11.91	12.00	163	114	45	94.0	Figure 1	●
BD08CA1200	12.00	12.00	163	114	45	93.8	Figure 2	●
BD08CA1210	12.10	14.00	182	133	45	112.6	Figure 1	●
BD08CA1220	12.20	14.00	182	133	45	112.5	Figure 1	○
BD08CA1230	12.30	14.00	182	133	45	112.3	Figure 1	●
BD08CA1250	12.50	14.00	182	133	45	112.0	Figure 1	●
BD08CA1270	12.70	14.00	182	133	45	111.6	Figure 1	●
BD08CA1300	13.00	14.00	182	133	45	111.1	Figure 1	●
BD08CA1350	13.50	14.00	182	133	45	110.3	Figure 1	○
BD08CA1400	14.00	14.00	182	133	45	109.5	Figure 2	●
BD08CA1410	14.10	16.00	204	152	48	128.3	Figure 1	●
BD08CA1420	14.20	16.00	204	152	48	128.1	Figure 1	●
BD08CA1429	14.29	16.00	204	152	48	128.0	Figure 1	●
BD08CA1450	14.50	16.00	204	152	48	127.6	Figure 1	○
BD08CA1500	15.00	16.00	204	152	48	126.8	Figure 1	●
BD08CA1550	15.50	16.00	204	152	48	125.9	Figure 1	●
BD08CA1587	15.87	16.00	204	152	48	125.3	Figure 1	●
BD08CA1600	16.00	16.00	204	152	48	125.1	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving


Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

BD08C Series

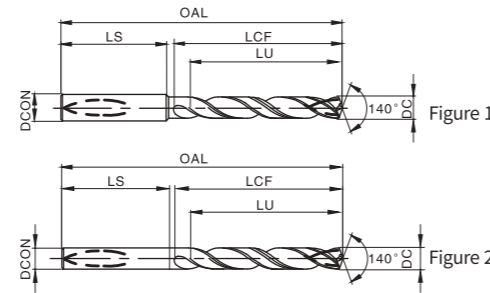

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
BD08CA1650	16.50	18.00	223	171	48	143.2	Figure 1	●
BD08CA1667	16.67	18.00	223	171	48	143.0	Figure 1	○
BD08CA1700	17.00	18.00	223	171	48	142.4	Figure 1	○
BD08CA1750	17.50	18.00	223	171	48	141.6	Figure 1	○
BD08CA1800	18.00	18.00	223	171	48	140.7	Figure 2	○
BD08CA1850	18.50	20.00	244	190	50	158.9	Figure 1	○
BD08CA1900	19.00	20.00	244	190	50	158.0	Figure 1	●
BD08CA1905	19.05	20.00	244	190	50	158.0	Figure 1	○
BD08CA1950	19.50	20.00	244	190	50	157.2	Figure 1	○
BD08CA2000	20.00	20.00	244	190	50	156.4	Figure 2	●

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

Cutting speed recommendations - BD08C Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	100	110	120
	Alloy steel	< 1200	< 350	80	90	100
	High-alloyed steel and tool steel	< 1400	< 380	60	70	80
M	Austenite and ferrite stainless steel	< 680	< 220	40	50	60
	Martensite stainless steel	< 820	< 240	40	50	60
K	Gray cast iron	-	< 280	180	200	220
	Nodular cast iron	-	< 320	140	160	180
N	Non-ferrous alloy	< 250	< 110	-	-	-
	Aluminum alloy	< 530	< 130	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	20	30	40
	Titanium alloy	< 2100	< 400	30	40	50
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - BD08C Series

Workpiece material	Feed per revolution mm/r										
	Φ2~Φ2.5	Φ2.5~Φ3	Φ3~Φ4	Φ4~Φ5	Φ5~Φ6	Φ6~Φ8	Φ8~Φ10	Φ10~Φ12	Φ12~Φ16	Φ16~Φ20	
P	Carbon steel	0.100	0.125	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500
	Alloy steel	0.080	0.100	0.125	0.125	0.160	0.200	0.250	0.250	0.315	0.400
	High-alloyed steel and tool steel	0.063	0.080	0.100	0.100	0.125	0.160	0.200	0.200	0.250	0.315
M	Austenite and ferrite stainless steel	0.050	0.063	0.080	0.080	0.100	0.125	0.160	0.160	0.200	0.250
	Martensite stainless steel	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
K	Gray cast iron	0.160	0.160	0.200	0.250	0.315	0.315	0.400	0.500	0.630	0.630
	Nodular cast iron	0.125	0.160	0.200	0.200	0.250	0.315	0.400	0.400	0.500	0.630
N	Non-ferrous alloy	-	-	-	-	-	-	-	-	-	-
	Aluminum alloy	-	-	-	-	-	-	-	-	-	-
S	Iron-based, nickel-based and cobalt-based high-temp alloy	0.050	0.063	0.080	0.080	0.080	0.125	0.160	0.160	0.200	0.250
	Titanium alloy	0.040	0.050	0.063	0.063	0.080	0.100	0.125	0.125	0.160	0.200
H	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-

A

General turning

Turning of small components

Parting and grooving

Indexable milling

Solid carbide end mill

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Indexable milling


Solid carbide end mill

Short hole drill

Solid carbide drill

Solid carbide drill

XD12C Series

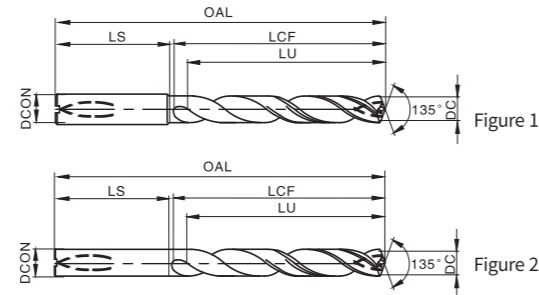

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD12CA0300	3.00	6	90	50	36	40	Figure 1	●
XD12CA0310	3.10	6	90	50	36	40	Figure 1	○
XD12CA0320	3.20	6	90	50	36	40	Figure 1	○
XD12CA0330	3.30	6	90	50	36	40	Figure 1	○
XD12CA0340	3.40	6	90	50	36	40	Figure 1	○
XD12CA0350	3.50	6	90	50	36	40	Figure 2	○
XD12CA0360	3.60	6	90	50	36	40	Figure 1	○
XD12CA0370	3.70	6	90	50	36	46	Figure 1	○
XD12CA0380	3.80	6	90	50	36	46	Figure 1	○
XD12CA0390	3.90	6	90	50	36	46	Figure 1	○
XD12CA0400	4.00	6	102	64	36	56	Figure 1	●
XD12CA0410	4.10	6	102	64	36	56	Figure 1	○
XD12CA0420	4.20	6	102	64	36	56	Figure 1	○
XD12CA0430	4.30	6	102	64	36	56	Figure 1	○
XD12CA0440	4.40	6	102	64	36	56	Figure 1	○
XD12CA0450	4.50	6	102	64	36	56	Figure 1	●
XD12CA0460	4.60	6	102	64	36	56	Figure 1	○
XD12CA0470	4.70	6	102	64	36	56	Figure 1	○
XD12CA0480	4.80	6	102	64	36	56	Figure 1	○
XD12CA0490	4.90	6	102	64	36	56	Figure 1	○
XD12CA0500	5.00	6	116	78	36	72	Figure 1	●
XD12CA0510	5.10	6	116	78	36	72	Figure 1	○
XD12CA0520	5.20	6	116	78	36	72	Figure 1	○
XD12CA0530	5.30	6	116	78	36	72	Figure 1	○
XD12CA0540	5.40	6	116	78	36	72	Figure 1	○
XD12CA0550	5.50	6	116	78	36	72	Figure 1	●
XD12CA0560	5.60	6	116	78	36	72	Figure 1	○
XD12CA0570	5.70	6	116	78	36	72	Figure 2	○

● Standing inventory ○ Make-to-order

XD12C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD12CA0580	5.80	6	116	78	36	72	Figure 1	○
XD12CA0590	5.90	6	116	78	36	72	Figure 1	○
XD12CA0600	6.00	6	116	78	36	72	Figure 1	●
XD12CA0610	6.10	8	131	93	36	84	Figure 1	○
XD12CA0620	6.20	8	131	93	36	84	Figure 1	○
XD12CA0630	6.30	8	131	93	36	84	Figure 1	○
XD12CA0640	6.40	8	131	93	36	84	Figure 1	○
XD12CA0650	6.50	8	131	93	36	84	Figure 1	●
XD12CA0660	6.60	8	131	93	36	84	Figure 1	○
XD12CA0670	6.70	8	131	93	36	84	Figure 1	○
XD12CA0680	6.80	8	131	93	36	84	Figure 1	○
XD12CA0690	6.90	8	131	93	36	84	Figure 1	○
XD12CA0700	7.00	8	131	93	36	84	Figure 2	●
XD12CA0710	7.10	8	146	108	36	96	Figure 1	○
XD12CA0720	7.20	8	146	108	36	96	Figure 1	○
XD12CA0730	7.30	8	146	108	36	96	Figure 1	○
XD12CA0740	7.40	8	146	108	36	96	Figure 1	○
XD12CA0750	7.50	8	146	108	36	96	Figure 1	●
XD12CA0760	7.60	8	146	108	36	96	Figure 1	○
XD12CA0770	7.70	8	146	108	36	96	Figure 1	○
XD12CA0780	7.80	8	146	108	36	96	Figure 2	○
XD12CA0790	7.90	8	146	108	36	96	Figure 1	○
XD12CA0800	8.00	8	146	108	36	96	Figure 1	●
XD12CA0810	8.10	10	162	120	40	108	Figure 1	○
XD12CA0820	8.20	10	162	120	40	108	Figure 1	○
XD12CA0830	8.30	10	162	120	40	108	Figure 1	○
XD12CA0840	8.40	10	162	120	40	108	Figure 1	○
XD12CA0850	8.50	10	162	120	40	108	Figure 1	●
XD12CA0860	8.60	10	162	120	40	108	Figure 2	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

XD12C Series

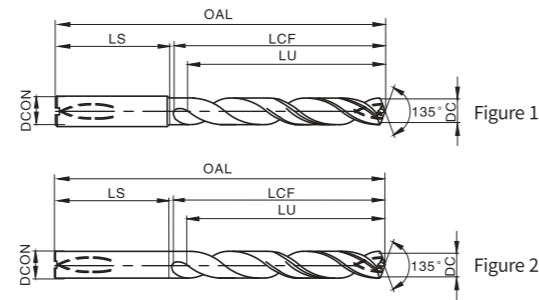

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD12CA0870	8.70	10	162	120	40	108	Figure 1	○
XD12CA0880	8.80	10	162	120	40	108	Figure 1	○
XD12CA0890	8.90	10	162	120	40	108	Figure 1	○
XD12CA0900	9.00	10	162	120	40	108	Figure 1	●
XD12CA0910	9.10	10	174	132	40	120	Figure 1	○
XD12CA0920	9.20	10	174	132	40	120	Figure 2	○
XD12CA0930	9.30	10	174	132	40	120	Figure 1	○
XD12CA0940	9.40	10	174	132	40	120	Figure 1	○
XD12CA0950	9.50	10	174	132	40	120	Figure 1	●
XD12CA0960	9.60	10	174	132	40	120	Figure 1	○
XD12CA0970	9.70	10	174	132	40	120	Figure 1	○
XD12CA0980	9.80	10	174	132	40	120	Figure 1	○
XD12CA0990	9.90	10	174	132	40	120	Figure 1	○
XD12CA1000	10.00	10	174	132	40	120	Figure 1	●
XD12CA1010	10.10	12	204	156	45	144	Figure 1	○
XD12CA1020	10.20	12	204	156	45	144	Figure 1	○
XD12CA1030	10.30	12	204	156	45	144	Figure 1	○
XD12CA1040	10.40	12	204	156	45	144	Figure 1	○
XD12CA1050	10.50	12	204	156	45	144	Figure 1	●
XD12CA1060	10.60	12	204	156	45	144	Figure 1	○
XD12CA1070	10.70	12	204	156	45	144	Figure 1	○
XD12CA1080	10.80	12	204	156	45	144	Figure 1	○
XD12CA1090	10.90	12	204	156	45	144	Figure 1	○
XD12CA1100	11.00	12	204	156	45	144	Figure 1	●
XD12CA1110	11.10	12	204	156	45	144	Figure 1	○
XD12CA1120	11.20	12	204	156	45	144	Figure 1	○
XD12CA1130	11.30	12	204	156	45	144	Figure 1	○
XD12CA1140	11.40	12	204	156	45	144	Figure 2	○

● Standing inventory ○ Make-to-order

XD12C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD12CA1150	11.50	12	204	156	45	144	Figure 1	●
XD12CA1160	11.60	12	204	156	45	144	Figure 1	○
XD12CA1170	11.70	12	204	156	45	144	Figure 1	○
XD12CA1180	11.80	12	204	156	45	144	Figure 1	○
XD12CA1190	11.90	12	204	156	45	144	Figure 1	○
XD12CA1200	12.00	12	204	156	45	144	Figure 1	●
XD12CA1250	12.50	14	230	182	45	168	Figure 1	●
XD12CA1270	12.70	14	230	182	45	168	Figure 1	○
XD12CA1280	12.80	14	230	182	45	168	Figure 1	○
XD12CA1300	13.00	14	230	182	45	168	Figure 1	○
XD12CA1350	13.50	14	230	182	45	168	Figure 1	●
XD12CA1400	14.00	14	230	182	45	168	Figure 1	●
XD12CA1450	14.50	16	260	208	48	194	Figure 2	○
XD12CA1500	15.00	16	260	208	48	194	Figure 1	○
XD12CA1550	15.50	16	260	208	48	194	Figure 1	○
XD12CA1600	16.00	16	260	208	48	194	Figure 1	○
XD12CA1650	16.50	18	286	234	48	218	Figure 1	○
XD12CA1700	17.00	18	286	234	48	218	Figure 1	○
XD12CA1750	17.50	18	286	234	48	218	Figure 1	○
XD12CA1800	18.00	18	286	234	48	218	Figure 1	○
XD12CA1850	18.50	20	310	258	48	240	Figure 2	○
XD12CA1900	19.00	20	310	258	48	240	Figure 1	○
XD12CA1950	19.50	20	310	258	48	240	Figure 1	○
XD12CA2000	20.00	20	310	258	48	240	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S	H			
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

▶ Cutting speed recommendations - XD12C Series


Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)		
			Minimum /min	Optimal /opt	Maximum /max
P Carbon steel	< 600	< 230	60	90	120
	Alloy steel	< 350	60	80	120
	High-alloyed steel and tool steel	< 380	50	70	80
M Austenite and ferrite stainless steel	< 680	<220	40	60	80
	Martensite stainless steel	< 240	40	50	80
K Gray cast iron	-	< 280	80	120	150
	Nodular cast iron	-	< 320	60	90
N Non-ferrous alloy	< 250	< 110	100	140	180
	Aluminum alloy	< 130	100	140	180
S Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	-	-	-
	Titanium alloy	<2100	< 400	-	-
H High hardness steel	-	< 54HRC	-	-	-
	-	52-60HRC	-	-	-
	-	> 60 HRC	-	-	-

▶ Recommended feed rate - XD12C Series

Workpiece material		Feed per revolution mm/r										
		Φ3	Φ4	Φ5	Φ6	Φ8	Φ10	Φ12	Φ14	Φ16	Φ18	Φ20
P	Carbon steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28	0.20-0.3	0.22-0.32	0.25-0.35
	Alloy steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28	0.20-0.3	0.22-0.32	0.25-0.35
	High-alloyed steel and tool steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28	0.20-0.3	0.22-0.32	0.25-0.35
M	Austenite and ferrite stainless steel	0.03-0.07	0.04-0.08	0.05-0.1	0.06-0.12	0.08-0.16	0.1-0.18	0.12-0.2	0.13-0.22	0.14-0.25	0.15-0.28	0.16-0.3
	Martensite stainless steel	0.03-0.07	0.04-0.08	0.05-0.1	0.06-0.12	0.08-0.16	0.1-0.18	0.12-0.2	0.13-0.22	0.14-0.25	0.15-0.28	0.16-0.3
K	Gray cast iron	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28	0.20-0.30	0.22-0.32	0.25-0.35
	Nodular cast iron	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28	0.20-0.30	0.22-0.32	0.25-0.35
N	Non-ferrous alloy	0.09-0.12	0.1-0.15	0.1-0.15	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.25	0.18-0.28	0.25-0.36	0.28-0.38	0.30-0.40
	Aluminum alloy	0.09-0.12	0.1-0.15	0.1-0.15	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.25	0.18-0.28	0.25-0.36	0.28-0.38	0.30-0.40
S	Iron-based, nickel-based and cobalt-based high-temp alloy	-	-	-	-	-	-	-	-	-	-	-
	Titanium alloy	-	-	-	-	-	-	-	-	-	-	-
H	High hardness steel	-	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-	-	-	-

Solid carbide drill

XD20C Series

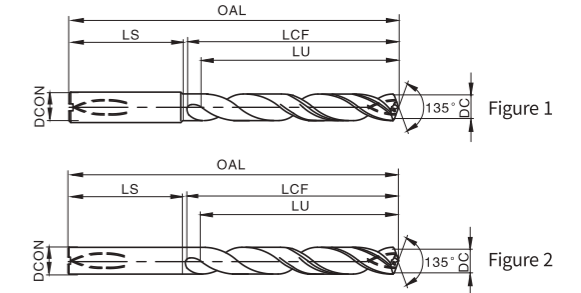


Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD20CA0300	3.0	6	110	70	36	62	Figure 1	○
XD20CA0310	3.1	6	123	83	36	72	Figure 1	○
XD20CA0320	3.2	6	123	83	36	72	Figure 1	○
XD20CA0330	3.3	6	123	83	36	72	Figure 1	○
XD20CA0340	3.4	6	123	83	36	72	Figure 1	○
XD20CA0350	3.5	6	123	83	36	72	Figure 2	○
XD20CA0360	3.6	6	136	96	36	84	Figure 1	○
XD20CA0370	3.7	6	136	96	36	84	Figure 1	○
XD20CA0380	3.8	6	136	96	36	84	Figure 1	○
XD20CA0390	3.9	6	136	96	36	84	Figure 1	○
XD20CA0400	4.0	6	136	96	36	84	Figure 1	○
XD20CA0410	4.1	6	148	108	36	96	Figure 1	○
XD20CA0420	4.2	6	148	108	36	96	Figure 1	○
XD20CA0430	4.3	6	148	108	36	96	Figure 1	○
XD20CA0440	4.4	6	148	108	36	96	Figure 1	○
XD20CA0450	4.5	6	148	108	36	96	Figure 1	○
XD20CA0460	4.6	6	158	118	36	106	Figure 1	○
XD20CA0470	4.7	6	158	118	36	106	Figure 1	○
XD20CA0480	4.8	6	158	118	36	106	Figure 1	○
XD20CA0490	4.9	6	158	118	36	106	Figure 1	○
XD20CA0500	5.0	6	158	118	36	106	Figure 1	○
XD20CA0510	5.1	6	168	128	36	116	Figure 1	○
XD20CA0520	5.2	6	168	128	36	116	Figure 1	○
XD20CA0530	5.3	6	168	128	36	116	Figure 1	○
XD20CA0540	5.4	6	168	128	36	116	Figure 1	○
XD20CA0550	5.5	6	168	128	36	116	Figure 1	○
XD20CA0560	5.6	6	180	140	36	126	Figure 1	○
XD20CA0570	5.7	6	180	140	36	126	Figure 2	○

● Standing inventory ○ Make-to-order

A General turning
 B Turing of small components
 C Parting and grooving
 D Threading
 E Indexable milling
 F Solid carbide end mill
 G Short hole drill
 H Solid carbide drill

A General turning
 B Turing of small components
 C Parting and grooving
 D Threading
 E Indexable milling
 F Solid carbide end mill
 G Short hole drill
 H Solid carbide drill

XD20C Series

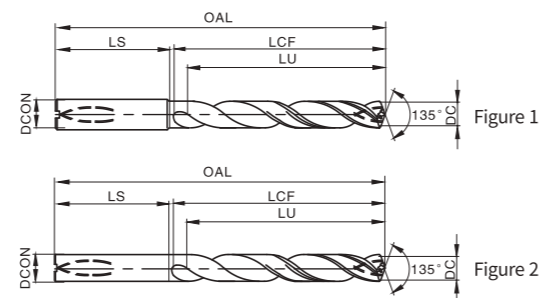

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD20CA0580	5.8	6	180	140	36	126	Figure 1	○
XD20CA0590	5.9	6	180	140	36	126	Figure 1	○
XD20CA0600	6.0	6	180	140	36	126	Figure 1	○
XD20CA0610	6.1	8	192	150	36	132	Figure 1	○
XD20CA0620	6.2	8	192	150	36	132	Figure 1	○
XD20CA0630	6.3	8	192	150	36	132	Figure 2	○
XD20CA0640	6.4	8	192	150	36	132	Figure 1	○
XD20CA0650	6.5	8	192	150	36	132	Figure 1	○
XD20CA0660	6.6	8	202	162	36	144	Figure 1	○
XD20CA0670	6.7	8	202	162	36	144	Figure 1	○
XD20CA0680	6.8	8	202	162	36	144	Figure 1	○
XD20CA0690	6.9	8	202	162	36	144	Figure 1	○
XD20CA0700	7.0	8	202	162	36	144	Figure 1	○
XD20CA0710	7.1	8	213	173	36	155	Figure 1	○
XD20CA0720	7.2	8	213	173	36	155	Figure 1	○
XD20CA0730	7.3	8	213	173	36	155	Figure 1	○
XD20CA0740	7.4	8	213	173	36	155	Figure 1	○
XD20CA0750	7.5	8	213	173	36	155	Figure 1	○
XD20CA0760	7.6	8	223	183	36	165	Figure 1	○
XD20CA0770	7.7	8	223	183	36	165	Figure 1	○
XD20CA0780	7.8	8	223	183	36	165	Figure 1	○
XD20CA0790	7.9	8	223	183	36	165	Figure 1	○
XD20CA0800	8.0	8	223	183	36	165	Figure 1	○
XD20CA0810	8.1	10	239	195	40	176	Figure 1	○
XD20CA0820	8.2	10	239	195	40	176	Figure 1	○
XD20CA0830	8.3	10	239	195	40	176	Figure 1	○
XD20CA0840	8.4	10	239	195	40	176	Figure 1	○
XD20CA0850	8.5	10	239	195	40	176	Figure 2	○

● Standing inventory ○ Make-to-order

XD20C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD20CA0860	8.6	10	249	205	40	186	Figure 2	○
XD20CA0870	8.7	10	249	205	40	186	Figure 1	○
XD20CA0880	8.8	10	249	205	40	186	Figure 1	○
XD20CA0890	8.9	10	249	205	40	186	Figure 1	○
XD20CA0900	9.0	10	249	205	40	186	Figure 1	○
XD20CA0910	9.1	10	262	218	40	196	Figure 1	○
XD20CA0920	9.2	10	262	218	40	196	Figure 2	○
XD20CA0930	9.3	10	262	218	40	196	Figure 1	○
XD20CA0940	9.4	10	262	218	40	196	Figure 1	○
XD20CA0950	9.5	10	262	218	40	196	Figure 1	○
XD20CA0960	9.6	10	272	228	40	206	Figure 1	○
XD20CA0970	9.7	10	272	228	40	206	Figure 1	○
XD20CA0980	9.8	10	272	228	40	206	Figure 1	○
XD20CA0990	9.9	10	272	228	40	206	Figure 1	○
XD20CA1000	10.0	10	272	228	40	206	Figure 1	○
XD20CA1010	10.1	12	292	242	45	220	Figure 1	○
XD20CA1020	10.2	12	292	242	45	220	Figure 1	○
XD20CA1030	10.3	12	292	242	45	220	Figure 1	○
XD20CA1040	10.4	12	292	242	45	220	Figure 1	○
XD20CA1050	10.5	12	292	242	45	220	Figure 1	○
XD20CA1060	10.6	12	300	250	45	228	Figure 1	○
XD20CA1070	10.7	12	300	250	45	228	Figure 1	○
XD20CA1080	10.8	12	300	250	45	228	Figure 1	○
XD20CA1090	10.9	12	300	250	45	228	Figure 1	○
XD20CA1100	11.0	12	300	250	45	228	Figure 1	○
XD20CA1110	11.1	12	315	265	45	240	Figure 1	○
XD20CA1120	11.2	12	315	265	45	240	Figure 1	○
XD20CA1130	11.3	12	315	265	45	240	Figure 1	○
XD20CA1140	11.4	12	315	265	45	240	Figure 2	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

XD20C Series

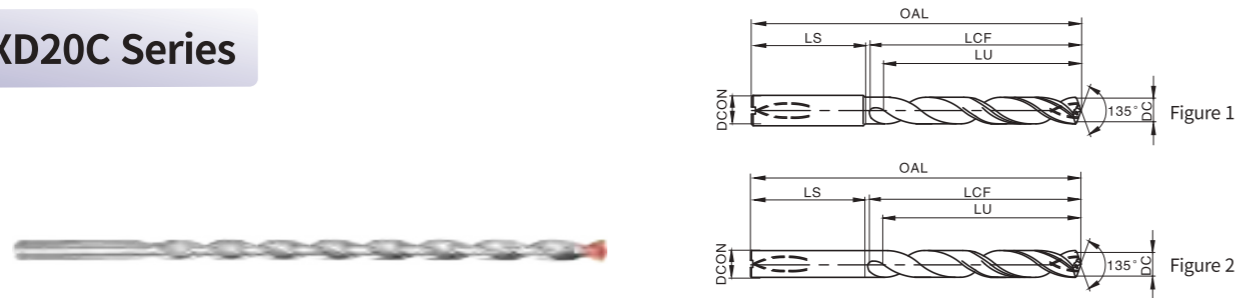

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD20CA1150	11.5	12	315	265	45	240	Figure 1	○
XD20CA1160	11.6	12	325	275	45	250	Figure 1	○
XD20CA1170	11.7	12	325	275	45	250	Figure 1	○
XD20CA1180	11.8	12	325	275	45	250	Figure 1	○
XD20CA1190	11.9	12	325	275	45	250	Figure 1	○
XD20CA1200	12.0	12	325	275	45	250	Figure 1	○
XD20CA1250	12.5	14	323	275	45	250	Figure 1	○
XD20CA1300	13.0	14	338	290	45	265	Figure 1	○
XD20CA1350	13.5	14	338	290	45	265	Figure 1	○
XD20CA1400	14.0	14	367	318	45	290	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀			

☀ Fit well ☀ Applicable

Cutting speed recommendations - XD20C Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	50	70	80
	Alloy steel	< 1200	< 350	50	60	80
	High-alloyed steel and tool steel	< 1400	< 380	40	50	60
M	Austenite and ferrite stainless steel	< 680	< 220	40	50	60
	Martensite stainless steel	< 820	< 240	40	50	60
K	Gray cast iron	-	< 280	50	60	80
	Nodular cast iron	-	< 320	60	70	80
N	Non-ferrous alloy	< 250	< 110	100	140	180
	Aluminum alloy	< 530	< 130	100	150	180
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	-	-	-
	Titanium alloy	< 2100	< 400	-	-	-
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - XD20C Series

Workpiece material	Feed per revolution mm/r								
	Φ3	Φ4	Φ5	Φ6	Φ8	Φ10	Φ12	Φ14	
P	Carbon steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28
	Alloy steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28
	High-alloyed steel and tool steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28
M	Austenite and ferrite stainless steel	0.03-0.07	0.04-0.08	0.05-0.1	0.06-0.12	0.08-0.16	0.1-0.18	0.12-0.2	0.13-0.22
	Martensite stainless steel	0.03-0.07	0.04-0.08	0.05-0.1	0.06-0.12	0.08-0.16	0.1-0.18	0.12-0.2	0.13-0.22
K	Gray cast iron	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28
	Nodular cast iron	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.24	0.18-0.28
N	Non-ferrous alloy	0.09-0.12	0.1-0.15	0.1-0.15	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.25	0.18-0.28
	Aluminum alloy	0.09-0.12	0.1-0.15	0.1-0.15	0.11-0.16	0.13-0.19	0.14-0.22	0.16-0.25	0.18-0.28
S	Iron-based, nickel-based and cobalt-based high-temp alloy	-	-	-	-	-	-	-	-
	Titanium alloy	-	-	-	-	-	-	-	-
H	High hardness steel	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-	-	-

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill


C

Short hole drill

Solid carbide drill

Solid carbide drill

XD30C Series

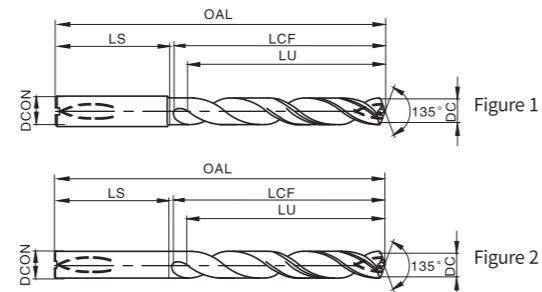

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD30CA0300	3.0	6	140	100	36	92	Figure 1	○
XD30CA0310	3.1	6	160	120	36	108	Figure 1	○
XD30CA0320	3.2	6	160	120	36	108	Figure 1	○
XD30CA0330	3.3	6	160	120	36	108	Figure 1	○
XD30CA0340	3.4	6	160	120	36	108	Figure 1	○
XD30CA0350	3.5	6	160	120	36	108	Figure 2	○
XD30CA0360	3.6	6	176	136	36	124	Figure 1	○
XD30CA0370	3.7	6	176	136	36	124	Figure 1	○
XD30CA0380	3.8	6	176	136	36	124	Figure 1	○
XD30CA0390	3.9	6	176	136	36	124	Figure 1	○
XD30CA0400	4.0	6	176	136	36	124	Figure 1	○
XD30CA0410	4.1	6	192	152	36	140	Figure 1	○
XD30CA0420	4.2	6	192	152	36	140	Figure 1	○
XD30CA0430	4.3	6	192	152	36	140	Figure 1	○
XD30CA0440	4.4	6	192	152	36	140	Figure 1	○
XD30CA0450	4.5	6	192	152	36	140	Figure 1	○
XD30CA0460	4.6	6	208	168	36	156	Figure 1	○
XD30CA0470	4.7	6	208	168	36	156	Figure 1	○
XD30CA0480	4.8	6	208	168	36	156	Figure 1	○
XD30CA0490	4.9	6	208	168	36	156	Figure 1	○
XD30CA0500	5.0	6	208	168	36	156	Figure 1	○
XD30CA0510	5.1	6	228	188	36	170	Figure 1	○
XD30CA0520	5.2	6	228	188	36	170	Figure 1	○
XD30CA0530	5.3	6	228	188	36	170	Figure 1	○
XD30CA0540	5.4	6	228	188	36	170	Figure 1	○
XD30CA0550	5.5	6	228	188	36	170	Figure 1	○
XD30CA0560	5.6	6	240	200	36	182	Figure 1	○
XD30CA0570	5.7	6	240	200	36	182	Figure 2	○

● Standing inventory ○ Make-to-order

XD30C Series

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD30CA0580	5.8	6	240	200	36	182	Figure 1	○
XD30CA0590	5.9	6	240	200	36	182	Figure 1	○
XD30CA0600	6.0	6	240	200	36	182	Figure 1	○
XD30CA0610	6.1	8	260	220	36	202	Figure 1	○
XD30CA0620	6.2	8	260	220	36	202	Figure 1	○
XD30CA0630	6.3	8	260	220	36	202	Figure 1	○
XD30CA0640	6.4	8	260	220	36	202	Figure 1	○
XD30CA0650	6.5	8	260	220	36	202	Figure 1	○
XD30CA0660	6.6	8	272	232	36	214	Figure 1	○
XD30CA0670	6.7	8	272	232	36	214	Figure 1	○
XD30CA0680	6.8	8	272	232	36	214	Figure 1	○
XD30CA0690	6.9	8	272	232	36	214	Figure 1	○
XD30CA0700	7.0	8	272	232	36	214	Figure 2	○
XD30CA0710	7.1	8	290	250	36	232	Figure 1	○
XD30CA0720	7.2	8	290	250	36	232	Figure 1	○
XD30CA0730	7.3	8	290	250	36	232	Figure 1	○
XD30CA0740	7.4	8	290	250	36	232	Figure 1	○
XD30CA0750	7.5	8	290	250	36	232	Figure 1	○
XD30CA0760	7.6	8	305	265	36	246	Figure 1	○
XD30CA0770	7.7	8	305	265	36	246	Figure 1	○
XD30CA0780	7.8	8	305	265	36	246	Figure 2	○
XD30CA0790	7.9	8	305	265	36	246	Figure 1	○
XD30CA0800	8.0	8	305	265	36	246	Figure 1	○
XD30CA0810	8.1	10	330	285	40	265	Figure 1	○
XD30CA0820	8.2	10	330	285	40	265	Figure 1	○
XD30CA0830	8.3	10	330	285	40	265	Figure 1	○
XD30CA0840	8.4	10	330	285	40	265	Figure 1	○
XD30CA0850	8.5	10	330	285	40	265	Figure 1	○
XD30CA0860	8.6	10	340	295	40	275	Figure 2	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloyed steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☼	☼	☼	☼	☼			☼	☼			

☼ Fit well ☼ Applicable

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C

Short hole drill

Solid carbide drill

XD30C Series

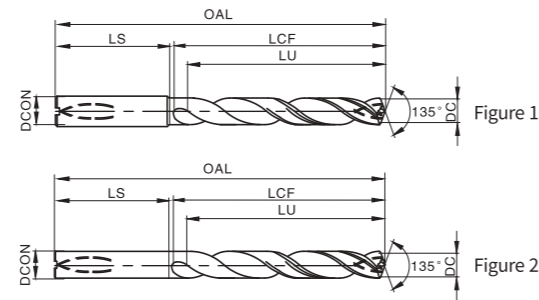

Order number	Dimension (mm)						Pattern	Inventory
	DC	DCON	OAL	LCF	LS	LU		
XD30CA0870	8.7	10	340	295	40	275	Figure 1	○
XD30CA0880	8.8	10	340	295	40	275	Figure 1	○
XD30CA0890	8.9	10	340	295	40	275	Figure 1	○
XD30CA0900	9.0	10	340	295	40	275	Figure 1	○
XD30CA0910	9.1	10	360	315	40	292	Figure 1	○
XD30CA0920	9.2	10	360	315	40	292	Figure 2	○
XD30CA0930	9.3	10	360	315	40	292	Figure 1	○
XD30CA0940	9.4	10	360	315	40	292	Figure 1	○
XD30CA0950	9.5	10	360	315	40	292	Figure 1	○
XD30CA0960	9.6	10	372	328	40	305	Figure 1	○
XD30CA0970	9.7	10	372	328	40	305	Figure 1	○
XD30CA0980	9.8	10	372	328	40	305	Figure 1	○
XD30CA0990	9.9	10	372	328	40	305	Figure 1	○
XD30CA1000	10.0	10	372	328	40	305	Figure 1	○

● Standing inventory ○ Make-to-order

P			M	K	N		S		H		
Carbon steel	Alloy steel	High-alloy steel	Stainless steel	Cast iron	Non-ferrous alloy	Aluminum alloy	High-temp alloy	Titanium alloy	<54HRC	54-60HRC	≥60HRC
☀	☀	☀	☀	☀			☀	☀			

☀ Fit well ☀ Applicable

Cutting speed recommendations - XD30C Series

Workpiece material	Strength (N/mm ²)	Hardness (HB/HRC)	Cutting speed (m/min)			
			Minimum /min	Optimal /opt	Maximum /max	
P	Carbon steel	< 600	< 230	50	70	80
	Alloy steel	< 1200	< 350	50	60	80
	High-alloyed steel and tool steel	< 1400	< 380	40	50	60
M	Austenite and ferrite stainless steel	< 680	< 220	40	50	60
	Martensite stainless steel	< 820	< 240	40	50	60
K	Gray cast iron	-	< 280	50	60	80
	Nodular cast iron	-	< 320	60	70	80
N	Non-ferrous alloy	< 250	< 110	100	140	180
	Aluminum alloy	< 530	< 130	100	150	180
S	Iron-based, nickel-based and cobalt-based high-temp alloy	< 3300	< 350	-	-	-
	Titanium alloy	< 2100	< 400	-	-	-
H	High hardness steel	-	< 54HRC	-	-	-
	High hardness steel	-	52-60HRC	-	-	-
	High hardness steel	-	> 60 HRC	-	-	-

Recommended feed rate - XD30C Series

Workpiece material	Feed per revolution mm/r						
	Φ3	Φ4	Φ5	Φ6	Φ8	Φ10	
P	Carbon steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22
	Alloy steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22
	High-alloyed steel and tool steel	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22
M	Austenite and ferrite stainless steel	0.03-0.07	0.04-0.08	0.05-0.1	0.06-0.12	0.08-0.16	0.1-0.18
	Martensite stainless steel	0.03-0.07	0.04-0.08	0.05-0.1	0.06-0.12	0.08-0.16	0.1-0.18
K	Gray cast iron	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22
	Nodular cast iron	0.06-0.1	0.08-0.12	0.1-0.14	0.11-0.16	0.13-0.19	0.14-0.22
N	Non-ferrous alloy	0.09-0.12	0.1-0.15	0.1-0.15	0.11-0.16	0.13-0.19	0.14-0.22
	Aluminum alloy	0.09-0.12	0.1-0.15	0.1-0.15	0.11-0.16	0.13-0.19	0.14-0.22
S	Iron-based, nickel-based and cobalt-based high-temp alloy	-	-	-	-	-	-
	Titanium alloy	-	-	-	-	-	-
H	High hardness steel	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-
	High hardness steel	-	-	-	-	-	-

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turing of small components

Parting and grooving

Threading

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Technical information of solid carbide drills

FAQs of hole drilling

	Phenomenon	Causes	Solutions
Hole	Oversize holes	Poor clamping Large run-out around spindle	Select the holder and chuck with high precision Check and adjust after clamping drill
		Asymmetric point angle Large run-out of the drill bit Chisel edge is off center	Regrind the tool Check the accuracy after regrinding
	Low position accuracy	Asymmetric point angle Large run-out of the drill bit Chisel edge is off center Excessive margin abrasion	Select the holder and chuck with high precision Check and adjust after clamping drill
		Poor clamping Large run-out around the spindle Poor workpiece clamping	Select the holder and chuck with high precision Check and adjust after clamping drill
		Excessive feed rate	Reduce the feed rate
		Insufficient supply of cutting fluid	Change the cutting fluid supply method to increase the flow rate
	Irregular hole size	Low re-positioning accuracy of spindle Poor clamping Large run-out around the spindle	Increase the re-positioning accuracy of the machine tool Select the holder and chuck with high precision Check and adjust after clamping drill
		The machined surface is not perpendicular to the feed direction	Adjust the machined surface to be perpendicular to the feed direction
		The center does not align with the axis (lathe)	Carefully adjust it before machining
	Poor linearity Poor perpendicularity	Excessive wear of the tool	Regrind the tool
		Poor accuracy of the center hole	Improve the position accuracy of the center hole
		Asymmetric point angle Large run-out of the drill bit Chisel edge is off-center	Regrind the tool Check the accuracy after regrinding
		Poor rigidity of the drill bit	Improve the drill bit rigidity
			Uneven workpiece surface The center does not align with the axis (lathe)

	Phenomenon	Causes	Solutions
Hole	Poor roundness	Asymmetric point angle Large run-out of the drill bit Chisel edge is off-center	Regrind the tool Check the accuracy after grinding
		Poor clamping Large run-out around the spindle Poor workpiece clamping	Select the holder and chuck with high precision Check and adjust after clamping drill
		Too large clearance angle	Regrind the cutting edge
		Poor rigidity of the drill bit	Improve the drill bit rigidity
	Poor surface quality of the machined workpiece	Improper regrinding	Regrind and correct
		Insufficient cutting fluid supply or mismatched model	Change the cutting fluid supply method to increase the flow rate Use the cutting oil with good lubricity
		Poor clamping Large run-out around the spindle	Select the holder and chuck with high precision Calibrating spindle
		Feed rate is too high	Reduce the feed rate
		Excessive wear of the cutting edge Excessive build-up on margin	Regrind the cutting edge Use coated drill bit
		Chip jamming	Reselect a drill bit (chip-hold groove type, helical angle, etc.) Reselect the machining method (Adjust the feed rate, e.g. using step-by-step method)
	Poor cylindricity	Asymmetric point angle Large run-out of the drill bit Chisel edge off-center Excessive abrasion on cutting edge	Regrind the tool Check the accuracy after grinding
		Feed rate is too low	Increase the feed rate

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C71

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

C72

Non-standard customization of solid carbide drills



Customized tools: a good solution for process optimization and efficiency improvement

Client name:	No.68 Chuangye 2nd RD., Lusong District, Zhuzhou, Hunan, P.R.China	
Fax:	Tel.: 0731-28216690	
Tel.:	Fax: 0731-22286653	
E-MAIL:	E-mail: zzhrhj@163.com	
	Postal code: 412000	
	Website: www.huareal.com.cn	

Information of the machined hole

Blind hole	Orifice chamfering of the blind hole	Through-hole	Orifice chamfering of the through-hole	Step hole	Orifice chamfering of the step hole

Process condition

<input type="checkbox"/> Solid drilling		<input type="checkbox"/> Prepared hole	
		Size of prepared hole:	

Workpiece information

Workpiece material:	Hardness (HRC/HB):	Sketches or drawings of machined parts will be needed if the above workpiece types cannot be described in detail.
Hole diameter:	Hole tolerance:	
Hole depth:	Roughness:	

Tool type

Twist drill Straight fluted drill Step twist drill Step straight fluted drill Three-flute drill Others

Shank Type

Straight shank Straight shank (DIN 6535HA) Shank with flat (DIN 6535HB) Others

Machine Tool Information

Name: _____ Model: _____

Horizontal machining center Vertical machining center Drilling machine Special machine Others

Chuck type: Hydraulic pressure Thermal expansion Spring Side-pressure type Others

Cooling method: Internal cooling External cooling

Sketch of Components or Machining Parts: _____

Current tool manufacturer: _____

Tool model: _____

Tool machining rotating speed: _____

Tool machining feed: _____

Order quantity: _____ Piece Expected delivery date: MM/ DD/ YYYY

Date: _____ Signature: _____

Non-standard customization of solid carbide reamers



Customized tools: a good solution for process optimization and efficiency improvement

Client name:	No.68 Chuangye 2nd RD., Lusong District, Zhuzhou, Hunan, P.R.China	
Fax:	Tel.: 0731-28216690	
Tel.:	Fax: 0731-22286653	
E-MAIL:	E-mail: zzhrhj@163.com	
	Postal code: 412000	
	Website: www.huareal.com.cn	

Information of the machined hole

Shape of machined hole:

Through-hole Blind hole

Size of machined hole (mm): _____

Tolerance of machined hole: _____

Depth of machined hole (mm): _____

Workpiece information

Grey cast iron Grade of machined material: _____

Ductile iron Tensile strength= _____ N/mm²

Aluminum alloy Hardness (HRC/HB)= _____

Silicoaluminum Si<10%

Silicoaluminum Si≥10%

Tool information

Tool rotation direction	Cooling requirements
<input type="checkbox"/> Dextral rotation	<input type="checkbox"/> Internal cooling
<input type="checkbox"/> Straight Fluted	<input type="checkbox"/> External cooling
<input type="checkbox"/> Sinistral rotation	

Coating

Yes No

Cutting edge angle type

45° 45°/15° 30° <30°

Note: _____

Order quantity: _____ Piece Expected delivery date: MM/ DD/ YYYY

Date: _____ Signature: _____

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Possible safety problems and protective measures in using cutting tools

Possible Safety Problems	Protective Measures
Casualty can be caused by clothes, gloves, long hair, etc. twisting into high-speed equipment during rotary cutting.	Please do not wear gloves during rotary cutting. Please hide your long hair in the working cap. Caution to prevent clothes and other items from contacting any rotating parts.
Injury can be caused by attachments flying out due to the cutting tool damage caused by improper use.	Read this catalogue and the Safety Standards before using. Please wear protective glasses and protective suits.
Human injury can be caused by direct contact with the sharp edge of the tools.	Please wear labor protection appliances such as gloves when handling cutting tools.
Scratches and scalds can be caused by chips produced during cutting.	Remove chips in time by cleaning tools. Please wear protective glasses, suits and gloves.
Scratches are likely to be caused by defects, such as burrs, on the machined workpieces.	Do not touch defects such as burrs on any machined workpieces. Please wear protective appliances such as protective suits and gloves
Tool damage and machined workpiece spatter can be caused by cutting without tight clamping.	The workpieces must be clamped tightly. Please wear protective glasses, suits and gloves.
Injury can be caused by tools falling off and flying out due to cutting without clamping the insert or its attachments tightly.	Make sure that the inserts and other attachments have been fastened properly with appropriate tools before machining.
Injury can be caused by high-speed chips when cutting at high speed.	Use safety hood, protective screen, outer cover, etc. Please wear protective glasses, suits and gloves.
Injury can be caused by the insert or its attachments falling off and flying out due to inertial centrifugal force at high speed.	Please use the tools according to the recommended purposes. Please wear protective glasses and protective suits.
Scratches to hand can be caused by direct touching on the sharp edge of milling tools.	Please wear labor protection appliances such as gloves when contacting cutting tools.
Injury to operators can be caused by tool damage and spatter due to any dramatical increase of cutting resistance caused by excessive wear and severe impact.	Replace any worn tools in time. Please wear protective glasses and protective suits.
Fire and explosion can be caused by sparks and high-temperature chips produced during cutting.	Remove inflammables and explosives from the processing workshop. Prepare fire extinguishers.
Tool damage can be caused by intense vibration of high-speed machine tools due to the poor balance of clamps and other attachments.	Check the equipment for looseness or abnormal sound before cutting. Please wear protective glasses and protective suits.
Damage and spatter of inserts or tools can be caused by excessive fastening using auxiliary tools such as screw pin or pressure plate.	Do not tighten excessively by auxiliary tools such as casing.
Damage and scattering can be caused by shaking or vibration of the tools with eccentric rotating or poor balance when rotary machining.	Please use the tools within the restricted rotating speed range. Check the balance performance of the machine regularly.
Drilling with very small tools can easily cause the tool to break, splash and fail to be taken out.	Reduce the tool vibration and process at a suitable running speed. Please wear protective glasses, suits and gloves.
Increased wear of machine and cutting tools as well as other harms can be caused beyond the specified purposes.	Please follow the instructions and regulations.
Note: Incidents caused by any modification or diversion of cutting tools without the permission of our company will be at your own risk.	

Comparison table of cutting materials

Country Region	Europe	Germany	UK	Sweden	The United States	France	Italy	Spain	Japan	
Standard	DIN EN	W.-nr	BS EN	SS	AISI	AFNOR	UNI	UNE	JIS	
Non-alloyed steel										
	S235JR G2	1.0038	4360 40 C	-	1311	A570.36	E 24-2 Ne	-	-	STKM 12A;C
	S235J2 G3	1.0116	4360 40 B	-	1312	A573-81 65	E 24-U	Fe37-3	-	-
	C15	1.0401	080M15	-	1350	1015	CC12	C15C16	F.111	-
	C22	1.0402	050A20	2C/2D	1450	1020	CC20	C20C21	F.112	-
	C15E	1.1141	080M15	32C	1370	1015	XC12	C16	C15K	S15C
	C25E	1.1158	-	-	-	1025	-	-	-	S25C
	S380N	1.89	4360 55 E	-	2145	A572-60	-	FeE390KG	-	-
	17MnV7	1.087	4360 55 E	-	2142	A572-60	NFA 35-501 E 36	-	-	-
	55Si7	1.0904	250A53	45	2085	9255	55S7	55Si8	56Si7	-
	-	-	-	-	2090	9255	55S7	-	-	-
	C35	1.0501	060A35	-	1550	1035	CC35	C35	F.113	-
	C45	1.0503	080M46	-	1650	1045	CC45	C45	F.114	-
	40Mn4	1.1157	150M36	15	-	1039	35M5	-	-	-
	36Mn5	1.1167	-	-	2120	1335	40M5	-	36Mn5	SMn438(H)
	28Mn6	1.117	150M28	14A	-	1330	20M5	C28Mn	-	SCMn1
	C35G	1.1183	060A35	-	1572	1035	XC38TS	C36	-	S35C
	C45E	1.1191	080M46	-	1672	1045	XC42	C45	C45K	S45C
	C53G	1.1213	060A52	-	1674	1050	XC48TS	C53	-	S50C
	C55	1.0535	070M55	-	1655	1055	-	C55	-	-
	C55E	1.1203	070M55	-	-	1055	XC55	C50	C55K	S55C
	S275J2G3	1.0144	4360 43C	-	1412	A573-81	E 28-3	-	-	SM 400A;B;C
	S355J2G3+C2	1.057	4360 50B	-	2132	-	E36-3	Fe52BFN/Fe52CFN	-	SM490A;B;C;YA;YB
	S355J2G3	1.0841	150 M 19	-	2172	5120	20 MC 5	Fe52	F-431	-
	C60E	1.0601	080A62	43D	-	1060	CC55	C60	-	-
	C60E	1.1221	080A62	43D	1678	1060	XC60	C60	-	S58C
	C101E	1.1274	060 A 96	-	1870	1095	XC 100	-	F-5117	-
	C101u	1.1545	BW 1A	-	1880	W 1	Y105	C36KU	F-5118	SK 3
	C105W1	-	BW2	-	2900	W210	Y120	C120KU	F.515	SUP4
	S340 MGC	1.0961	-	-	-	9262	60SC7	60SiCr8	60SiCr8	-
	11SMn30	1.0715	230M07	-	1912	1213	S250	CF9SMn28	11SMn28	SUM22
	11SMnPb30	1.0718	-	-	1914	12L13	S250Pb	CF9SMnPb28	11SMnPb28	SUM22L
	10SPb20	1.0722	-	-	-	-	10PbF2	CF10SPb20	10SPb20	-
	11SMn37	1.0736	240M07	1B	-	1215	S 300	CF9SMn36	12SMn35	-
	11SMnPb37	1.0737	-	-	1926	12L14	S300Pb	CF9SMnPb36	12SMnP35	-
	35S20	1.0726	212M36	8M	1957	1140	35MF4	-	F210G	-
	GC16E	1.1142	030A04	1A	1325	1115	-	-	-	-
Low-alloyed steel										
	16Mo3	1.5415	1501-240	-	2912	A204Gr.A	15D3	16Mo3KW	16Mo3	-
	14Ni6	1.5622	-	-	-	A350LF5	16N6	14Ni6	15Ni6	-
	21NiCrMo2	1.6523	805M20	362	2506	8620	20NCD2	20NiCrMo2	20NiCrMo2	SNCM220(H)
	17CrNiMo6	1.6587	820A16	-	-	-	18NCD6	-	14NiCrMo13	-
	15Cr3	1.7015	523M15	-	-	5015	12C3	-	-	SCR415(H)
	55Cr3	1.7176	527A60	48	-	5155	55C3	-	-	SUP9(A)
	15CrMo5	1.7262	-	-	2216	-	12CD4	-	12CrMo4	SCM415(H)

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

D2

A

General turning

Turing of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

D3

Comparison table of cutting materials

Country/Region	Europe	Germany	UK		Sweden	The United States	France	Italy	Spain	Japan
Standard	DIN EN	W.-nr	BS	EN	SS	AISI	AFNOR	UNI	UNE	JIS
Low-alloyed steel										
	13CrMo4-5	1.7335	1501-620Gr27	-	-	A182 F11;F12	15CD3.5	14CrMo4 5	14CrMo45	-
							15CD4.5			
	10CrMo9 10	1.738	1501-622 Gr.31;45	-	2218	A182 F.22	12CD9, 10	12CrMo9, 10	TU.H	-
	14MoV6 3	1.7715	1503-660-440	-	-	-	-	-	13MoCrV6	-
	50CoMo4	1.7228	823M30	33	2512	-	-	653M31	-	-
	14NiCr10	1.5732	-	-	-	3415	14NC11	16NiCr11	15NiCr11	SNC415(H)
	14NiCr14	1.6582	655M13; A12	36A	-	3415;3310	12NC15	-	-	SNC815(H)
	16MnCr5	1.7131	(527M20)	-	2511	5115	16MC5	16MnCr5	16MnCr5	-
	34CrMo4	1.722	708A37	19B	2234	4137;4135	35CD4	35CrMo4	34CrMo4	SCM432;SCCRM3
	41CrMo4	1.7223	708M40	19A	2244	4140;4142	42CD4TS	41CrMo4	42CrMo4	SCM 440
	42CrMo4	1.7225	708M40	19A	2244	4140	42CD4	42CrMo4	42CrMo4	SCM440(H)
	14NiCrMo134	1.6657	832M13	36C	-	-	-	15NiCrMo13	14NiCrMo131	-
	31CrMo12	1.8515	722 M 24	-	2240	-	30 CD 12	30CrMo12	F-1712	-
	39CrMoV13 9	1.8523	897M39	40C	-	-	-	36CrMoV12	-	-
	41CrS4	1.7039	524A14	-	2092	L1	-	105WCR 5	-	-
	50NiCr13	1.2721	-	-	2550	L6	55NCV6	-	F-528	-
	45WCrV7	1.2542	BS1	-	2710	S1	-	45WCrV8KU	45WCrSi8	-
	36CrNiMo4	1.6511	816M40	110	-	9840	40NCD3	38NiCrMo4(KB)	35NiCrMo4	-
	34CrNiMo6	1.3505	817M40	24	2541	4340	35NCD6	35NiCrMo6(KB)	-	-
	34Cr4	1.7033	530A32	18B	-	5132	32C4	34Cr4(KB)	35Cr4	SCR430(H)
	41Cr4	1.7035	530A40	18	-	5140	42C4	41Cr4	42Cr4	SCR440(H)
	32CrMo12	1.7361	722M24	40B	2240	-	30CD12	32CrMo12	F.124.A	-
	51CrV4	1.8159	735A50	47	2230	6150	50CV4	50CrV4	51CrV4	SUP10
	41CrAlMo7	1.8509	905M39	41B	2940	-	40CAD6, 12	41CrAlMo7	41CrAlMo7	-
	100Cr6	1.5752	534A99	31	2258	52100	100C6	100Cr6	F.131	SUJ2
	105WCr6	1.2419	-	-	2140	-	105WC13	10WCr6	105WCr5	SKS31
	-	-	-	-	-	-	-	107WCr5KU	-	SKS2, SKS3
	-	1.2714	-	-	-	L6	55NCDV7	-	F.520.S	SKT4
	100Cr6	1.2067	BL3	-	-	L3	Y100C6	-	100Cr6	-
	16MnCr5	1.7139	-	-	2127	-	-	-	-	-
	16Mo5	1.5423	1503-245-420	-	-	4520	-	16Mo5	16Mo5	-
	40NiCrMo8-4	1.6562	311-Type 7	-	-	8740	-	40NiCrMo2(KB)	40NiCrMo2	SNCM240
	42Cr4	1.7045	-	-	2245	5140	-	-	42Cr4	SCR440
	31NiCrMo14	1.5755	830 M 31	-	2534	-	-	-	F-1270	-
	36NiCr6	1.571	640A35	111A	-	3135	35NC6	-	-	SNC236
	22Mo4	1.5419	605A32	-	2108	8620	-	-	F520.S	-
	25CrMo4	1.7218	1717CDS110	-	2225	4130	25CD4	25CrMo4(KB)	AM26CrMo4	SCM420;SCM430
	-	-	-	-	2223	-	-	-	-	-
	高合金鋼									
	X210Cr12	1.208	BD3	-	-	D3	Z200C12	X210Cr13KU	X210Cr12	SKD1
								X250Cr12KU		
	X43Cr13	1.2083	-	-	2314	-	-	-	-	-
	X40CrMoV5 1	1.2344	BH13	-	2242	H13	Z40CDV5	X35CrMoV05KU	X40CrMoV5	SKD61

Country/Region	Europe	Germany	UK		Sweden	The United States	France	Italy	Spain	Japan
Standard	DIN EN	W.-nr	BS	EN	SS	AISI	AFNOR	UNI	UNE	JIS
Low-alloyed steel										
								X40CrMoV511KU		
	X100CrMoV5 1	1.2363	BA2	-	2260	A2	Z100CDV5	X100CrMoV51KU	X100CrMoV5	SKD12
	X210CrW12	1.2436	-	-	2312	-	-	X215CrW12 1KU	X210CrW12	SKD2
	X30WCrV9 3	1.2581	BH21	-	-	H21	Z30WCv9	X28W09KU	X30WCrV9	SKD5
								X30WCrV9 3KU		
	X165CrMoV 12	1.2601	-	-	2310	-	-	X165CrMoV12KU	X160CrMoV12	-
	X155CrMoV12-1	1.2379	-	-	2736	HNV3	-	-	-	-
	X8Ni9	1.5662	1501-509;510	-	-	ASTM A353	-	X10Ni9	XBNI09	-
	12Ni19	1.568	-	-	-	2515	Z18N5	-	-	-
	S6-5-2	1.3343	4959BA2	-	2715	D3	Z40CSD10	15NiCrMo13	-	SUH3
	-	-	BM 2	-	2722	M 2	Z85WDCV	HS 6-5-2-2	F-5603.	SKH 51
	HS 6-5-2-5	1.3243	BM 35	-	2723	M 35	6-5-2-5	HS 6-5-2-5	F-5613	SKH 55
	HS 2-9-2	1.3348	-	-	2782	M 7	-	HS 2-9-2	F-5607	-
	G-X120Mn12	1.3401	Z120M12	-	2183	L3	Z120M12	XG120Mn12	X120Mn12	SCMnH/1
Ferrite/martensite stainless steel										
	X10CrAl13	1.4724	403S17	-	-	405	Z10C13	X10CrAl12	F.311	SUS405
	X10CrAl18	1.4742	430S15	60	-	430	Z10CAS18	X8Cr17	F.3113	SUS430
	X10CrAl2-4	1.4762	-	-	2322	446	Z10CAS24	X16Cr26	-	SUH446
	X1CrMoTi18-2	1.4521	-	-	2326	S44400	-	-	-	-
	X6Cr13	1.4	403S17	-	2301	403	Z6C13	X6Cr13	F.3110	SUS403
	X7Cr14	1.4001	-	-	-	-	-	-	F.8401	-
	X10Cr13	1.4006	410S21	56A	2302	410	Z10C14	X12Cr13	F.3401	SUS410
	X6Cr17	1.4016	430S15	960	2320	430	Z8C17	X8Cr17	F3113	SUS430
	X6CrAl13	1.4002	405S17	-	-	405	Z8CA12	X6CrAl13	-	-
	X20Cr13	1.4021	420S37	-	2303	420	Z20C13	X20Cr13	-	-
	X6CrMo17-1	1.4113	434S17	-	2325	434	Z8CD17.01	X8CrMo17	-	SUS434
	X45CrS9-3-1	1.4718	401S45	52	-	HW3	Z45CS9	X45GrSi8	F322	SUH1
	X85CrMoV18-2	1.4748	443S65	59	-	HNV6	Z80CSN20.02	X80CrSiNi20	F.320B	SUH4
	X20CrMoV12-1	1.4922	-	-	2317	-	-	X20CrMoNi 12 01	-	-
	X12CrS13	1.4005	416 S 21	-	2380	416	Z11CF1	X12 CrS 13	F-3411	SUS 416
	X46Cr13	1.4034	420S45	56D	2304	-	Z40CM	X40Cr14	F.3405	SUS420J2
	X19CrNi17-2	1.4057	431S29	57	2321	431	Z15CN6.02	X16CrNi16	F.3427	SUS431
	X5CrNiCuNb16-4 X4	1.4542 1.4548	-	-	-	630	Z7CNU17-04	-	-	-
	CrNiMo16-5	1.4418	-	-	2387	-	Z6CND16-04-01	-	-	-
	X14CrMoS17	1.4104	-	-	2383	430F	Z10CF17	X10CrS17	F.3117	SUS430F

Comparison table of cutting materials

Country/Region	Europe	Germany	UK		Sweden	The United States	France	Italy	Spain	Japan
Standard	DIN EN	W.-nr	BS	EN	SS	AISI	AFNOR	UNI	UNE	JIS
Austenite stainless steel										
	X3CrNiMo13-4	1.4313	425C11	-	2385	CA6-NM	Z4CND13.4M	(G)X6CrNi304	-	SCS5
							Z38C13M			
	X53CrMnNiN21-9	1.4871	349S54	-	-	EV8	Z52CMN21.09	X53CrMnNiN21 9	-	SUH35, SUH36
	X2CrNi18-10	1.4311	304S62	-	2371	304LN	Z2CN18.10	-	-	SUS304LN
	X2CrNiMo17-13-3	1.4429	-	-	2375	316LN	Z2CND17.13	-	-	SUS316LN
	X2CrNiMo17-12-2	1.4435	316S13	-	2348	316L	Z2CND17-12	X2CrNiMo1712	-	-
	X2CrNiMo18-14-3	1.4404	316S13	-	2353	316L	Z2CND17.12	X2CrNiMo17 12	-	SCS16, SUS316L
	X3CrNiMo17-3-3	1.4436	316S33	-	2343 2347	316	Z6CND18-12-03	X8CrNiMo1713	-	-
	X2CrNiMo18-15-4	1.4438	317S12	-	2367	317L	Z2CND19.15	X2CrNiMo18 16	-	SUS317L
	X6CrNiNb18-10	1.455	347S17	58F	2338	347	Z6CNNb18.10	X6CrNiNb18 11	F.3552 F.3524	SUS347
	X6CrNiMoTi17-12-2	1.4571	320S17	58J	2350	316Ti	Z6NDT17.12	X6CrNiMoTi17 12	F.3535	-
	X10CrNiMoNb 18-12	1.4583	-	-	-	318	Z6CNDNb17 13B	X6CrNiMoNb17 13	-	-
	X15CrNiSi20-12	1.4828	309S24	-	-	309	Z15CNS20.12	-	-	SUS303
	X2CrNiMoN17-11-2	1.4406	301S21	58C	2370	308	Z1NCDU25.20	-	F.8414	SCS17
	X1CrNiMoCuN20-18-7	1.4547	-	-	2378	S31254	Z1CNDU20-18-06AZ	-	-	-
	X9CrNi18-8	1.431	-	-	2331	301	Z12CN17.07	X12CrNi17 07	F.3517	SUS301
M	X7CrNiAl17-7	1.4568 1.4504	316S111	-	-	17-7PH	Z8CNA17-07	X2CrNiMo1712	-	-
	X2CrNi19-11	1.4306	304S11	-	2352	304L	Z2CN18-10	X2CrNi18 11	-	-
			304S12							
			304S31	58E	2332 2333	304	Z6CN18.09	X5CrNi18 10	F.3504 F.3541	SUS304
	X5CrNi18-10	1.4301	304S15	58E	2332	304	Z6CN18.09	X5CrNi18 10	F.3551	SUS304
	X5CrNiMo17-2-2	1.4401	316S16	58J	2347	316	Z6CND17.11	X5CrNiMo17 12	F.3543	SUS316
	X6CrNiTi18-10	1.4541	321S12	58B	2337	321	Z6CNT18.10	X10CrNiS 18.09	F.3553 F.3523	SUS321
	X8CrNiS18-9	1.4305	303S21	58M	2346	303	Z10CNF 18.09	X6CrNiTi18 11	F.3508	SUS303
High quality austenite (Ni>20%) stainless steel										
	G-X40NiCrSi36-18	1.4865	330C11	-	-	-	-	XG50NiCr39 19	-	SCH15
	X1NiCrMoCu25-20-5	1.4539	-	-	2562	UNS V 0890A	Z2 NCDU25-20	-	-	-
	X8CrNi25-21	1.4845	310S24	-	2361	310S	Z12CN25 20	X6CrNi25 20	F.331	SUH310
	X12NiCrSi36 16	1.4864	-	-	-	330	Z12NCS35.16	F-3313	-	SUH330
	X1NiCrMoCu31-27-4	1.4563	-	-	2584	NO8028	Z1NCDU31-27-03	-	-	-
Duplex (austenite/ferrite) stainless steel										
	X2CrNiN23-4	1.4362	-	-	2376	S31500	-	-	-	-
	X8CrNiMo27-5	-	-	-	2324	S32900	-	-	-	-
	X2CrNiN23-4	-	-	-	2327	S32304	Z2CN23-04AZ	-	-	-
					2328					
	X2CrNiMoN22-53	-	-	-	2377	S31803	Z2CND22-05-03	-	-	-

Comparison table of hardness

• Conversion value approximate to brinell hardness of steel

Brinell hardness 3000kgf HB	Rockwell hardness				Vickers hardness 50kgf HV	Shore hardness HS	Tensile strength (Gpa)
	A	B	C	D			
	Scale	Scale	Scale	Scale			
	60kgf brale	100kgf 1/10in	150kgf brale	100kgf brale			
	HRA	HRB	HRC	HRD			
—	85.6	—	68.0	76.9	940	97	—
—	85.3	—	67.5	76.5	920	96	—
—	85.0	—	67.0	76.1	900	95	—
767	84.7	—	66.4	75.7	880	93	—
757	84.4	—	65.9	75.3	860	92	—
745	84.1	—	65.3	74.8	840	91	—
733	83.8	—	64.7	74.3	820	90	—
722	83.4	—	64.0	73.8	800	88	—
712	—	—	—	—	—	—	—
710	83.0	—	63.3	73.3	780	87	—
698	82.6	—	62.5	72.6	760	86	—
684	82.2	—	61.8	72.1	740	—	—
682	82.2	—	61.7	72.0	737	84	—
670	81.8	—	61.0	71.5	720	83	—
656	81.3	—	60.1	70.8	700	—	—
653	81.2	—	60.0	70.7	697	81	—
647	81.1	—	59.7	70.5	690	—	—
638	80.8	—	59.2	70.1	680	80	—
630	80.6	—	58.8	69.8	670	—	—
627	80.5	—	58.7	69.7	667	79	—
601	79.8	—	57.3	68.7	640	77	—
578	79.1	—	56.0	67.7	615	75	—
555	78.4	—	54.7	66.7	591	73	2.06
534	77.8	—	53.5	65.8	569	71	1.98
514	76.9	—	52.1	64.7	547	70	1.89
495	76.3	—	51.0	63.8	528	68	1.82
477	75.6	—	49.6	62.7	508	66	1.73
461	74.9	—	48.5	61.7	491	65	1.67
444	74.2	—	47.1	60.8	472	63	1.59
429	73.4	—	45.7	59.7	455	61	1.51
415	72.8	—	44.5	58.8	440	59	1.46
401	72.0	—	43.1	57.8	425	58	1.39
388	71.4	—	41.8	56.8	410	56	1.33
375	70.6	—	40.4	55.7	396	54	1.26
363	70.0	—	39.1	54.6	383	52	1.22
352	69.3	(110.0)	37.9	53.8	372	51	1.18
341	68.7	(109.0)	36.6	52.8	360	50	1.13
331	68.1	(108.5)	35.5	51.9	350	48	1.10

Comparison table of hardness

- Conversion value approximate to brinell hardness of steel

Brinell hardness 3000kgf HB	Rockwell hardness				Vickers hardness 50kgf HV	Shore hardness HS	Tensile strength (Gpa)
	A	B	C	D			
	Scale	Scale	Scale	Scale			
	60kgf	100kgf	150kgf	100kgf			
	brale	1/10in	brale	brale			
Brale	Ball	Brale	Brale				
HRA	HRB	HRC	HRD				
321	67.5	(108.0)	34.3	50.1	339	47	1.06
311	66.9	(107.5)	33.1	50.0	328	46	1.03
302	66.3	(107.0)	32.1	49.3	319	45	1.01
293	65.7	(106.0)	30.8	48.3	309	43	0.97
285	65.3	(105.5)	29.9	47.6	301	—	0.95
277	64.6	(104.5)	28.8	46.7	292	41	0.92
269	64.1	(104.0)	27.6	45.9	284	40	0.89
262	63.6	(103.0)	26.6	45.0	276	39	0.87
255	63.0	(102.0)	25.4	44.2	269	38	0.84
248	62.5	(101.0)	24.2	43.2	261	37	0.82
241	61.8	(100.0)	22.8	42.0	253	36	0.80
235	61.4	99.0	21.7	41.4	247	35	0.78
229	60.8	98.2	20.5	40.5	241	34	0.76
223	—	97.3	(18.8)	—	234	—	—
217	—	96.4	(17.5)	—	228	33	0.73
212	—	95.5	(16.0)	—	222	—	0.71
207	—	94.6	(15.2)	—	218	32	0.69
201	—	93.8	(13.8)	—	212	31	0.68
197	—	92.8	(12.7)	—	207	30	0.66
192	—	91.9	(11.5)	—	202	29	0.64
187	—	90.7	(10.0)	—	196	—	0.62
183	—	90.0	(9.0)	—	192	28	0.62
179	—	89.0	(8.0)	—	188	27	0.60
174	—	87.8	(6.4)	—	182	—	0.59
170	—	86.8	(5.4)	—	178	26	0.57
167	—	86.0	(4.4)	—	175	—	0.56
163	—	85.0	(3.3)	—	171	25	0.55
156	—	82.9	(0.9)	—	163	—	0.52
149	—	80.8	—	—	156	23	0.50
143	—	78.7	—	—	150	22	0.49
137	—	76.4	—	—	143	21	0.46
131	—	74.0	—	—	137	—	0.45
126	—	72.0	—	—	132	20	0.43
121	—	69.8	—	—	127	19	0.41
116	—	67.6	—	—	122	18	0.40
111	—	65.7	—	—	117	15	0.38

1) Generally value in () is not used in the table.
 2) Brales of Rockwell hardness A, C and D are made of diamond.
 3) This table is excerpted from the JIS Steel Standard (1980).

Fit dimension tolerance

Basic dimension mm	Standard tolerance class																			
			IT1	IT2	IT3	IT4	IT5	IT6	IT7	IT8	IT9	IT10	IT11	IT12	IT13	IT14	IT15	IT16	IT17	IT18
	>	To	μm										mm							
---	3	0.8	1.2	2	3	4	6	10	14	25	40	60	0.1	0.14	0.25	0.4	0.6	1	1.4	
3	6	1	1.5	2.5	4	5	8	12	18	30	48	75	0.12	0.18	0.3	0.48	0.75	1.2	1.8	
6	10	1	1.5	2.5	4	6	9	15	22	36	58	90	0.15	0.22	0.36	0.58	0.9	1.5	2.2	
10	18	1.2	2	3	5	8	11	18	27	43	70	110	0.18	0.27	0.43	0.7	1.1	1.8	2.7	
18	30	1.5	2.5	4	6	9	13	21	33	52	84	130	0.21	0.33	0.52	0.84	1.3	2.1	3.3	
30	50	1.5	2.5	4	7	11	16	25	39	62	100	160	0.25	0.39	0.62	1	1.6	2.5	3.9	
50	80	2	3	5	8	13	19	30	46	74	120	190	0.3	0.46	0.74	1.2	1.9	3	4.6	
80	120	2.5	4	6	10	15	22	35	54	87	140	220	0.35	0.54	0.87	1.4	2.2	3.5	5.4	
120	180	3.5	5	8	12	18	25	40	63	100	160	250	0.4	0.63	1	1.6	2.5	4	6.3	
180	250	4.5	7	10	14	20	29	46	72	115	185	290	0.46	0.72	1.15	1.85	2.9	4.6	7.2	
250	315	6	8	12	16	23	32	52	81	130	210	320	0.52	0.81	1.3	2.1	3.2	5.2	8.1	
315	400	7	9	13	18	25	36	57	89	140	230	360	0.57	0.89	1.4	2.3	3.6	5.7	8.9	
400	500	8	10	15	20	27	40	63	97	155	250	400	0.63	0.97	1.55	2.5	4	6.3	9.7	
500	630	9	11	16	22	32	44	70	110	175	280	440	0.7	1.1	1.75	2.8	4.4	7	11	
630	800	10	13	18	25	36	50	80	125	200	320	500	0.8	1.25	2	3.2	5	8	12.5	
800	1000	11	15	21	28	40	56	90	140	230	360	560	0.9	1.4	2.3	3.6	5.6	9	14	
1000	1250	13	18	24	33	47	66	105	165	260	420	660	1.05	1.65	2.6	4.2	6.6	10.5	16.5	
1250	1600	15	21	29	39	55	78	125	195	310	500	780	1.25	1.95	3.1	5	7.8	12.5	19.5	
1600	2000	18	25	35	46	65	92	150	230	370	600	920	1.5	2.3	3.7	6	9.2	15	23	
2000	2500	22	30	41	55	78	110	175	280	440	700	1100	1.75	2.8	4.4	7	11	17.5	28	
2500	3150	26	36	50	68	96	135	210	330	540	860	1350	2.1	3.3	5.4	8.6	13.5	21	33	

Notice
 1. Standard tolerance values from IT1 to IT5 with basic sizes greater than 500mm are on trial.
 2. IT4 to IT18 is not applicable if the basic size is less than or equal to 1mm.

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling


Solid carbide end mill

C


Short hole drill

Solid carbide drill

The lower deviation (ei) and upper deviation (es) of the shaft can be obtained from the basic deviation and standard tolerance (IT) of the shaft.

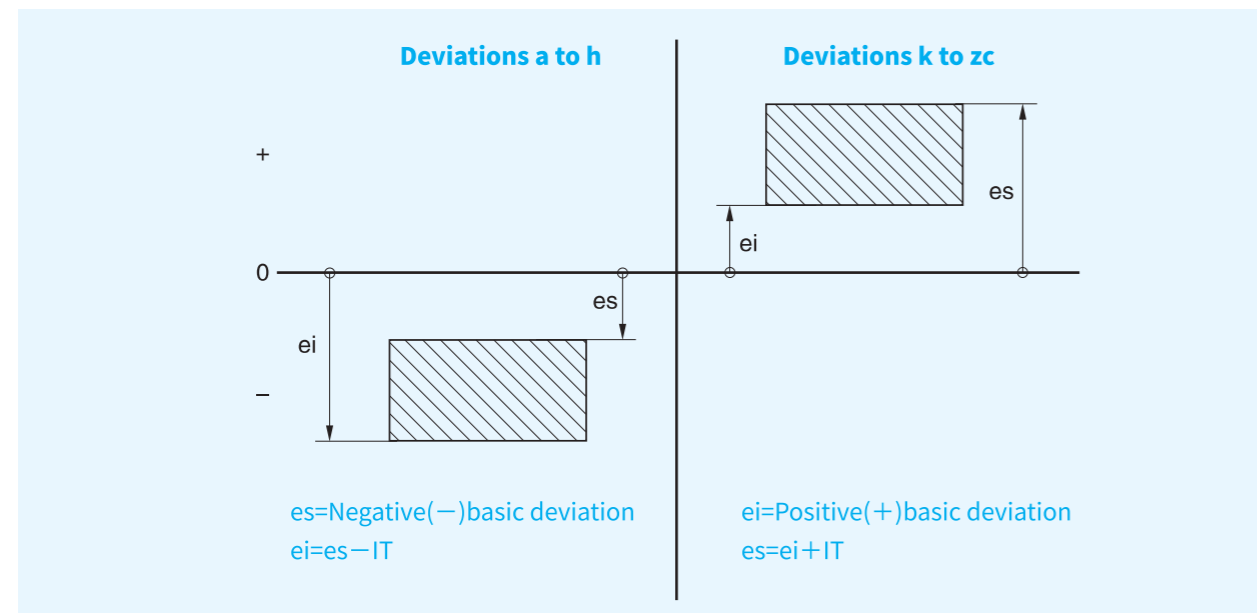

The lower deviation (EI) and upper deviation (ES) of the hole can be obtained from the basic deviation and standard tolerance (IT) of the hole.

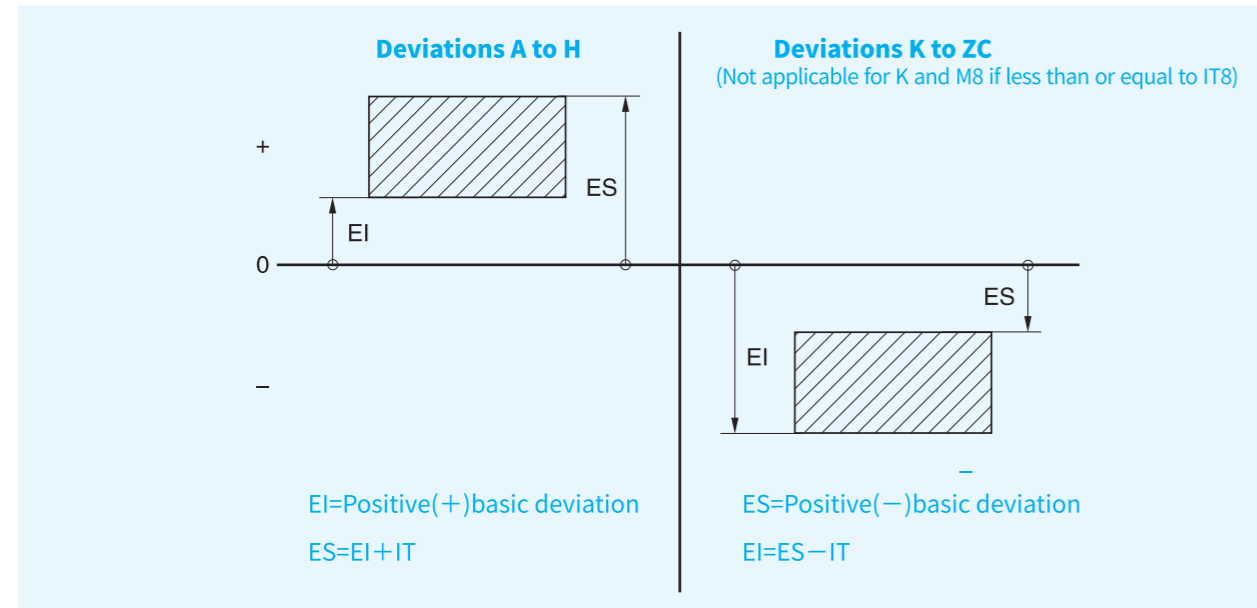

For example:

for a hole with diameter of $\phi 3$ and tolerance class of H7, it can be found from the Value Table of Hole Basic Deviation that the lower deviation (EI) of tolerance class H within this size range is 0, while the corresponding standard tolerance (IT) of class 7 is $10\mu\text{m}$, so the upper deviation $ES = EI + IT = 10\mu\text{m}$.

Therefore, the fit dimension of this hole is $\phi 3 \begin{smallmatrix} +0.01 \\ 0 \end{smallmatrix} \text{ mm}$.

Basic deviation value of the shaft

Basic dimension mm	Basic deviation value												
	Upper deviation es												
	All standard tolerance classes												
>	to	a	b	c	cd	d	e	ef	f	fg	g	h	js
---	3	-270	-140	-60	-34	-20	-14	-10	-6	-4	-2	0	
3	6	-270	-140	-70	-46	-30	-20	-14	-10	-6	-4	0	
6	10	-280	-150	-80	-56	-40	-25	-18	-13	-8	-5	0	
10	14	-290	-150	-95		-50	-32		-16		-6	0	
14	18												
18	24	-300	-160	-110		-65	-40		-20		-7	0	
24	30												
30	40	-310	-170	-120		-80	-50		-25		-9	0	
40	50												
50	65	-340	-190	-140		-100	-60		-30		-10	0	
65	80												
80	100	-380	-220	-170		-120	-72		-36		-12	0	
100	120												
120	140	-460	-260	-200		-145	-85		-43		-14	0	
140	160												
160	180	-580	-310	-230		-170	-100		-50		-15	0	
180	200												
200	225	-740	-380	-260		-190	-110		-56		-17	0	
225	250												
250	280	-920	-480	-300		-210	-125		-62		-18	0	
280	315												
315	355	-1200	-600	-360		-230	-135		-68		-20	0	
355	400												
400	450	-1500	-760	-440		-260	-145		-76		-22	0	
450	500												
500	560					-290	-160		-80		-24	0	
560	630												
630	710					-320	-170		-86		-26	0	
710	800												
800	900					-350	-195		-98		-28	0	
900	1000												
1000	1120					-390	-220		-110		-30	0	
1120	1250												
1250	1400					-430	-240		-120		-32	0	
1400	1600												
1600	1800					-480	-260		-130		-34	0	
1800	2000												
2000	2240					-520	-290		-145		-38	0	
2240	2500												
2500	2800												
2800	3150												

Deviation = $\pm(IT_n/2)$, in which IT_n is the IT value

Notes:
 1. The basic deviations a and b are not applicable if the basic size is less than or equal to 1mm.
 2. Deviation = $\pm[(IT_n - 1)/2]$ if the IT_n value is odd from js7 to js11 in the tolerance zone.

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

General technical information

● Basic deviation value of the shaft

µm

Basic deviation value																		
Lower deviation ei																		
IT5 & IT6	IT7	IT8	IT4 & IT7	≤IT3 >IT7	All standard tolerance classes													
j		k		m	n	p	r	s	t	u	v	x	y	z	zn	zb	zc	
-2	-4	-6	0	0	+2	+4	+6	+10	+14		+18		+20		+26	+32	+40	+60
-2	-4		+1	0	+4	+8	+12	+15	+19		+23		+28		+35	+42	+50	+80
-2	-5		+1	0	+6	+10	+15	+19	+23		+28		+34		+42	+52	+67	+97
-3	-6		+1	0	+7	+12	+18	+23	+28		+33		+40		+50	+64	+90	+130
											+39	+45		+60	+77	+108	+150	
-4	-8		+2	0	+8	+15	+22	+28	+35		+41	+47	+54	+63	+73	+98	+136	+188
											+41	+48	+55	+64	+75	+88	+118	+160
-5	-10		+2	0	+9	+17	+26	+34	+43		+48	+60	+68	+80	+94	+112	+148	+200
											+54	+70	+81	+97	+114	+136	+180	+242
-7	-12		+2	0	+11	+20	+32	+41	+53	+66	+87	+102	+122	+144	+172	+226	+300	+405
								+43	+59	+75	+102	+120	+146	+174	+210	+274	+360	+480
-9	-15		+3	0	+13	+23	+37	+51	+71	+91	+124	+146	+178	+214	+258	+335	+445	+585
								+54	+79	+104	+144	+172	+210	+254	+310	+400	+525	+690
								+63	+92	+122	+170	+202	+248	+300	+365	+470	+620	+800
-11	-18		+3	0	+15	+27	+43	+65	+100	+134	+190	+228	+280	+340	+415	+535	+700	+900
								+68	+108	+146	+210	+252	+310	+380	+465	+600	+780	+1000
								+77	+122	+166	+236	+284	+350	+425	+520	+670	+880	+1150
-13	-21		+4	0	+17	+31	+50	+80	+130	+180	+258	+310	+385	+470	+575	+740	+960	+1250
								+84	+140	+196	+284	+340	+425	+520	+640	+820	+1050	+1350
-16	-26		+4	0	+20	+34	+56	+94	+158	+218	+315	+385	+475	+580	+710	+920	+1200	+1550
								+98	+170	+240	+350	+425	+525	+650	+790	+1000	+1300	+1700
-18	-28		+4	0	+21	+37	+62	+108	+190	+268	+390	+475	+590	+730	+900	+1150	+1500	+1900
								+114	+208	+294	+435	+530	+660	+820	+1000	+1300	+1650	+2100
-20	-32		+5	0	+23	+40	+68	+126	+232	+330	+490	+595	+740	+920	+1100	+1450	+1850	+2400
								+132	+252	+360	+540	+660	+820	+1000	+1250	+1600	+2100	+2600
			0	0	+26	+44	+78	+150	+280	+400	+600							
								+155	+310	+450	+660							
			0	0	+30	+50	+88	+175	+340	+500	+740							
								+185	+380	+560	+840							
			0	0	+34	+56	+100	+210	+430	+620	+940							
								+220	+470	+680	+1050							
			0	0	+40	+66	+120	+250	+520	+780	+1150							
								+260	+580	+840	+1300							
			0	0	+48	+78	+140	+300	+640	+960	+1450							
								+330	+720	+1050	+1600							
			0	0	+58	+92	+170	+370	+820	+1200	+1850							
								+400	+920	+1350	+2000							
			0	0	+68	+110	+195	+440	+1000	+1500	+2300							
								+460	+1100	+1650	+2500							
			0	0	+76	+135	+240	+550	+1250	+1900	+2900							
								+580	+1400	+2100	+3200							

● Basic deviation value of the hole

Basic dimension mm	Basic deviation value																					
	Lower deviation EI													Upper deviation ES								
	All standard tolerance classes													IT6	IT7	IT8	≤IT8 >IT8	≤IT8 >IT8	≤IT8 >IT8	≤IT8 >IT8	≤IT7	
>	to	A	B	C	CD	D	E	EF	F	FG	G	H	JS	J	K	M	N	P To ZC				
---	3	+270	+140	+60	+34	+20	+14	+10	+6	+4	+2	0		+2	+4	+6	0	0	-2	-2	-4	-4
3	6	+270	+140	+70	+46	+30	+20	+14	+10	+6	+4	0		+5	+6	+10	-1+Δ		-4+Δ	-4	-8+Δ	0
6	10	+280	+150	+80	+56	+40	+25	+18	+13	+8	+5	0		+5	+8	+12	-1+Δ		-6+Δ	-6	-10+Δ	0
10	14													+6	+10	+15	-1+Δ		-7+Δ	-7	-12+Δ	0
14	18	+290	+150	+95		+50	+32		+16		+6	0		+6	+10	+15	-1+Δ		-7+Δ	-7	-12+Δ	0
18	24													+7	+12	+20	-2+Δ		-8+Δ	-8	-15+Δ	0
24	30	+300	+160	+110		+65	+40		+20		+7	0		+8	+12	+20	-2+Δ		-8+Δ	-8	-15+Δ	0
30	40	+310	+170	+120		+80	+50		+25		+9	0		+10	+14	+24	-2+Δ		-9+Δ	-9	-17+Δ	0
40	50	+320	+180	+130		+80	+50		+25		+9	0		+10	+14	+24	-2+Δ		-9+Δ	-9	-17+Δ	0
50	65	+340	+190	+140		+100	+60		+30		+10	0		+13	+18	+28	-2+Δ		-11+Δ	-11	-20+Δ	0
65	80	+360	+200	+150		+100	+60		+30		+10	0		+16	+22	+34	-3+Δ		-13+Δ	-13	-23+Δ	0
80	100	+380	+220	+170		+120	+72		+36		+12	0		+16	+22	+34	-3+Δ		-13+Δ	-13	-23+Δ	0
100	120	+410	+240	+180		+120	+72		+36		+12	0		+18	+26	+41	-3+Δ		-15+Δ	-15	-27+Δ	0
120	140	+460	+260	+200		+145	+85		+43		+14	0		+18	+26	+41	-3+Δ		-15+Δ	-15	-27+Δ	0
140	160	+520	+280	+210		+145	+85		+43		+14	0		+22	+30	+47	-4+Δ		-17+Δ	-17	-31+Δ	0
160	180	+580	+310	+230		+170	+100		+50		+15	0		+25	+36	+55	-4+Δ		-20+Δ	-20	-34+Δ	0
180	200	+660	+340	+240		+170	+100		+50		+15	0		+29	+39	+60	-4+Δ		-21+Δ	-21	-37+Δ	0
200	225	+740	+380	+260		+210	+125		+62		+18	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
225	260	+820	+420	+280		+230	+135		+68		+20	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
260	280	+920	+480	+300		+260	+145		+76		+22	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
280	315	+1050	+540	+330		+290	+160		+80		+24	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
315	355	+1200	+600	+360		+320	+170		+86		+26	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
355	400	+1350	+680	+400		+350	+195		+98		+28	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
400	450	+1500	+760	+440		+390	+220		+110		+30	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
450	500	+1650	+840	+480		+430	+240		+120		+32	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
500	560					+260	+145		+76		+22	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
560	630					+290	+160		+80		+24	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
630	710					+320	+170		+86		+26	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
710	800					+350	+195		+98		+28	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
800	900					+390	+220		+110		+30	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
900	1000					+430	+240		+120		+32	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
1000	1120					+480	+260		+130		+34	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
1120	1250					+520	+290		+145		+38	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
1250	1400					+580	+320		+160		+44	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
1400	1600					+660	+360		+180		+50	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
1600	1800					+760	+420		+210		+58	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
1800	2000					+880	+480		+240		+66	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
2000	2240					+1000	+560		+280		+76	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
2240	2500					+1150	+640		+320		+88	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
2500	2800					+1350	+760		+380		+100	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0
2800	3150					+1600	+920		+460		+120	0		+33	+43	+66	-5+Δ		-23+Δ	-23	-40+Δ	0

Notes:
 1. The basic deviation A and B as well as N which is greater than IT8 are not applicable if the basic size is less than or equal to 1mm.
 2. Deviation = ±[(ITn-1)/2] if the ITn value is odd from JS7 to JS11 in the tolerance zone.
 3. The desired Δ value can be selected from the right side of the table for K, M, N which is less than or equal to IT8, and P to ZC which is less than or equal to IT7.
 For example: K7 in segment 18-30mm: Δ=8 µm, so ES=-2+8=+6 µm
 S6 in segment 18-30mm: Δ=4 µm, so ES=-35+4=-31 µm
 4) An exceptional circumstance: M5 in segment 250 - 315mm, ES=-9 µm (instead of -11 µm).

A

General technical information

● Basic deviation value of the hole

μm

Basic deviation value													Δ value					
Upper deviation ES																		
Standard tolerance class > IT7													All standard tolerance classes					
P	R	S	T	U	V	X	Y	Z	ZA	ZB	ZC	IT3	IT4	IT5	IT6	IT7	IT8	
-6	-10	-14		-18		-20		-26	-32	-40	-60	0	0	0	0	0	0	
-12	-15	-19		-23		-28		-35	-42	-50	-80	1	1.5	1	3	4	6	
-15	-19	-23		-28		-34		-42	-52	-67	-97	1	1.5	2	3	6	7	
-18	-23	-28		-33		-40		-50	-64	-90	-130	1	2	3	3	7	9	
				-39	-45	-60	-77	-108	-150									
-22	-28	-35		-41	-47	-54	-63	-73	-98	-136	-188	1.5	2	3	4	8	12	
			-41	-48	-55	-64	-75	-88	-118	-160	-218							
-26	-34	-43		-48	-60	-68	-80	-94	-112	-148	-200	1.5	3	4	5	9	14	
			-48	-60	-68	-80	-94	-112	-148	-200	-274							
			-54	-70	-81	-97	-114	-136	-180	-242	-325							
-32	-41	-53	-66	-87	-102	-122	-144	-172	-226	-300	-405	2	3	5	6	11	16	
	-43	-59	-75	-102	-120	-146	-174	-210	-274	-360	-480							
-37	-51	-71	-91	-124	-146	-178	-214	-258	-335	-445	-585	2	4	5	7	13	19	
	-54	-79	-104	-144	-172	-210	-254	-310	-400	-525	-690							
	-63	-92	-122	-170	-202	-248	-300	-365	-470	-620	-800							
-43	-65	-100	-134	-190	-228	-280	-340	-415	-535	-700	-900	3	4	6	7	15	23	
	-68	-108	-146	-210	-252	-310	-380	-465	-600	-780	-1000							
	-77	-122	-166	-236	-284	-350	-425	-520	-670	-880	-1150							
-50	-80	-130	-180	-258	-310	-385	-470	-575	-740	-960	-1250	3	4	6	9	17	26	
	-84	-140	-196	-284	-340	-425	-520	-640	-820	-1050	-1350							
	-94	-158	-218	-315	-385	-475	-580	-710	-920	-1200	-1550							
-56	-98	-170	-240	-350	-425	-525	-650	-790	-1000	-1300	-1700	4	4	7	9	20	29	
	-108	-190	-268	-390	-475	-590	-730	-900	-1150	-1500	-1900							
-62	-114	-208	-294	-435	-530	-660	-820	-1000	-1300	-1650	-2100	4	5	7	11	21	32	
	-126	-232	-330	-490	-595	-740	-920	-1100	-1450	-1850	-2400							
-68	-132	-252	-360	-540	-660	-820	-1000	-1250	-1600	-2100	-2600	5	5	7	13	23	34	
	-150	-280	-400	-600														
-78	-155	-310	-450	-660														
	-175	-340	-500	-740														
-88	-185	-380	-560	-840														
100	-210	-430	-620	-940														
	-220	-470	-680	-1050														
-120	-250	-520	-780	-1150														
	-260	-580	-840	-1300														
-140	-300	-640	-960	-1450														
	-330	-720	-1050	-1600														
	-370	-820	-1200	-1850														
-170	-400	-920	-1350	-2000														
	-440	-1000	-1500	-2300														
-195	-460	-1100	-1650	-2500														
	-550	-1250	-1900	-2900														
-240	-580	-1400	-2100	-3200														

Comparison table of PVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT
	IOS classification	Groups of materials										
P	P10	HR5225 HR1135	GC1025 GC1125	KCS10 KCU10 KC5010	IC807	VP10MF MS6015	AH710	PR930 PR1005 PR1025 PR1115 PR1215 PR1425 PR1225	AC1030U ACZ150 AC5025S AC520U			YBG102
	P30	HR5125 HR5225 HR7125 HR7225	GC1025 GC1125	KCU25 KC5025	IC328 IC330 IC830 IC928	VP10RT VP20RT VP15TF VP20MF	AH725 AH7025 AH730 SH725 SH730 GH730 GH330 J740	PR1025 PR1225 PR1535	AC1030U AC530U	TT8020 TT8080 TT9030	YBG202	
												P40
	M10	HR9105 HR7115	GC1115 GC1125	KCS10 KCU10 KC5010	IC807 IC808 IC907 IC908	VP10MF MS6015	AH8005 AH630	PR1025 PR1215 PR1225	AC515S AC5025S AC510U AC520U ACZ150	TT5080	YBG202 YBG205	
												M20
	M30	HR5125 HR5225 HR7125 HR7225	GC1125 GC2035	KCU25 KC5025	IC328 IC330 IC830 IC840 IC882	VP10RT VP20RT VP15TF VP20MF MP7035	AH645 AH120 AH725 SH725 SH730 J740	PR1125 PR1535	AC5025S AC6040M AC1030U AC520U AC530U	TT8020 TT8080 TT9020 TT9080		
												M40

Comparison table of PVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT	
	IOS classification	Groups of materials											
PVD milling	K	K10		GC3330 GC3220 K20W K20D K20M K15W	KCS10 KCU10 KC5010	IC810		GH110 AH110	PR905 PR1215	AC1030U AC510U ACZ150			
			K20		GC3330 GC3220 GC3040 K20W K20D GC4230 K20M K15W	KCS10 KCU10 KCU25 KC5010 KC5025		VP10RT VP20RT VP15TF	AH120 AH725 AH730 SH725 SH730 J740	PR905 PR1215	AC1030U AC5025S AC520U AC530U		
				K30		GC3330 GC3040 K20W GC4240 GC4230		IC830 IC908 IC910 IC928	VP10RT VP20RT VP15TF	AH725 AH7025 AH730 SH725 SH730 GH730 GH330 J740		AC1030U AC530U	
		S01						IC804 IC806	MP9005 VP05RT	AH8005 AH905			PR005S
		S	S10	HR9105 HR7115	GC1105 GC1005 GC1025	KC5010 KC5510 KCU10 KCS10	IC807 IC808 IC907 IC908	MP9005 MP9015 VP10RT	AH8015 AH905 SH730 AH110	PR005S PR015S	AC510U AC5015S	TT9080 TT9030	YBG102 YBG105 YBG202 YBG103
				S20	HR7115	GC1025 GC1125	KC5025 KC5525 KCU25	IC806 IC808 IC908	MP9015 MT9015 VP20RT MP9025	AH8015 AH120 AH725	PR015S PR1535	AC510U AC520U AC5025S	TT8080 TT8020
	S30		HR7225	GC1125		IC3028	MP9025	AH725	PR1535	AC520U		YBG212	

Comparison table of PVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT	
	IOS classification	Groups of materials											
PVD milling	P	P10	HR5110 HR5210	GC1010 GC1025 GC1030	KC5010M KC515M	IC807 IC903		AH120 AH725	PR830 PR1025 PR1225	ACP2500 ACP200	TT2510 TT7080	YBG252	
			P20	HR5120 HR5220 HR5130	GC1025 GC1030 GC2030	KC522M KC525M KCSM30 SP6519	IC807 IC808 IC810 IC380 IC330	MP6120 VP15TF	AH120 AH725 AH3135 AH9030 AH3225 AH9130	PR1525 PR830 PR1025 PR1225 PR1230	ACP3000 ACU2500 ACP200 ACP300	TT2510 TT7080 TT8020 TT9030 TT9080	YBG202 YBG205 YBG9320 YBG252
		P30		HR5120 HR5130 HR530 HR7130	GC1030 GC1010 GC2030	KC525M KC530 KC725M KC735M KCPM40 KCSM30 X400	IC328 IC330 IC380 IC830 IC928	MP6120 VP15TF MP6130 VP30RT	AH120 AH725 AH3135 AH130 AH3225 AH9130	PR1230 PR1535	ACP3000 ACU2500 ACP200 ACP300	TT8020 TT8080 TT9030 TT9080	YBG302
			P40	HR7130	GC1030 GC2030	KC725M KC735M KCPM40	IC830	VP30RT	AH120 AH725 AH645		ACP3000 ACU2500 ACP300	TT8020 TT8080 TT9030 TT9080	YBG302
		M	M10	HR5110 HR5120 HR5220	GC1010 GC1030	KC515M SP4019 SP6519	IC807 IC808 IC903 IC907 IC908		AH725	PR1025 PR1225	ACU2500 ACM100 ACK300 ACP300		YBG252
				M20	HR5110 HR5120 HR5220 HR5130	GC1030 GC1040 GC2030 S30T	KC522M KC525M SP4019 SP6519 X700	IC330 IC808 IC830 IC840 IC882 IC908 IC928	VP15TF MP7130 MP7030 VP20RT	AH725 AH3135 AH130 AH6030 AH3225 AH9130	PR1525 PR1025 PR1225	ACU2500 ACK300 ACP300	TT9030 TT9080
	M30		HR5120 HR5130 HR530		GC1040 S30T GC2030	KC522M KC525M KC725M KC735M KCPM40 KCSM30 KCSM40 SC6525 X700	IC328 IC330 IC830 IC840 IC882	VP15TF MP7130 MP7030 VP20RT MP7140	AH3135 AH130 AH9130	PR1535	TT8020 TT8080 TT9030 TT9080	TT8020 TT8080 TT9020 TT9080	YBG302
			M40	HR7130		KC725M KCPM40 KCSM40	IC830 IC928	MP7140 VP30RT	AH140		TT8020 TT8080 TT9030 TT9080	TT8020 TT8080 TT9020 TT9080	YBG302

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Comparison table of PVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT
	IOS classification	Groups of materials										
PVD milling	K	K10	HR5120 HR5220	GC1010 GC1020	KC514M KC515M KCK20 SP4019	IC810	MP8010	AH110 GH120	PR510 PR905 PR1210	ACK3000 ACU2500	TT6080	YBG102 YBG252
		K20	HR5120	GC1020	KC514M KC520M KC524M KCK20 SP6519	IC808 IC810 IC83	VP15TF VP20RT	AH120 AH9030 AH9130	PR905 PR1210	ACK3000 ACU2500 ACK300	TT6080	YBG152
		K30	HR5130		KC522M KC524M SP6519	IC830 IC810 IC908 IC910 IC928 IC950	VP15TF VP20RT	AH120		ACK3000 ACU2500 ACK300		

Comparison table of CVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT
	IOS classification	Groups of materials										
CVD turning	P	P01	HR8105 HR8115	GC4305 GC4315	KCP05B KCPK05 KCK05B KCK15B	IC8005 IC8150 IC428	UE6105	T9205 T9105	CA510 CA5505	AC8015P AC810P	TT8105	
		P10	HR8115	GC4305 GC4415 GC4325	KCP05B KCPK05 KCP10B KCK15B KCK20B	IC5100 IC8150 IC8250 IC9015	UE6105 MC6015 UE6110 MY5015	T9205 T9105 T9215 T9115	CA510 CA515 CA5505 CA5515	AC8015P AC810P	TT8105 TT8115	YBC151 YBC152
		P20	HR8125 HR8225	GC4225 GC4325 GC4425	KCP10B KCP25B KCM15B	IC8150 IC8250 IC8350 IC9015	MC6015 UE6110 MC6025 UE6020 MY5015	T9215 T9115 T9225 T9125	CA025P CA525 CA5515 CA5525 CR9025	AC8025P AC820P	TT5100 TT8125	YBC251 YBC252
		P30	HR8225 HR8135	GC4315 GC4325 GC4335 GC2025	KCP25B KCP30B KCM15B	IC8350 IC8025	MC6025 UE6020 MC6035 UE6035 UH6400	T9225 T9125 T9235 T9135 T6130	CA025P CA525 CA5525 CA530 CA5535 CA9025	AC8035P AC830P AC6030M AC630M	TT8125 T5100	YBC252 YBC351 YBC352
		P40	HR8225 HR8135	GC4325 GC4335	KCP30B KCP40B KCM25B KCM35B	IC8350 IC8025	MC6035 UE6035 UH6400		CA530 CA5535	AC8035P AC830P AC6030M AC630M	TT8135 TT7100	YBC351 YBC352
	M	M10		GC2015 GC1515	KCM15B	IC6015 IC8025 IC8150 IC8250 IC5820	MC7015 US7020	T9235 T9135 T6130	CA6515	AC6020M AC610M	TT9215	
		M20		GC2015 GC2025 GC2020	KCP30B KCP40B KCM15B KCM25B	IC6015 IC6025 IC8320	MC7015 US7020 MC7025	T9215 T9115	CA6525	AC6020M AC6030M AC610M AC630M	TT9225	YBM151 YBM153
		M30		GC2025 GC2020	KCP40B KCM25B KCM35B	IC6025	MC7025 US735	T6120 T9215 T9115		AC6030M AC630M AC8035P AC830P	TT9235	YBM151 YBM251
		M40			KCM35B KCM35		US735	T6130		AC6030M AC630M	TT9235	YB253

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Comparison table of CVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT	
	IOS classification	Groups of materials											
CVD turning	K	K01		GC3210	KCK05B KCK05	IC5005	MC5005 UC5105	T5105	CA310 CA4010 CA4505 CA5505	AC4010K AC405K	TT7005	YBD052	
		K10	HR6115	GC3210	KCK05B KCK05 KCK15B KCK15	IC5005 IC5010 IC5100	MC5015 UC5115 MY5015	T5105 T515 T5115 T9215	CA310 CA315 CA4010 CA4115 CA4505 CA4515 CA5505	AC4010K AC4015K AC405K AC415K	TT7015	YBD102	
		K20	HR6115	GC3210 GC3225	KCK15B KCK15 KCK20B KCK20	IC5010 IC8150	MC5015 UC5115 UE6110 MY5115	T515 T5115 T5125 T9215	CA315 CA320 CA4115 CA4120 CA4515	AC4015K AC415K AC420K AC425K AC8025P	TT7015 TT7025	YBD152 YBD252	
		K30	HR6115	GC3225	KCP05B KCPK05 KCP10B KCP25B KCK20B		UE6110	T5125	CA320				

Comparison table of CVD turning grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT
	IOS classification	Groups of materials										
CVD turning	P	P10		GC4220 GC4230 GC3040	KC930M KC935P	IC4100 IC520M IC4050 DT7150 IC5400				ACP2000 ACP100	TT7515	
		P20	HR6130	GC4220 GC4230 GC3040	SC6525 SP6519		F7030 MC7020	T3225		ACP2000 ACP100	TT7515	YBC301 YBC251
		P30	HR6130 HR8140	GC4230 GC3040 GC2040 M30B	MP91M SC6525 KCPK30 X500		F7030 MC7020	T3130 T3225		ACP2000 ACP100	TT7800	YBM351
		P40	HR8140	GC4240 GC4230 GC3040 GC2040 M30B	KCPK30 X500						TT7800	YBC302
CVD milling	M	M10								ACM200		
		M20		GC2040 GC4230	SC6525		F7030 MC7020	T3225	CA6535	ACM200		YBM251 YBM253
		M30		GC2040 GC4230 GC4240 M30B S40T	SC6525 X500	IC5820	F7030 MC7020	T3225 T3130		ACM200	TT7800	YBM302
		M40		GC2040 M30B S40T GC4240	X500					ACM200	TT7800	
K	K10			SC3025 KCK15	IC5100	MC5020	T1215 T1115			ACK2000 ACK100 ACK200	TT7515	YBD151
	K20	HR6130	GC3220 K20W	KCK15 SC3025 MP91M	IC5100 DT7150 IC4010 IC4050 IC4100	MC5020	T1215	CA420M	ACK200 ACK200	TT7515	YBD252	
	K30	HR6130 HR8140	GC3040	MP91M KCPK30 SC6525							YBD252	


A
General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

A
General turning
Turning of small components
Parting and grooving
Threading
Indexable milling
Solid carbide end mill
Short hole drill
Solid carbide drill

Comparison table of cermet grades

Type	Classification codes		HUAREAL	SANDVIK	KENNAMETAL	ISCAR	MITSUBISHI	TUNGALOY	KYOCERA	SUMITOMO	TEAGUTEC	ZCC.CT
	IOS classification	Groups of materials										
Cermet P		P10	HRC10		KT1120	IC20N	NX1010	NS520	TN610	T110A T1000A		
		P20	HRC10	CT5015	KT1120 KT175	IC20N IC75T	NX2525	NS520 NS9530	TN610 TN60	T1200A T1500A	CT3000	YNG151 YNG151C
		P30	HRC10	CT5015	KT125	IC20N IC75T IC30N	NX2525 NX3035	NS9530 NS530 NS730	TN620 TN90	T1200A T1500A	CT3000	
		P40				IC75T IC30N	NX3035 NX4545	NS740		T250A		

Formulas for turning

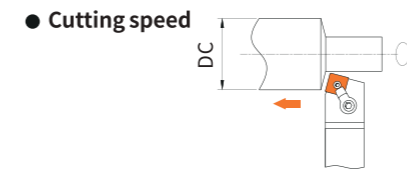

● Cutting speed

$$V_c = \frac{\pi * D_c * n}{1000} \text{ (m/min)}$$

Vc: Cutting speed (m/min) π: ≈ 3.14
Dc: Workpiece diameter (mm) n: Spindle speed (rev/min)

● Feed rate

$$V_f = f * n \text{ (mm/min)}$$

Vf: Feed rate (mm/min) f: Feed per revolution (mm/rev)
n: Spindle speed (rev/min)

● Chip thickness

$$h = f * \text{sinkr} \text{ (mm)}$$

h: Chip thickness (mm) f: Feed per revolution (mm/rev)

● Chip width

$$b = \frac{a_p}{\text{sinkr}} \text{ (mm)}$$

b: Chip width (mm) ap: Cutting depth (mm)

● Chip cross section

$$A = h * b = a_p * f \text{ (mm}^2\text{)}$$

A: Chip cross section (mm²) ap: Cutting depth (mm)
f: Feed per revolution (mm/rev)

● Cutting force

$$F_c = K_c * a_p * f \text{ (N)}$$

Fc: Cutting force (N) Kc: Specific cutting force (N/mm²)
ap: Cutting depth (mm) f: Feed per revolution (mm/rev)

● Cutting power

$$P_{mot} = \frac{K_c * V_c * a_p * f}{60000 * \eta} \text{ (KW)}$$


Pmot: Cutting power (KW) Kc: Specific cutting force (N/mm²)
Vc: Cutting speed (m/min) ap: Cutting depth (mm)
f: Feed per revolution (mm/rev) η: Efficiency of machine

● Metal removal rate

$$Q = a_p * f * V_c \text{ (cm}^3\text{/min)}$$

Q: Metal removal rate (cm³/min) ap: Cutting depth (mm)
f: Feed per revolution (mm/rev) Vc: Cutting speed (m/min)


● Roughness profile depth



$$R_{max} = \frac{f^2}{8 * RE} * 1000 \text{ (um)}$$

Rmax: Roughness profile depth (um)
f: Feed per revolution (mm/rev) RE: Corner radius of insert (mm)

● Machining time



$$T_c = \frac{L}{f * n} \text{ (min)}$$

Tc: Machining time f: Feed per revolution (mm/rev)
n: Spindle speed (rev/min) L: Machined length (mm)

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

A

General turning

Turning of small components

Parting and grooving

Threading

B

Indexable milling

Solid carbide end mill

C

Short hole drill

Solid carbide drill

Formulas for milling

● Cutting Speed

$$Vc = \frac{\pi * Dc * n}{1000} \text{ (m/min)}$$

Vc: Cutting speed (m/min) π : = 3.14
Dc: Cutter diameter (mm) n: Spindle speed (rev/min)

● Spindle Speed

$$n = \frac{1000 * Vc}{\pi * Dc} \text{ (rev/min)}$$

Vc: Cutting speed (m/min) π : = 3.14
Dc: Cutter diameter (mm) n: Spindle speed (rev/min)

● Feed Rate

$$Vf = fz * n * Z \text{ (mm/min)}$$

Vf: Feed rate (mm/min) fz: Feed per tooth (mm/z)
n: Spindle speed (rev/min) Z: Number of tooth

● Feed Per Tooth

$$fz = \frac{Vf}{n * Z} \text{ (mm/z)}$$

fz: Feed per tooth (mm/z) Vf: Feed rate (mm/min)
n: Spindle speed (rev/min) Z: Number of tooth

● Feed per revolution

$$f = \frac{Vf}{n} \text{ (mm/rev)}$$

f: Feed per revolution (mm/rev) Vf: Feed rate (mm/min)
n: Spindle speed (rev/min)

● Cutting Time

$$Tc = \frac{L}{Vf} \text{ (min)}$$

Tc: Cutting time (min) L: Length of cut (mm)
Vf: Feed rate (mm/min)

● Horse Power

$$Hp = \frac{Pmot}{0.75}$$

HP: Horse power Pmot: Cutting power (KW)

● Power Requirement

$$Pmot = \frac{ap * ae * Vf * Kc}{6 * 10^7 * \eta} \text{ (KW)}$$

Pmot: Cutting power (KW) ap: Cutting depth ae: Cutting width
Kc: Specific cutting force (N/mm²) η : Machine efficiency rate (0.7-0.95)

● Medium Chip Thickness

$$hm = \frac{114.7 * fz * \text{sink} * (ae/Dc)}{\psi_s} \text{ (mm)}$$

hm: Medium chip thickness fz: Feed per tooth (mm/z) ae: Cutting width
Dc: Cutter diameter (mm) ψ_s : Engagement angle

● Feed Force

Where cutter is positioned centrally

$$\psi_s = 2 * \arcsin \left(\frac{ae}{Dc} \right) [^\circ]$$

Where cutter is positioned eccentrically

$$\psi_s = 90^\circ + \arcsin \frac{ae - (Dc/2)}{(Dc/2)} [^\circ]$$

ψ_s : Engagement angle

ae: Cutting width Dc: Cutter diameter (mm)

● Metal Removal Rate

$$Q = \frac{ap * ae * Vf}{1000} \text{ (cm}^3\text{/min)}$$

Q: Metal removal rate (cm³/min) ap: Cutting depth ae: Cutting width
Vf: Feed rate (mm/min)

Formulas for drilling

● Cutting speed

$$Vc = \frac{\pi * Dc * n}{1000} \text{ (m/min)}$$

Vc: Cutting speed (m/min) π : = 3.14
Dc: Cutter diameter (mm) n: Spindle speed (rev/min)

● Spindle speed

$$n = \frac{1000 * Vc}{\pi * Dc} \text{ (rev/min)}$$

Vc: Cutting speed (m/min) π : = 3.14
Dc: Cutter diameter (mm) n: Spindle speed (rev/min)

● Feed rate

$$Vf = fz * n * Z \text{ (mm/min)}$$

Vf: Feed rate (mm/min) fz: Feed per tooth (mm/z)
n: Spindle speed (rev/min) Z: Number of tooth

● Feed per revolution

$$fz = \frac{Vf}{n * Z} \text{ (mm/z)}$$

fz: Feed per tooth (mm/z) Vf: Feed rate (mm/min)
n: Spindle speed (rev/min) Z: Number of tooth

● Feed per revolution

$$f = \frac{Vf}{n} \text{ (mm/rev)}$$

f: Feed per revolution (mm/rev) Vf: Feed rate (mm/min)
n: Spindle speed (rev/min)

● Metal removal rate

$$Q = \frac{Vf * \pi * Dc^2}{4 * 1000} \text{ (cm}^3\text{/min)}$$

Q: Metal removal rate (cm³/min) Vf: Feed rate (mm/min)
 π : = 3.14 Dc: Drilling tool diameter (mm)

● Horse power

$$Hp = \frac{Pmot}{0.75}$$

Hp: Horse power Pmot: Cutting power (KW)

● Power requirement

$$Pmot = \frac{Q * Kc}{60000 * \eta} \text{ (KW)}$$

Pmot: Cutting power (KW) Q: Metal removal rate (cm³/min)
Kc: Specific cutting force (N/mm²) η : Machine efficiency rate (0.7-0.95)

● Torque

$$Mc = \frac{Dc^2 * Kc * f}{8000} \text{ (N*m)}$$

Mc: Torque Dc: Drilling tool diameter (mm)
Kc: Specific cutting force (N/mm²) f: Feed per revolution (mm/rev)

● Feed force

$$Ff = 0.63 * \frac{f * Dc * Kc}{2} \text{ (N)}$$

Ff: Feed force f: Feed per revolution (mm/rev)
Dc: Drilling tool diameter (mm) Kc: Specific cutting force (N/mm²)

● Chip thickness

$$h = fz * \text{sink} \text{ (mm)}$$

h: Chip thickness (mm) fz: Feed per revolution (mm/rev)

